




COMPRESSION FITTINGS

Compression fittings are available in Acetal, Nylon, Polypropylene, PVDF, Brass, and Nickel-Plated Brass. Used with hard and soft tubing lines for coupling to instrumentation equipment, Potable water, and chemical lines. F.D.A. and N.S.F.-approved plastics.

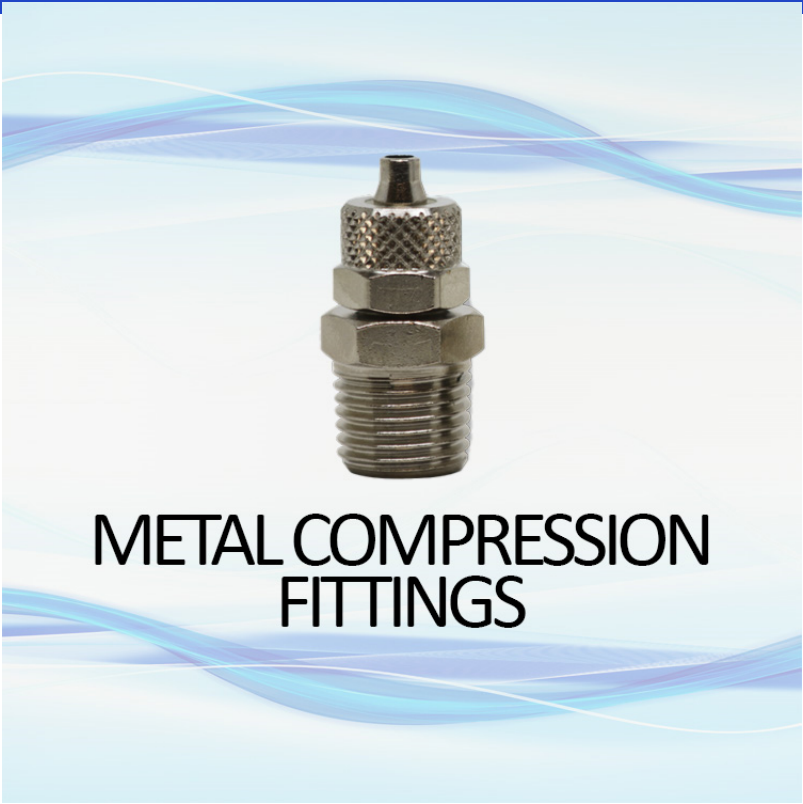

METAL COMPRESSION FITTINGS

Find the right metal compression fittings for the job, here at Pneuline Supply! Request a Quote Today!

MCC SERIES



The MCC Series is a Chrome-Plated Brass Ferrules Compression fitting. The pressure range is vacuum to 100 psi and the working temperature range is -40°F to 180°F. Tubing options for use with this fitting are Polyethylene, Polyurethane, and PVC. Sizes available for pipe thread are: 10-32 inch male UNF, 1/8 inch MNPT and 1/4 inch MNPT. Available tubing sizes are: 1/8 inch, 1/4 inch, and 3/8 inch.

SKU	Description
MCC-1018	10-32 inch Male UNF with 5/64 inch ID by 1/8 inch OD Chrome-Plated Brass Compression Fitting
MCC-1014	10-32 inch Male UNF with .170 inch ID by 1/4 inch OD Chrome-Plated Brass Compression Fitting
MCC-2M18	1/8 inch MNPT with 5/64 inch ID by 1/8 inch OD Chrome-Plated Brass Compression Fitting
MCC-2M14	1/8 inch MNPT with .170 inch ID by 1/4 inch OD Chrome-Plated Brass Compression Fitting

SKU	Description
MCC-2M38	1/8 inch MNPT with 1/4 inch ID by 3/8 inch OD Chrome-Plated Brass Compression Fitting
MCC-4M14	1/4 inch MNPT with .170 inch ID by 1/4 inch OD Chrome-Plated Brass Compression Fitting
MCC-4M38	1/4 inch MNPT with 1/4 inch ID by 3/8 inch OD Chrome-Plated Brass Compression Fitting

INDEX

M

MCC Series 2