


BRASS FITTINGS

Pneuline Supply, Inc. supplies a wide variety of Brass Fittings including: Adapters, Couplings, Elbows, Nipples, Unions, Tees, Plugs, Swivel, Pipe Fittings and Caps, Hose Barb Fittings, Bite-Style, Wye, and more. Uses of Brass Fittings include: Water, Chemicals, Flammable Gases, Slurries, and other plumbing substances. Brass Fittings can accommodate pressures of 400 psi depending on the design, type, size, and application however most small brass fittings are rated for lower pressure with nominal pressures of 200 psi and temperature ranges from -65 degrees F to +250 degrees F.



HOSE BARB FITTINGS

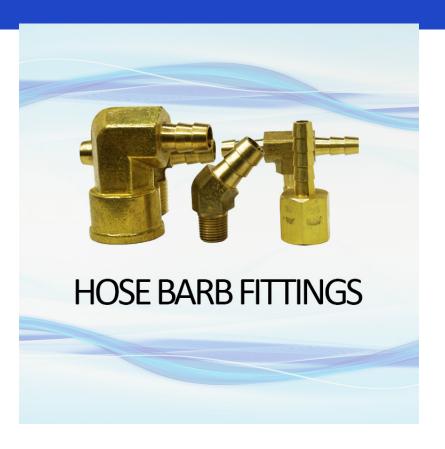

DCP SERIES

The DCP Series is a Brass 10-32 inch male UNF thread to multi-barb adapter. It is available with 2, 3, or 4 barbs. Available barb sizes are 1/16 inch and 1/8 inch ID. This series works well with Polyurethane tubing. The maximum working pressure is 150 psi and the temperature range is -65° F to 90° F.

| SKU | Description |
|------------|--|
| DCP-10-2DB | 10-32 inch UNF by 1/8 inch Double Barb Brass Adapter |
| DCP-10-2Q | 10-32 inch UNF by Quad 1/8 inch Barb Brass Adapter |
| DCP-10-2TB | 10-32 inch UNF by 1/8 inch Triple Barb Brass Adapter |



BHT SERIES

The BHT Series is a forged Brass multi-barbed Tee connector. Available barb sizes are 1/8 inch, 1/4 inch, and 3/4 inch. The working temperature range is -40° F to 160° F. Maximum working pressure is 150 psi. This fitting is designed for use with a hose clamp.

| SKU | Description |
|--------|---|
| BHT-2 | 1/8 inch Brass Multi-Barbed Tee Connector |
| BHT-4 | 1/4 inch Brass Multi-Barbed Tee Connector |
| BHT-34 | 3/4 inch Brass Multi-Barbed Tee Connector |



BHMT SERIES

Brass Tee. The size available is 1/4" male NPT threads to 3/8" barb. The maximum pressure for this Tee is 150 psi and the temperature range is -40° F to 160° F. Designed to be used with hose clamps.

| SKU | DESCRIPTION |
|-----------|--------------------------------|
| RHMT-4M6R | 1/4 MNPT to 3/8 Barh Brass Tee |



BHME45 SERIES

Forged Brass multi-barbed 45° Elbow with male NPT threads. Flow can be equal or reduced. The temperature range is -40° F to 160° F and the working pressure is 150 psi. Barstock is optional on the sizes shown below.

| SKU | Description |
|---------------|---|
| BHME45-2M6B | 1/8 inch MNPT by $3/8$ inch Brass Multi-Barbed 45 Degree Elbow Adapter |
| BHME45-2M4B | 1/8 inch MNPT by $1/4$ inch Brass Multi-Barbed 45 Degree Elbow Adapter |
| BHME45-4M4B | 1/4 inch MNPT by $1/4$ inch Brass Multi-Barbed 45 Degree Elbow Adapter |
| BHME45-4M4B-B | 1/4 inch MNPT by $1/4$ inch Brass Multi-Barbed 45 Degree Barstock Elbow Adapter |
| BHME45-4M6B | 1/4 inch MNPT by 3/8 inch Brass Multi-Barbed 45 Degree Elbow Adapter |
| BHME45-4M8B | 1/4 inch MNPT by $1/2$ inch Brass Multi-Barbed 45 Degree Elbow Adapter |
| BHME45-6M6B | 3/8 inch MNPT by $3/8$ inch Brass Multi-Barbed 45 Degree Elbow Adapter |
| BHME-456M8B | 3/8 inch MNPT by $1/2$ inch Brass Multi-Barbed 45 Degree Elbow Adapter |
| BHME-456M10B | 3/8 inch MNPT by 5/8 inch Brass Multi-Barbed 45 Degree Elbow Adapter |



BHME SERIES

The BHME Series is a forged Brass multi-barbed 90° Elbow Adapter with male NPT threads. Available MNPT thread sizes range from 1/8 inch to 1 inch. Available barb sizes range from 3/16 inches to 3/4 inches. Flow can be equal or reduced. The working temperature range is -40° to 160° and the working pressure is 150 psi. Barstock is optional for some sizes (see list below).

| SKU | Description |
|----------------|---|
| BHME-2M3B | 1/8 MNPT by 3/16 Hose Barb Elbow Forged |
| BHME-2M4B | 1/8 MNPT By 1/4 Hose Barb Elbow Forged B |
| BHME-2M5B | 1/8 MNPT By 5/16 Hose Barb Elbow Forged |
| BHME-2M6B | 1/8 MNPT By 3/8 Barb Elbow Forged |
| BHME-38M18B-R2 | 3/8 MNPT By 1/8 Hose Barb Elbow Forged 2 Piece Unit |
| BHME-4M3B | 1/4 MNPT by 3/16 Hose Barb Elbow Forged |
| BHME-4M4B | 1/4 MNPT By 1/4 Hose Barb Elbow Forged B |

| SKU | Description |
|-------------|--|
| BHME-4M5B | 1/4 MNPT by 5/16 Hose Barb Elbow Forged |
| BHME-4M6B | 1/4 MNPT by 3/8 Hose Barb Elbow Forged B |
| BHME-4M8B | 1/4 MNPT By 1/2 Hose Barb Elbow Forged |
| BHME-6M4B-B | 3/8 MNPT By 1/4 Hose Barb Elbow Barstock |
| BHME-6M5B | 3/8 MNPT By 5/16 Hose Barb Elbow Forged |
| ВНМЕ-6М6В | 3/8 MNPT By 3/8 Hose Barb Elbow Forged B |
| BHME-6M8B | 3/8 MNPT By 1/2 Hose Barb Elbow Forged B |
| BHME-8M6B | 1/2 MNPT By 3/8 Hose Barb Elbow Forged |
| BHME-8M8B | 1/2 MNPT By 1/2 Hose Barb Elbow Forged |
| BHME-12M12B | 3/4 MNPT by 3/4 Barb Elbow |
| BHME-16M12B | 1 Inch MNPT by 3/4 Barb Elbow |



BHMA RIGID BRASS BARSTOCK ADAPTER

The BHMA Series is a rigid multi-barbed Brass Barstock Adapter. It adapts from male NPT threads to barbs. Available MNPT sizes range from 1/16 inch to 1 inch. Available barb sizes range from 1/8 inch to 3/4 inch. Flow can be equal or reduced. The temperature range is -40° F to 160° F and the working pressure is 150 psi.

| SKU | Description |
|--------------|--|
| BHMA-1M2B | 1/16 inch MNPT by 1/8 inch Brass Multi-Barbed Brass Straight Adapter |
| BHMA-1M4B | 1/16 inch MNPT by 1/4 inch Brass Multi-Barbed Brass Straight Adapter |
| BHMA-2M2B | 1/8 inch MNPT by 1/8 inch Brass Multi-Barbed Brass Straight Adapter |
| BHMA-2M2B-SH | 1/8 inch MNPT by $1/8$ inch Brass Multi-Barbed Brass Straight Adapter Short .475 |
| BHMA-2M3B | 1/8 inch MNPT by 3/16 inch Brass Multi-Barbed Brass Straight Adapter |
| BHMA-2M4B | 1/8 inch MNPT by 1/4 inch Brass Multi-Barbed Brass Straight Adapter |
| BHMA-2M5B | 1/8 inch MNPT by 5/16 inch Brass Multi-Barbed Brass Straight Adapter |
| BHMA-2M6B | 1/8 inch MNPT by 3/8 inch Brass Multi-Barbed Brass Straight Adapter |
| BHMA-2M8B | 1/8 inch MNPT by 1/2 inch Brass Multi-Barbed Brass Straight Adapter |
| BHMA-4M2B | 1/4 inch MNPT by 1/8 inch Brass Multi-Barbed Brass Straight Adapter |
| BHMA-4M4B | 1/4 inch MNPT by 1/4 inch Brass Multi-Barbed Brass Straight Adapter |
| BHMA-4M6B | 1/4 inch MNPT by 3/8 inch Brass Multi-Barbed Brass Straight Adapter |
| BHMA-4M8B | 1/4 inch MNPT by 1/2 inch Brass Multi-Barbed Brass Straight Adapter |
| BHMA-6M4B | 3/8 inch MNPT by 1/4 inch Brass Multi-Barbed Brass Straight Adapter |
| BHMA-6M6B | 3/8 inch MNPT by 3/8 inch Brass Multi-Barbed Brass Straight Adapter |
| BHMA-6M8B | 3/8 inch MNPT by 1/2 inch Brass Multi-Barbed Brass Straight Adapter |

| SKU | Description |
|-------------|---|
| BHMA-8M8B | 1/2 inch MNPT by 1/2 inch Brass Multi-Barbed Brass Straight Adapter |
| BHMA-12M12B | 3/4 inch MNPT by 3/4 inch Brass Multi-Barbed Brass Straight Adapter |
| BHMA-12M8B | 3/4 inch MNPT by 1/2 inch Brass Multi-Barbed Brass Straight Adapter |



BHM SERIES

The BHM Series is a barstock Brass multi-barbed straight connector. Barb sizes range from 1/8 inch to 1 inch. The working temperature range is -40° F to 160° F. Maximum pressure rating is 150 psi. This fitting is designed to be used with a hose clamp.

| SKU | Description |
|--------|--|
| BHM-2 | 1/8 inch by 1/8 inch Brass Multi-Barbed Straight Connector |
| BHM-3 | 3/16 inch by 3/16 inch Brass Multi-Barbed Straight Connector |
| BHM-4 | 1/4 inch by 1/4 inch Brass Multi-Barbed Straight Connector |
| BHM-5 | 5/16 inch by 5/16 inch Brass Multi-Barbed Straight Connector |
| BHM-6 | 3/8 inch by 3/8 inch Brass Multi-Barbed Straight Connector |
| BHM-8 | 1/2 inch by 1/2 inch Brass Multi-Barbed Straight Connector |
| BHM-10 | 5/8 inch by 5/8 inch Brass Multi-Barbed Straight Connector |
| BHM-12 | 3/4 inch by 3/4 inch Brass Multi-Barbed Straight Connector |

BHFT SERIES



The BHFT Series is a multi-barbed Brass Tee Adapter with female NPT threads to barbs. FNPT thread sizes are: 1/8 inch, 1/4 inch, and 3/8 inch. Barb sizes are 1/4 inch, 5/16 inch, and 3/8 inch. This series is in Barstock only. Available in Nickel Plate.

| SKU | Description |
|-----------|---|
| BHFT-2F4B | 1/8 inch FNPT by 1/4 inch Brass Multi-Barbed Tee Adapter |
| BHFT-2F5B | 1/8 inch FNPT by 5/16 inch Brass Multi-Barbed Tee Adapter |
| BHFT-2F6B | 1/8 inch FNPT by 3/8 inch Brass Multi-Barbed Tee Adapter |
| BHFT-4F4B | 1/4 inch FNPT by 1/4 inch Brass Multi-Barbed Tee Adapter |
| BHFT-4F6B | 1/4 inch FNPT by 3/8 inch Brass Multi-Barbed Tee Adapter |
| BHFT-6F6B | 3/8 inch FNPT by 3/8 inch Brass Multi-Barbed Tee Adapter |

BHFE SERIES



The BHFE Series is a Brass 90° Elbow, Female NPT threads to multi-barb Adapter. Available FNPT sizes are 1/8 inch, 1/4 inch, and 3/8 inch. Available barb sizes are 1/4 inch, 5/16 inch, 3/8 inch, and 1/2 inch. The temperature range is -40° F to 160° F. The maximum working pressure is 150 psi. This fitting is intended for use with a hose clamp.

| SKU | Description |
|-----------|---|
| BHFE-2F4B | 1/8 inch FNPT by 1/4 inch Brass Multi-Barbed 90° Elbow Adapter |
| BHFE-2F5B | 1/8 inch FNPT by 5/16 inch Brass Multi-Barbed 90° Elbow Adapter |
| BHFE-2F6B | 1/8 inch FNPT by 3/8 inch Brass Multi-Barbed 90° Elbow Adapter |
| BHFE-4F4B | 1/4 inch FNPT by 1/4 inch Brass Multi-Barbed 90° Elbow Adapter |
| BHFE-4F5B | 1/4 inch FNPT by 5/16 inch Brass Multi-Barbed 90° Elbow Adapter |
| BHFE-4F6B | 1/4 inch FNPT by 3/8 inch Brass Multi-Barbed 90° Elbow Adapter |
| BHFE-4F8B | 1/4 inch FNPT by 1/2 inch Brass Multi-Barbed 90° Elbow Adapter |
| BHFE-6F4B | 3/8 inch FNPT by 1/4 inch Brass Multi-Barbed 90° Elbow Adapter |
| BHFE-6F6B | 3/8 inch FNPT by 3/8 inch Brass Multi-Barbed 90° Elbow Adapter |
| BHFE-6F8B | 3/8 inch FNPT by 1/2 inch Brass Multi-Barbed 90° Elbow Adapter |
| BHFE-8F6B | 1/2 inch FNPT by 3/8 inch Brass Multi-Barbed 90° Elbow Adapter |



BHFA SERIES

The BHFA Series is a Brass multi-barbed rigid female barstock adapter. It has Female NPT threads on the opposite side of the barbed end. Available FNPT thread sizes are 1/8 inch, 1/4 inch, 3/8 inch, 1/2 inch, and 3/4 inch. Available barb sizes range from 1/8 inch to 1 inch. Flow can be equal or reduced. The temperature range is -40° F to 160° F and the working pressure is 150 psi.

| SKU | Description |
|-----------|---|
| BHFA-2F2B | 1/8 inch FNPT by 1/8 inch Brass Multi-Barbed Adapter |
| BHFA-2F3B | 1/8 inch FNPT by 3/16 inch Brass Multi-Barbed Adapter |
| BHFA-2F4B | 1/8 inch FNPT by 1/4 inch Brass Multi-Barbed Adapter |
| BHFA-2F5B | 1/8 inch FNPT by 5/16 inch Brass Multi-Barbed Adapter |
| BHFA-2F6B | 1/8 inch FNPT by 3/8 inch Brass Multi-Barbed Adapter |
| BHFA-4F2B | 1/4 inch FNPT by 1/8 inch Brass Multi-Barbed Adapter |
| BHFA-4F3B | 1/4 inch FNPT by 3/16 inch Brass Multi-Barbed Adapter |
| BHFA-4F4B | 1/4 inch FNPT by 1/4 inch Brass Multi-Barbed Adapter |
| BHFA-4F5B | 1/4 inch FNPT by 5/16 inch Brass Multi-Barbed Adapter |
| BHFA-4F6B | 1/4 inch FNPT by 3/8 inch Brass Multi-Barbed Adapter |
| BHFA-4F8B | 1/4 inch FNPT by 1/2 inch Brass Multi-Barbed Adapter |
| BHFA-6F4B | 3/8 inch FNPT by 1/4 inch Brass Multi-Barbed Adapter |
| BHFA-6F5B | 3/8 inch FNPT by 5/16 inch Brass Multi-Barbed Adapter |
| BHFA-6F6B | 3/8 inch FNPT by 3/8 inch Brass Multi-Barbed Adapter |
| BHFA-6F8B | 3/8 inch FNPT by 1/2 inch Brass Multi-Barbed Adapter |
| BHFA-8F6B | 1/2 inch FNPT by 3/8 inch Brass Multi-Barbed Adapter |
| BHFA-8F8B | 1/2 inch FNPT by 1/2 inch Brass Multi-Barbed Adapter |



BHBE SERIES

The BHBE Series is a forged Brass multi-barbed 90° Elbow connector. Barb sizes range from 1/8 inch to 1/2 inch. The working temperature range is -40° F to 160° F. Maximum pressure rating is 150 psi. This fitting is designed to be used with a hose clamp.

| SKU | Description |
|----------|--|
| BHBE-4-2 | 1/4 inch by 1/8 inch Brass Multi-Barbed Reducing Elbow Connector |
| BHBE-4-4 | 1/4 inch by 1/4 inch Brass Multi-Barbed Elbow Connector |
| BHBE-5-5 | 5/16 inch by 5/16 inch Brass Multi-Barbed Elbow Connector |
| BHBE-6-2 | 3/8 inch by 1/8 inch Brass Multi-Barbed Reducing Elbow Connector |
| BHBE-6-4 | 3/8 inch by 1/4 inch Brass Multi-Barbed Reducing Elbow Connector |
| BHBE-6-6 | 3/8 inch by 3/8 inch Brass Multi-Barbed Elbow Connector |
| BHBE-8-4 | 1/2 inch by 1/4 inch Brass Multi-Barbed Reducing Elbow Connector |
| BHBE-8-6 | 1/2 inch by 3/8 inch Brass Multi-Barbed Reducing Elbow Connector |
| BHBE-8-8 | 1/2 inch by 1/2 inch Brass Multi-Barbed Elbow Connector |



BBX SERIES

This series of Brass connectors is composed of straight connectors, elbows, tees, and crosses. The working temperature range is -40° F to 160° F. The straights, tees, and crosses have equal barb sizes. The elbows are both equal and reducing. These fittings are designed for use with hose clamps.

| SKU | Description |
|-------|--|
| BBX-4 | 1/4 inch Brass Multi-Barbed Cross Connector |
| BBX-5 | 5/16 inch Brass Multi-Barbed Cross Connector |
| BBX-6 | 3/8 inch Brass Multi-Barbed Cross Connector |

ATD SERIES



Adjustable Brass Tee adapter with UNF threads by single barbs.

| SKU | DESCRIPTION |
|------|-------------|
| 0.10 | |

| ATD-1018 | 10-32 by 1/8 Barb Adjustable Tee |
|-----------|-----------------------------------|
| ATD-10X1B | 10-32 by 1/16 Barb Adjustable Tee |

AED SERIES



The AED Series are Adjustable 10-32 inch male UNF to barb Brass elbows in 1/16 inch or 1/8 inch single barbs.

| SKU | Description |
|-----------|--|
| AED-1018 | 10-32 inch Male UNF by 1/8 inch Barbed Adjustable Elbow |
| AED-10X1B | 10-32 inch Male UNF by 1/16 inch Barbed Adjustable Elbow |
| AED-10X2B | 10-32 inch Male UNF by 1/8 inch Barbed Adjustable Elbow |



AC SERIES

These Connectors are Brass with male or female threads on one end with a nut for tightening. The other end is smooth for ease in attaching tubing. They will connect to any 10-32 threaded inlet. The OD tube sizes are 5/32", 1/4", and 3/8".

186-2 SERIES



The 186-2 Series Brass Barb Fittings are designed to fit .073 hole using a Loctite adhesive.

SKU Description

186-2 1/16 inch Barbed Brass Bondable Insert

INDEX

DCP Series 2

1 186-2 Series 11 Α AC Series 11 AED Series 10 ATD SERIES 10 В BBX Series 9 BHBE Series 9 BHFA Series 8 BHFE Series 7 BHFT Series 7 BHM Series 6 BHMA RIGID BRASS BARSTOCK ADAPTER 5 BHME Series 4 BHME45 Series 4 **BHMT SERIES 3** BHT Series 3 D