



VALVES

Valves make up the first step beyond the compressor or pump to direct, divert, decrease, or stop, the flow of Liquids or Gases.



FLOW CONTROL VALVES




VRV - VENT TO ATMOSPHERE RELIEF VALVE

This is a vent-to-atmosphere Relief Valve. It is an accurate design that offers repeatability and dependability. Cracking pressure is set and tested for accuracy. Male NPT threads in 1/4", 3/8" and 1/2" sizes. Maximum pressure is 200 psi. Made of Nickel-plated Brass, 303 Stainless Steel and Brass. Optional dust cover is available.

SKU	Description
VRV-14-10E-CAL	1/4 inch Male NPT 10 psi EPDM Cap Aluminum Relief Valve
VRV-14-10-NP	1/4 inch Male NPT 10 psi Nickel-Plated Relief Valve
VRV-12-90	1/2 inch Male NPT 90 psi Brass Relief Valve
VRV-38-30-303	3/8 inch Male NPT 30 psi 303 Stainless Steel Relief Valve

MINIATURE STOPCOCK

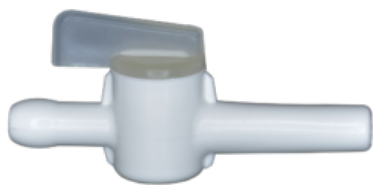

This is a miniature stopcock made of high-density polypropylene. The key turns easily so no lubricant is needed, eliminating blockage of the bores with grease. This is not for pressurized lines.

HFSC SERIES STOPCOCKS



4-way Stopcock is available in Polycarbonate, Acetal, Polyethylene, HDPE, Acrylic and Silicone. These Stopcocks are chemically resistant and not made with DEHP. Connection options include male luer slip, male luer lock, male luer with spin lock, rotating male luer lock, female luer lock, and tubing ports. Psi is 50, higher pressures are available on request.

SKU	DESCRIPTION
HFSC-4-MSFF-PC	4-Way Stopcock Male Slip by FF Polycarbonate
HFSC-4-FFF-PC	4-Way Stopcock FFF Polycarbonate
HFSC-4-FFM-PC	4-Way Stopcock FFM Polycarbonate
HFSC-4-FMM-PC	4-Way Stopcock FMM Polycarbonate
HFSC-4-FMF-PC	4-Way Stopcock FMF Polycarbonate
HFSC-4-MFF-PC	4-Way Stopcock MFF Polycarbonate
HFSC-4-MFM-PC	4-Way Stopcock MFM Polycarbonate
HFSC-4-MMF-PC	4-Way Stopcock MMF Polycarbonate
HFSC-4-MMM-PC	4-Way Stopcock MMM Polycarbonate
HFSC-4-MSFF-PC	4-Way Stopcock Male Slip by FF Polycarbonate

DMF SERIES - FLOW CONTROL VALVES



These Flow Control Valves made of Aluminum, can be used for air and oil. The maximum working pressure is 250 psi and the temperature range is -40°F to 250°F. Sizes available are 1/4-28 Male/Female and 1/8", 1/4", 3/8", 1/2" Female NPT. These valves control flow in one direction with free flow in the opposite direction.

SKU		DESCRIPTION
DMF-2F	1/8"	FNPT Aluminum Flow Control Valve
DMF-4F	1/4"	FNPT Aluminum Flow Control Valve
DMF-6F	3/8"	FNPT Aluminum Flow Control Valve
DMF-8F	1/2"	FNPT Aluminum Flow Control Valve



REGULATORS

Request a quote today!



RWL SERIES

Water Pressure Regulator made of NSF approved Thermoplastics with FDA grade EPDM disc, Buna-N diaphragm and seals. It has a straight through or 90° inlet to outlet option and a clean out plug on the bottom. The temperature range is 33° F to 150° F and the maximum operating pressure is 300 psi. The inlet and outlet sizes are 1/4" and the regulator can have either 2 or 4 outlets.

SKU	DESCRIPTION
RWL-2-14-125	2-1/4 ports 0- 125 psi Water Regulator
RWL-2-14-25	2-1/4 ports 0- 25 psi Water Regulator
RWL-2-14-60	2-1/4 ports 0- 60 psi Water Regulator
RWL-25	4-1/4 ports 0-25 psi Water Regulator
RWL-4-14-25	4 1/4 ports 0- 25 psi Water Regulator

SKU	DESCRIPTION
RWL-4-14-60	4 1/4 ports 0- 60 psi Water Regulator
RWL-4-14-125	4 1/4 ports 125 psi Water Regulator



RP

This Pressure Regulator is made of NSF approved Acetal with port sizes of 1/4" (R25) and 3/8" (R45). Both have 1/4" gauge port threads. The maximum supply pressure is 125 psi and the temperature range is 40° F to 125° F. The spring pressure ranges are 0-25 psi, 0-60 psi and 0-125 psi. This Regulator is recommended for compressed air. The 1/4" regulator is relieving and the 3/8" is non-relieving.



RAAW SERIES

1/8" or 1/4" 4-port mini air Regulator made of glass-filled Nylon with Buna-N seals. The supply pressure is 250 psi with a standard operating range of 5 – 125 psi, 3 – 60 psi and 3 – 20 psi. The temperature range is 40° F to 120° F. It has a 3-position non-rising adjustment knob which can be detached to make it tamper resistant. Also, a tamper-proof cap is included. This unit is lightweight, panel-mountable and the relieving style is standard.



RA SERIES

RA Series are precision relieving regulators made of a Polysulfone body with EPDM seals, Stainless steel springs. 150 PSI maximum input with a 24 turn adjust allows settings to 1 Inch WC. Available with threads of 10-32 Female or 1/8 inch NPT. These non-relieving regulators can be purchase in a low profile preset design with pressure ranges are 3.5, 10, 30, 60, or 90 psi. Optional with a standard screwdriver slot adjustment. Can be purchased as a reliving regulator. Used for robotics, medical equipment, and process control applications.

SKU	Description
RA-10-18F-K	Regulator 10 psi 1/8 inch NPT Knob
RA-18-10WK	Regulator 10 psi 1/8 inch NPT 0-10 Knob
RA-18-3.5WK	Regulator 10 psi 1/8 inch NPT 0-10 Knob
RA-18-30WK	Regulator 30 psi 1/8 inch NPT 0-30 Knob
RA-18-NR-10WOS	Regulator NR 10 psi 1/8 inch NPT 0-10 WOS
RA-30-1032-K-R	Regulator 30 psi 10-32 Ports Knob Relieving
RA-1032-3.5P	10-32 Female 3.5 psi Relieving
RA-1032-10P	10-32 Female 10 psi Relieving
RA-1032-30P	10-32 Female 30 psi Relieving
RA-1032-60P	10-32 Female 60 psi Relieving
RA-1032-10P-SL-R	10-32 Female 10 psi with Screwdriver Slot, Relieving



NRM NON RELIEVING ACETAL REGULATOR

This non-relieving Regulator is made of NSF and FDA approved Acetal with Stainless Steel and food grade EPDM elastomer. It has 1/4" female NPT inlet and outlet ports. It can be used for potable and deionized water. There is an adjustable pressure knob. The maximum pressure is 150 psi and the temperature range is 35° F to 125° F. There is an available regulator for compressed air and non-potable water.

SKU	DESCRIPTION
NRM-10	1/4 FNPT Preset 3 psi, 0-10 range
NRM-25	1/4 FNPT Preset 15 psi, 0-25 range
NRM-50	1/4 FNPT Preset 40 psi, 5-50 range
NRM-125	1/4 FNPT Preset 50 psi, 5-125 range



NBR SERIES

2-way non-exhausting Air Regulator is made of Electroless Nickel Plated Brass with a small knurled knob and is panel mountable. The input port can be 10-32 male or female threads; 1/16", 3/32" and 1/8" Barb; 1/8" Female NPT or 1/4-20 Female threads. The outlet port can be 10-32 male or female threads or 1/16", 3/32" or 1/8" Barb. The panel mount threads are 15/32-32. The maximum operating pressure is 5 to 80 psi and the maximum operating temperature is 180° F. 3-way exhausting is also available.



RELIEF VALVES

Relief Valves distributed by Pneuline Supply, Inc. are Spring-Loaded Valves, typically with preset pressures. Available in various Plastics and Metals. Manual Bleed Valves, including Slide Valves, offer an easy solution for the release of excess pressure from a system.



VRV - VENT TO ATMOSPHERE RELIEF VALVE

This is a vent-to-atmosphere Relief Valve. It is an accurate design that offers repeatability and dependability. Cracking pressure is set and tested for accuracy. Male NPT threads in 1/4", 3/8" and 1/2" sizes. Maximum pressure is 200 psi. Made of Nickel-plated Brass, 303 Stainless Steel and Brass. Optional dust cover is available.

SKU	Description
VRV-14-10E-CAL	1/4 inch Male NPT 10 psi EPDM Cap Aluminum Relief Valve
VRV-14-10-NP	1/4 inch Male NPT 10 psi Nickel-Plated Relief Valve
VRV-12-90	1/2 inch Male NPT 90 psi Brass Relief Valve
VRV-38-30-303	3/8 inch Male NPT 30 psi 303 Stainless Steel Relief Valve



TBVA BRASS RELIEF VALVE

Brass Relief Valve with 1/8" male NPT threads and side exhaust. Maximum working pressure of 150psi.



PPBN SERIES

Electroless Nickel-plated Brass push-button Relief Valve is corrosion resistant. The operating pressure is 0 to 125 psi. Releases pressurized air at a rate of 100 in³ in 4 seconds. Available in NPT or UNF threads.

SKU	DESCRIPTION
PPBN-1032	10-32 Push Button Bleed Valve
PPBN-2M	1/8 NPT Push Button Bleed Valve
PPBN-4M	1/4 NPT Push Button Bleed Valve



STOPCOCKS

MINIATURE STOPCOCK



This is a miniature stopcock made of high-density polypropylene. The key turns easily so no lubricant is needed, eliminating blockage of the bores with grease. This is not for pressurized lines.

HFSC SERIES STOPCOCKS



4-way Stopcock is available in Polycarbonate, Acetal, Polyethylene, HDPE, Acrylic and Silicone. These Stopcocks are chemically resistant and not made with DEHP. Connection options include male luer slip, male luer lock, male luer with spin lock, rotating male luer lock, female luer lock, and tubing ports. Psi is 50, higher pressures are available on request.

SKU	DESCRIPTION
HFSC-4-MSFF-PC	4-Way Stopcock Male Slip by FF Polycarbonate
HFSC-4-FFF-PC	4-Way Stopcock FFF Polycarbonate
HFSC-4-FFM-PC	4-Way Stopcock FFM Polycarbonate
HFSC-4-FMM-PC	4-Way Stopcock FMM Polycarbonate
HFSC-4-FMF-PC	4-Way Stopcock FMF Polycarbonate
HFSC-4-MFF-PC	4-Way Stopcock MFF Polycarbonate
HFSC-4-MFM-PC	4-Way Stopcock MFM Polycarbonate
HFSC-4-MMF-PC	4-Way Stopcock MMF Polycarbonate
HFSC-4-MMM-PC	4-Way Stopcock MMM Polycarbonate
HFSC-4-MSFF-PC	4-Way Stopcock Male Slip by FF Polycarbonate

INDEX

D

DMF Series - Flow Control Valves 4

H

HFSC Series Stopcocks 3, 13

M

Miniature Stopcock 3, 12

N

NBR Series 8

NRM NON RELIEVING ACETAL REGULATOR 7

P

PPBN Series 11

R

RA Series 7

RAAW Series 6

RP 6

RWL Series 5

T

TBVA BRASS RELIEF VALVE 10

V

VRV - Vent to Atmosphere Relief Valve 2, 10