

MEDICAL GRADE

WPF SERIES | PLASTIC INLINE FILTERS



Plastic Inline Filters

WPF Series Filters are manufactured in-house to custom specification per customer requirements. Barbed and Luer connectors are available in various combinations such as...
- 1/8, 3/16, 1/4, 5/16, and 3/8 barbs. Male and Female Luers available. Our luer end can connect to any of the barb connections. Used for lab applications, medical applications, industrial products.

Filter Housings can be made from various materials such as:- Polypropylene, Polycarbonate, Nylon, Acetal, and PVDF

Operating Pressure is 50 PSI This series has a flat filter welded into the housing which are available in several different filter medias.

-Fabric

- Available in Polyester or Polypropylene fabric (PTFE or PVDF optional)
- Sizes include: 5, 10, 20, 44, 64, 75, 105, 150, 177, 200, 250 microns

-Porous high density polyethylene

- Hydrophobic in nature, therefor blocking most fluids
- Sizes include: 15-45, 45-90, and 90-160 microns

-Stainless steel

- Two grades available: 304 and 316L
- 304 is available in 61 micron(app 250 mesh), 74 micron(app 200 mesh), 103 micron(150 mesh), and 149 micron(100 mesh)
- 316SS available in 44 micron

Contact us for other available mesh sizes for special order.

[Download](#) the WPF Series Flyer

SKU	Description
WPF-2B-BKAC-45 HDPE	1/8 inch Barbed BK Acetal 45 HDPE In-Line Filter
WPF-2B-BKAC-80SS	1/8 inch Barbed BK Acetal 80 Mesh 304 In-Line Filter
WPF-2B-N	1/8 inch Barbed Nylon In-Line Filter
WPF-2B-N-10	1/8 inch Barbed 10 Micron Nylon Filter
WPF-2B-P-105	1/8 inch Barbed 105 Micron Polypropylene Filter
WPF-2B-PC-45PE	1/8 inch Barbed Polycarbonate with 45 micron Polyester filter
WPF-2B-PC-5PE	1/8 inch Barbed Polycarbonate with 5 Micron Polyester filter
WPF-2B-PC-20N	1/8 inch Barbed Polycarbonate with 20 Micron Nylon In-Line Filter


SKU	Description
WPF-2B-PC-30N	1/8 inch Barbed Polycarbonate with 30 Micron Nylon In-Line Filter
WPF-2B-NK-45 PE Medifab	1/8 inch Barbed PVDF 45 micron Medifab Filter
WPF-3B-N-30	3/16 inch Barbed 30 Micron Nylon Filter
WPF-3B-P	3/16 inch Barbed Polypropylene Filter
WPF-3B-P-130	3/16 inch Barbed 130 Micron Polypropylene Filter
WPF-3B-PC-200PE	3/16 inch Barbed with 200 Micron Polycarbonate Filter
WPF-3B-PVDF-250	3/16 inch Barbed 250 Micron PVDF Filter
WPF-4BHF-N-75N	1/4 inch High Flow Barbed Nylon with 75 Micron Filter
WPF-4BHF-PC-200PE	1/4 inch High Flow Barbed Polycarbonate with 200 Filter
WPF-4B-K-200SS	1/4 inch Barbed PVDF with 200 Micron Stainless Steel Filter
WPF-4B-K-250SS	1/4 inch Barbed PVDF with 250 Micron Stainless Steel Filter
WPF-4B-N-48	1/4 inch Barbed 48 Micron Nylon Filter
WPF-4B-P-149	1/4 inch Barbed 149 Micron Polypropylene Filter
WPF-4B-PVDF-250	1/4 inch Barbed 250 Micron PVDF Filter
WPF-FLMLLR-PC-200PE	Female to Male Luer, Polycarbonate, 200 Micron Polyester



TL SERIES - PLASTIC THUMB LATCH

Plastic Thumb Latch. 5/32 size available.

T-MB SERIES - TEE FITTINGS

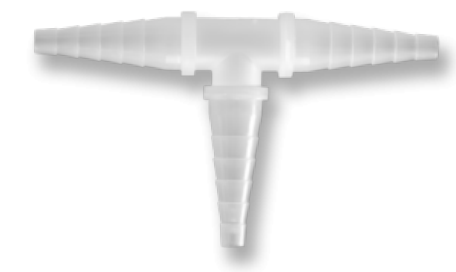

MPV-L SERIES | MEDICAL GRADE LUER
CHECK VALVES

Our MPV Luer Series Medical Grade Plastic Check Valves are manufactured, assembled, produced, 15 psi tested, and pre-packaged in a Class 7 Cleanroom environment

Check valves Made of: Polypropylene, Polycarbonate, Radiation-Stable Polycarbonate, and Kynar 720®.

4 Main Connector Options: Male Inlet Luer with Rotating Collar to Female Luer, Male Inlet Rotating Collar to Male Rotating Collar, Female Inlet Luer Lock to Female Luer Lock, Female Inlet Luer Lock to Male Slip, Barb to ***

Diaphragm options: Silicone

Flow Direction: Inlet to Outlet


***Custom Options: These Luers can be manufactured to fit with any of our Barb Connectors on the opposing end.

Barb Size options: 1/8 inch, 3/16 inch, 1/4 inch, 5/16 inch, 3/8 inch

MPV-L Series Product List

SKU	Description
MPV-FLL-PC-S	IN: Female Luer OUT: Female Luer
MLLR-PC-S	IN: Male Luer OUT: Male Luer w/Rotating Collar
FLL-MLLR-PC-S	IN: Female Luer OUT: Male Luer w/ Rotating Collar
MLLR-FLL-PC-S	IN: Male Luer Out: Female Luer

MPV SERIES | MEDICAL GRADE CHECK VALVES



MPV Series Medical Grade Check Valves are manufactured and tested in a Class 7 Cleanroom environment making them ideal for medical applications. All cleanroom check valves are tested in our clean room environments at 15 PSI. Resin options include: Nylon, Polypropylene, Polycarbonate, Radiation-stable Polycarbonate, and Kynar® 720. Other custom resins are available at the customer’s request. Sizes Available: 3/16 inch, 5/16 inch, and 3/8 inch high flow. Diaphragms are made of Silicone USP Class VI or FDA Viton®. Our custom molding options allow for customer specific needs or requirements which include resin options as well as diaphragm options.

[Download](#) the MPV Series Flyer

Medical Grade Plastic Diaphragm Check Valves

SKU	Description
MPV-2B-NS	1/8 Barb Nylon / FDA Silicone Check Valve
MPV-2B-PCS	1/8 Barb Polycarbonate / Natural FDA Silicone Check Valve
MPV-3B-PCS	3/16 Barb Polycarbonate / Silicone .020 VI Check Valve
MPV-4B-KS	1/4 Barb Standard PVDF/ Silicone Check Valve
MPV-6B-KS	3/8 Barb PVDF / USP Class VI Silicone Check Valve
MPV-6B-PCRS	3/8 Barb Polycarbonate / Silicone USP class VI Check Valve



GREY POLYPROPYLENE MALE THREAD PLUG

Our polypropylene fittings are made from a medical grade, gamma serializable polypropylene offering a greater chemical resistance. These couplings are available in both grey polypropylene and almond-colored polypropylene.

NON-VALVED	VALVED	THREAD SIZE	L(nv/v)	WIDTH	HEIGHT
20PPX-PE1-02	20PPV-PE1-02	1/8" NPT	1.27"/1.39"	.50"	.50"
20PPX-PE1-02MALD	20PPV-PE1-02MALD	1/8" NPT	1.27"/1.39"	.50"	.50"
40PPX-PE1-04	40PPV-PE1-04	1/4" NPT	1.50"/1.65"	.63"	.63"
40PPX-PE1-04MALD	40PPV-PE1-04MALD	1/4" NPT	1.50"/1.65"	.63"	.63"
50PPX-PE1-04	50PPV-PE1-04	1/4" NPT	1.60"/1.75"	.63"	.63"
50PPX-PE1-06	50PPV-PE1-06	3/8" NPT	1.60"/1.75"	.75"	.75"



**50AC-S3 PANEL MOUNT HOSE BARB
SOCKET, PLASTIC RELEASE LATCH**

This series of plastic-latch Quick Couplers has a 1/4" nominal flow. They are made of White Acetal with a plastic thumb latch coupler and a Buna O-ring insert standard. Temp ranges are -40° F to 180°F for Acetal.

NON-VALVED	VALVED	TUBE SIZE	METRIC TUBE	LENGTH	WIDTH	HEIGHT
50AC-S3-04	50ACV-SB3-04	1/4" ID	6.4" MM ID	2.10"	.90"	1.05"
50AC-S3-05	50ACV-SB3-05	5/16" ID	7.9" MM ID	2.10"	.90"	1.05"
50AC-S3-06	50ACV-SB3-06	3/8" ID	9.5" MM ID	2.10"	.90"	1.05"



50AC SERIES PCM ACETAL

1/4 Stem to 50 Series or PCM series for use with Acetal Quick Coupler.



50AC S1 MALE THREAD SOCKETS WITH PLASTIC RELEASE LATCH

Plastic-latch quick-couplers have a 1/4" nominal flow. They are made of acetal. These units are available in male pipe thread, Barb and ferrule-less polytube connectors (PFT), and push-in connectors. Coupler bodies and inserts are open flow as a standard, with optional shutoff units. O-rings are FDA/NSF Grade Buna Temperature range is -40° F to 180° F and the pressure rating is 120 psi. Available in Polypropylene.

NON-VALVED	VALVED	THREAD SIZE	LENGTH	WIDTH	HEIGHT
50AC-S1-04	50ACV-SB1-04	1/4 NPT	1.40	.75	.94
50AC-S1-06	50ACV-SB1-06	3/8 NPT	1.40	.75	.94



50AC PB1 SERIES - THREADED INSERT

50AC Quick Coupler Acetal Fitting Threaded Inserts, Two thread sizes available, 1/4 and 3/8 NPT. For use with the all 50 series female couplers.

Use with either liquid or gas—1/4" diameter flow path

- Acetal (POM) durable body, with FDA/NSF Buna O-rings for durability and compatibility
- Mix and match available to valved and non-valved coupler bodies to meet your flow path.
- Operating Pressure Vacuum to 120 PSI

NON VALVED	Valved	
50AC-PB1-04	50ACV-PB1-04	1/4 MNPT
50AC-PB1-06	50ACV-PB1-06	3/8 MNPT



40AC PB17 INLINE PUSH-IN PLUG

40 Series Insert for use with 1/4 OD tubing. Push-in connection of Acetal thermoplastic.

Available with or w/o valved shutoff.

The operating pressure is 120 psi with a temperature rating of -40° F to 180° F.

NON-VALVED	VALVED	TUBE SIZE	LENGTH	WIDTH	HEIGHT
40AC-PB17-04	40ACV-PB17-04	1/4" OD	1.81"/1.97"	.70"	.70"



40AC PB10 PTF

Acetal 1/4 Flow, 90-degree male insert with Brass Plated Compression Fitting for use with Plastic Tubing 1/4 OD and 3/8 OD.

Inserts available with or w/O valved shutoff. Compatible with all 40 series Couplers.

NON-VALVED	VALVED	TUBE SIZE	METRIC TUBE	L(nv/v)	WIDTH	HEIGHT
20AC-PB10-025	20ACV-PB10-025	5/32" OD, .10" ID	4.0 MM OD, 2.5 MM ID	1.09"/1.20"	.50"	.99"
20AC-PB10-04	20ACV-PB10-04	1/4 OD", .17" ID	6.4 MM OD, 4.3 MM ID	1.09"/1.20"	.50"	1.02"



20PP PE2 SERIES - GREY POLYPROPYLENE
IN-LINE HOSE BARB PLUG

It is made from medical-grade gamma sterilizable polypropylene, offering greater chemical resistance. This material has a temperature range of 32°F to 160°F and a max operating pressure of 120psi.

NON-VALVED	VALVED	TUBE SIZE	METRIC TUBE	L(nv/v)	WIDTH	LENGTH
20PP-PE2-01	20PPV-PE2-01	1/16" ID	1.6 MM ID	.80"/1.48"	.55"	.55"
20PP-PE2-01MALD	20PPV-PE2-01MALD	1/16" ID	1.6 MM ID	.80"/1.48"	.55"	.55"
20PP-PE2-02	20PPV-PE2-02	1/8" ID	3.2 MM ID	.97"/1.65"	.55"	.55"
20PP-PE2-02MALD	20PPV-PE2-02MALD	1/8" ID	3.2 MM ID	.97"/1.65"	.55"	.55"
20PP-PE2-04	20PPV-PE2-04	1/4" ID	6.4 MM ID	1.12"/1.80"	.55"	.55"
20PP-PE2-04MALD	20PPV-PE2-04MALD	1/4" ID	6.4 MM ID	1.12"/1.80"	.55"	.55"
40PP-PE2-04	40PPV-PE2-04	1/4" ID	6.4 MM ID	1.25"/1.94"	.70"	.70"
40PP-PE2-04MALD	40PPV-PE2-04MALD	1/4" ID	6.4 MM ID	1.25"/1.94"	.70"	.70"
40PP-PE2-06	40PPV-PE2-06	3/8" ID	9.5 MM ID	1.25"/1.83"	.70"	.70"
40PP-PE2-06MALD	40PPV-PE2-06MALD	3/8" ID	9.5 MM ID	1.25"/1.83"	.70"	.70"
50PPX-PE2-04	50PPV-PE2-04	1/4" ID	6.4 MM ID	1.89"/2.04"	.70"	.70"
50PPX-PE2-06	50PPV-PE2-06	3/8" ID	9.5 MM ID	1.76"/1.91"	.70"	.70"



20AC S4 ELBOW HOSE BARB SOCKET

1/8 flow Socket with 1/8 or 1/4 hose barbs

Natural Acetal (POM)

Available with or w/o shutoff.

NON VALVED	VAVLED	TUBE SIZE	METRIC TUBE	LENGTH	WIDTH	HEIGHT
20AC-S4-02	20ACV-SB4-02	1/8" ID	3.2 MM ID	1.3"	.63"	1.3"
20AC-S4-04	20ACV-SB4-04	1/4" ID	6.4 MM ID	1.3"	.63"	1.3"



20AC S1 SERIES - ACETAL MALE THREAD SOCKET

Quick Coupler Threaded NPT or BSPT. 1/8 Flow Female Socket with Stainless latch and spring.

NON-VALVED	VALVED	THREAD SIZE	LENGTH	WIDTH	LENGTH
20AC-S1-02	20ACV-SB1-02	1/8" NPT	1.00"	.62"	.80"
20AC-S1-02BSPT	20ACV-SB1-02BSPT	1/8" BSPT	1.00"	.62"	.80"
20AC-S1-04	20ACV-SB1-04	1/4" NPT	1.00"	.62"	.80"
20AC-S1-04BSPT	20ACV-SB1-04BSPT	1/4" BSPT	1.00"	.62"	.80"



20 SERIES GREY POLYPROPYLENE INLINE HOSE BARB SOCKET

Quick Coupler. Grey chemical-resistant Polypropylene, 1/8 Flow.



10AC S2 INLINE HOSE BARB SOCKET (NO SLEEVE)

1/16 Flow Acetal Insert for use with vacuum lines

FDA/NSF Buna O-ring

Sizes 1/16 and 1/18 Barb in Natural or Black Acetal

10AS-S2-01NS	1/16 Tube ID
10AC-S2-01NSBLK	1/16 Tube ID Black
10AC-S2-02NS	1/8 Tube ID
10AC-S2-02NSBLK	1/8 Tube ID Black

INDEX

1

10AC S2 Inline Hose Barb Socket (no sleeve) 10

2

20 Series Grey Polypropylene Inline Hose Barb Socket 9

20AC S1 Series - Acetal Male Thread Socket 9

20AC S4 Elbow Hose Barb Socket 8

20PP PE2 Series - Grey Polypropylene In-Line Hose Barb Plug 8

4

40AC PB10 PTF 7

40AC PB17 Inline Push-in Plug 7

5

50AC PB1 Series - Threaded Insert 6

50AC S1 Male Thread Sockets with Plastic Release Latch 6

50AC Series PCM Acetal 5

50AC-S3 Panel Mount Hose Barb Socket, Plastic Release Latch 5

G

Grey Polypropylene Male Thread Plug 4

M

MPV Series | Medical Grade Check Valves 4

MPV-L Series | Medical Grade Luer Check Valves 3

T

T-MB Series - Tee Fittings 3

TL Series - Plastic Thumb Latch 2

W

WPF Series | Plastic Inline Filters 1