

Metal



METAL

These products are crafted from pristine metal including stainless steel, bronze, and chrome-plated brass.


SBCV 2000 SERIES



Ball check valves are available in brass maximum operating pressure of 2000 PSI. 1/2 MNPT or 3/4 FNPT. 1/2 MNPT has seals of Buna/FKM/EPDM, and FKM only for 3/4 valves. Electroless nickel plating is available. Overall cracking pressure is between 1-5 PSI standard. 1/2 Male unit offered in less than 1, or more than 5 PSI. Both units are available without springs.

Par Number	Description	Seals	Opening pressure	Material
SPCV2000 8M8M-V-5	1/2 MNPT by 1/2 MNPT	Viton FKM	Over 5 PSI	Brass
SPCV2000 8M8M-E-1-NP	1/2 MNPT by 1/2 MNPT	EPDM	Less than 1 PSI	Brass Electroless Nickel plate
SPCV2000 8M8M-B-NS	1/2 MNPT by 1/2 MNPT	Buna	N/A	Brass
SPCV2000-12M12M-V-1 to 5	3/4 FNPT by 3/4 FNPT	Viton FKM	Opening between 1 to 5 PSI	Brass

CMPI SERIES - BRASS INDICATOR



CMPI Series is a single-pin 5/32" bore pressure indicator made of Brass. When the white pin is extended, the indicator is on. In addition, it is mountable on a maximum panel thickness of 3/16". The maximum input pressure is 150 psi and is recommended for air only. The mounting threads are 10-32 UNF and require a 1/4" NPT diameter mounting hole. Furthermore, the hex measures 5/16". The indicator is supplied with 2 panel mounting nuts. 40-micron filtration is recommended.

SKU	DESCRIPTION
CMPI-10-PM	10-32 Male Brass Panel Mount Pressure Indicator

CLPI SERIES - BRASS INDICATOR



CLPI-Series is a multi-pin pressure indicator made of Brass. The indicator pins come in 4 colors: green, white, red, and yellow. This indicator is supplied with a #15/32-32 nut and lock washer for mounting. This is a plunger type indicator and when the pins are extended the indicator is on. The panel mount threads are 10-32 UNF. The input pressure is 150 psi with the minimum actuation pressure of 15 psi. The maximum panel thickness is 3/16". A 40-micron filter is recommended. The indicator is for use with air only.

SKU	DESCRIPTION
CLPI-2-G	10-32 Female Green Pressure Indicator
CLPI-10-RD	10-32 Female Red Pressure Indicator

MPI SERIES - PRESSURE INDICATOR



Panel-mountable compact indicator light used to monitor the presence of air pressure. The light will be clear in the absence of pressure, it will be bright when activated by approximately 10 psi. The inlet port size is 1/8" NPT or 1/16" Barb. The body can be Electroless Nickel-Plated Brass or Aluminum alloy. The panel mount hole is 0.500" and the maximum panel thickness is 0.250". The panel mount threads are 15/32-32. Maximum operating pressure is 125 psi and the maximum temperature is 140° F. The display light is available in red or green and the panel mount bezel is available in black, white, or gray. It is supplied with one Electroless Nickel-Plated panel nut.

SKU
One Size Only

PITC SERIES - PRESSURE INDICATOR



Single pin 5/32" bore pressure indicator made of Brass. When the white pin is extended, the indicator is on. This is a direct mount with male threads of 10-32 UNF and requires a 1/8" NPT mounting hole. The maximum input pressure is 150 psi and is recommended for air only. The minimum actuation pressure is approximately 12 psi. The hex is 1/4". 40-micron filtration is recommended.

SKU	DESCRIPTION
PITC-10	10-32 Male Brass Pressure Indicator

OCPD SERIES- PINCH CLAMPS



OCPD Series are Double-eared pinch clamps that are suitable for securing both air and liquid lines. They are made of 304 Stainless Steel and offer a fast, simple, and secure installation. The 2-eared design gives an increased clamping range. They also come available in Zinc plated.

SKU	DESCRIPTION
OCPD-8	1/8" Double-Ear clamp Stainless Steel
OCPD-9	9/64" Double-Ear clamp Stainless Steel
OCPD-10	5/32" Double-Ear clamp Stainless Steel
OCPD-11	11/64" Double-Ear clamp Stainless Steel
OCPD-12	3/16" Double-Ear clamp Stainless Steel
OCPD-16	1/4" Double-Ear clamp Stainless Steel
OCPD-20	5/16" Double-Ear clamp Stainless Steel
OCPD-24	3/8" Double-Ear clamp Stainless Steel
OCPD-28	7/16" Double-Ear clamp Stainless Steel
OCPD-32	1/2" Double-Ear clamp Stainless Steel
OCPD-36	9/16" Double-Ear clamp Stainless Steel
OCPD-38	19/32" Double-Ear clamp Stainless Steel
OCPD-40	5/8" Double-Ear clamp Stainless Steel
OCPD-48	3/4" Double-Ear clamp Stainless Steel

SKU	DESCRIPTION
OCPD-52	13/16" Double-Ear clamp Stainless Steel
OCPD-56	7/8" Double-Ear clamp Stainless Steel
OCPD-60	15/16" Double-Ear clamp Stainless Steel

OCPS SERIES - PINCH CLAMPS



These single-eared 304 Stainless Steel Pinch Clamps can be used for securing tubing, hoses, electric cables, and welding hoses. The closed ear offers a fast, simple, and secure installation. When clamped, they provide a visual confirmation that the clamp is closed.

SKU	DESCRIPTION
OCPS-8	1/8" Single-Ear clamp Stainless Steel
OCPS-9	9/64" Single-Ear clamp Stainless Steel
OCPS-10	5/32" Single-Ear clamp Stainless Steel
OCPS-12	3/16" Single-Ear clamp Stainless Steel
OCPS-14	7/32" Single-Ear clamp Stainless Steel
OCPS-16	1/4" Single-Ear clamp Stainless Steel
OCPS-18	9/32" Single-Ear clamp Stainless Steel
OCPS-20	5/16" Single-Ear clamp Stainless Steel
OCPS-21	21/64" Single-Ear clamp Stainless Steel
OCPS-24	3/8" Single-Ear clamp Stainless Steel
OCPS-25	25/64" Single-Ear clamp Stainless Steel
OCPS-28	7/16" Single-Ear clamp Stainless Steel
OCPS-30	15/32" Single-Ear clamp Stainless Steel
OCPS-32	1/2" Single-Ear clamp Stainless Steel
OCPS-35	35/64" Single-Ear clamp Stainless Steel
OCPS-36	9/16" Single-Ear clamp Stainless Steel
OCPS-40	5/8" Single-Ear clamp Stainless Steel
OCPS-44	11/16" Single-Ear clamp Stainless Steel
OCPS-46	23/32" Single-Ear clamp Stainless Steel
OCPS-48	3/4" Single-Ear clamp Stainless Steel



DMAL SERIES - MANIFOLDS

DMAL Series has a rounded aluminum manifold that is ideal for air, water, and hydraulic fluid use. In addition, the temperature range of this manifold is -60° to 250°F. This manifold has an ideal maximum pressure of 300 psi.

SKU	DESCRIPTION
DMAL-1214	1/2" Female Inlet x Three 1/4" Female Outlet Aluminum Manifold
DMAL-1414	1/4" Female Inlet x Three 1/4" Female Outlet Aluminum Manifold
DMAL-3814	3/8" Female Inlet x Three 1/4" Female Outlet Aluminum Manifold



HBM SERIES - MANIFOLDS

The HBM Series is a Brass flat hex Manifold that is perfect for confined spaces. There is a single mounting hole. All measurements are female NPT threads.

SKU	DESCRIPTION
HBM-1414	1/4" Inlet x Three 1/4" Outlets Brass Manifold
HBM-3814	3/8" Inlet x Three 1/4" Outlets Brass Manifold
HBM-3838	3/8" Inlet x Three 3/8" Outlets Brass Manifold

PMM SERIES - MANIFOLDS



The PMM Series is a Black Anodized Aluminum Manifold that has a 1/4" or 3/8" female inlet port and 2 to 10 outlet ports of female NPT threads.

SKU	DESCRIPTION
PMM-4-10-2	1/4" FNPT by Ten 1/8" FNPT Anodized Aluminum Manifold
PMM-4-2-2	1/4" FNPT by Two 1/8" FNPT Anodized Aluminum Manifold
PMM-4-4-2	1/4" FNPT by Four 1/8" FNPT Anodized Aluminum Manifold
PMM-4-6-2	1/4" FNPT by Six 1/8" FNPT Anodized Aluminum Manifold
PMM-4-8-2	1/4" FNPT by Eight 1/8" FNPT Anodized Aluminum Manifold
PMM-6-10-2	3/8" FNPT by Ten 1/8" FNPT Anodized Aluminum Manifold
PMM-6-10-4	3/8" FNPT by Ten 1/4" FNPT Anodized Aluminum Manifold
PMM-6-2-4	3/8" FNPT by Two 1/4" FNPT Anodized Aluminum Manifold
PMM-6-4-2	3/8" FNPT by Four 1/8" FNPT Anodized Aluminum Manifold
PMM-6-4-4	3/8" FNPT by Four 1/4" FNPT Anodized Aluminum Manifold
PMM-6-6-2	3/8" FNPT by Six 1/8" FNPT Anodized Aluminum Manifold
PMM-6-6-4	3/8" FNPT by Six 1/4" FNPT Anodized Aluminum Manifold
PMM-6-8-2	3/8" FNPT by Eight 1/8" FNPT Anodized Aluminum Manifold

CMM SERIES



The CMM Series is a black Anodized Aluminum Manifold that has a 1/8" female inlet port and 3 outlet ports of either 1/8" female NPT threads or 10-32 female UNF threads. All ports are on one side of the manifold.

SKU	DESCRIPTION
CMM-2F-3-1032	1/8" Inlet by Three 10-32 Outlet Ports Anodized Aluminum Manifold
CMM-2F-3-2F	1/8" Inlet by Three 1/8" Outlet Ports Anodized Aluminum Manifold
CMM-2F-4-1032	1/8" Inlet by Four 10-32 Outlet Ports Anodized Aluminum Manifold
CMM-2F-4-2F	1/8" Inlet by Four 1/8" Outlet Ports Anodized Aluminum Manifold
CMM-2F-5-1032	1/8" Inlet by Five 10-32 Outlet Ports Anodized Aluminum Manifold

MAN SERIES



This manifold comes in a variety of metals and plastics and is available in 2, 4, 6, 8, and 10 outlet ports. Equal inlet and outlet on the ends of the manifold with a Step-down size port for the side outlets.

SKU	DESCRIPTION
MAN5-12-AL	Aluminum 1/2" Inlet by Five 3/8" Outlet Manifold
MAN6-38-P	Polypropylene 1/2" Inlet by Six 3/8" Outlet Manifold
MAN8-12-AL	Aluminum 1/2" Inlet by Eight 3/8" Outlet Manifold
MAN8-38-ACN	Natural Acetal 1/2" by Eight 3/8" Outlet Manifold
MAN8-38-AL	Aluminum 3/8" Inlet by Eight 1/2" Outlet Manifold
MAN8-38-P	Natural Polypropylene 1/2" Inlet by Eight 3/8" Outlet Manifold

MBBV 3 SERIES



MBBV Series is a forged 3-way ball valve that offers flow options in both directions as well as allowing unimpeded flow when the handle is placed at a 45° angle. In addition, the temperature rating for this valve is 0-230°F. Also, the pressure rating of this ball valve is 600 WOG.

- Full Port
- Blow-Out Proof System
- Double O-Ring Stem Packing
- PTFE Seal
- Not Lead Free

SKU	Description
MBBV-8F	1/2 inch Female Full Port Brass 600 psi WOG Ball Valve
MBBV-4F	1/4 inch Female Brass Ball Valve 600 psi Ball Valve

SKU	Description
MBBV-6F	3/8 inch Female Brass Ball Valve 600 psi Ball Valve
MBBV-12F	3/4 inch Female Brass Ball Valve 600 psi Ball Valve
MBBV-16F	1 inch Female Brass Ball Valve 600 psi Ball Valve
MBBV-20F	1-1/4 inch Female Brass Ball Valve 600 psi Ball Valve
MBBV-24F	1-1/2 inch Female Brass Ball Valve 600 psi Ball Valve
MBBV-32F	2 inch Female Brass Ball Valve 600 psi Ball Valve
MBBV-40F	2-1/2 inch Female Brass Ball Valve 600 psi Ball Valve
MBBV-48F	3 inch Female Brass Ball Valve 600 psi Ball Valve
MBBV-64F	4 inch Female Brass Ball Valve 600 psi Ball Valve

KT SERIES



The KT Series is a flexible PVDF tubing suitable for use with flare and compression fittings. This tubing is resistant to many commonly used industrial fluids and gasses, including ozone, and does not support the growth of fungi and bacteria. In addition, PVDF material is UV-resistant and FDA-compliant. It can be used with water disinfection involving ozone, aquariums, spas, and pools and is also recommended for agriculture, food, beverage, and water purification applications. Furthermore, we offer several standard sizes as well as custom sizes upon request.


Applications

- Metal Preparation
- Food & Beverage
- Petrochemical Processing
- High Purity Semiconductor
- Water Purification
- Chemical Process
- Nuclear Waste
- Ultra-Pure Water Process Systems
- Pulp & Paper
- Aquarium
- Pool & Spa

SKU	DESCRIPTION
KT-11618	1/16 ID 1/8 OD PVDF Tubing
KT-1438	1/4 ID 3/8 OD PVDF Tubing
KT-1714	.170 ID 1/4 OD PVDF Tubing
KT-1814	1/8 ID 1/4 OD PVDF Tubing
KT-31614	3/16 ID 1/4 OD PVDF Tubing

SKU	DESCRIPTION
KT-316516	3/16 ID 5/16 OD PVDF Tubing
KT-3812	3/8 ID 1/2 OD PVDF Tubing
KT-51638	5/16 ID 3/8 OD PVDF Tubing
KT-516716	5/16 ID 7/16 OD PVDF Tubing
KT-18316	1/8 ID 3/16 OD PVDF Tubing
KT-17014	.170 ID 1/4 OD PVDF Tubing
KT-71612	7/16 ID 1/2 OD PVDF Tubing
KT-1258	1/2 ID 5/8 OD PVDF Tubing
KT-5834	5/8 ID 3/4 OD PVDF Tubing
KT-3478	3/4 ID 7/8 OD PVDF Tubing
KT-781	7/8 ID 1 inch OD PVDF Tubing
KT-53214	5/32 ID 1/4 OD PVDF Tubing
KT-46M	4mm ID 6 mm OD PVDF Tubing
KT-68M	6 mm ID 8 mm OD PVDF Tubing
KT-68M	6 mm ID 8 mm OD PVDF Tubing
KT-810M	8 mm ID 10 mm OD PVDF Tubing

BOE SERIES



BOE Series features a high-quality Brass 1/8 NPT Adapter, specifically designed for reliable performance in various applications. The model BOE-2M has a precise length of 15/16 inches, ensuring a secure and efficient connection. This adapter is crafted from durable brass, providing excellent resistance to corrosion and wear, making it ideal for both residential and industrial use.

AMO SERIES



AMO Series are Brass or 303 Stainless Steel adapter orifices available with 10-32 UNF, 1/8", 1/4", 3/8", or 1/2" National Pipe Threads. Also, orifice sizes are .004-.125 MM, Stainless are .004-.125 MM. Used for Air, Water Gas applications up to 100 PSI. Furthermore, they are used for Speed control for cylinders and actuators. Orifices are Bi-directional flow with predictable flow rates.

SHN SERIES



This product features a robust housing made from either high-quality brass or 303 stainless steels, ensuring durability and resistance to corrosion. It incorporates a synthetic sapphire orifice, which is encased in a nylon sleeve for added protection and longevity. The male NPT threads are precisely machined to a 1/8-inch size, providing a secure and reliable connection. Additionally, this product is available with an optional filter, enhancing its versatility and functionality for various applications.

TBB SERIES



TBB Series is a high-quality brass tube-to-tube connector with a sapphire orifice, designed for durability and reliability in various applications. This connector features a precision-engineered sapphire orifice, which ensures optimal flow control and resistance to wear. The connector is equipped with 1/16-inch barbs, providing a secure and leak-free connection for tubing. Its robust construction and superior materials make it an excellent choice for both laboratory and industrial use.

QCSPM SERIES



QCSPM Series is a 316 Stainless Steel Bulkhead coupler with a Compression to Push-to-connect Stem. It is available with 1/4" or 3/8" connections. In addition, the temperature ranges from 0° F to 150° F. The maximum working pressure is 150 psi. Therefore, this coupler works well with polyethylene, Nylon, polypropylene, or vinyl tubing. Brass sleeves are available for use with soft metal tubing. The nuts will tighten around the sleeve to prevent twisting of the plastic tubing. In other words, it can be used with dental equipment, pneumatic systems, coolant, and water lines.

SKU	DESCRIPTION
QC-4S-PM-4-SS	SS 1/4" OD Tubing x 1/4" OD Tubing Non-Valved
QC-4S-PM-4-NPB	NP Brass 1/4" O.D Tubing x 1/4" OD Tubing Non-Valved
QC-6S-PM-6-SS	SS 3/8" OD Tubing x 3/8" OD Tubing
QC-6S-PM-6-NPB	SS 3/8" OD Tubing x 3/8" OD Tubing Non-Valved



QCS SERIES

QCS Series has a 316 Stainless Steel Coupler body with a Male NPT threaded connection to a Push-to-Connect stem. Also, the OD sizes are 1/4" and 3/8" and the male threads sizes are 1/8" and 1/4". The temperature range is from 0° F to 150° F. The maximum working pressure is 150 psi. Furthermore, the coupler works well with Polyethylene, Nylon, Polypropylene, or Vinyl Tubing. This coupler is also available in chrome-plated brass.

SKU	DESCRIPTION
QCS-4S-2M-SS	SS 1/4" NPT To 1/8" OD Tubing Socket
QCS-4S-2M-NPB	NP Brass 1/4" NPT To 1/8" OD Tubing Socket
QCS-4S-4M-SS	SS 1/4" NPT To 1/4" OD Tubing Socket Valved
QCS-4S-4M-NPB	NP Brass 1/4" NPT To 1/4" OD Tubing Socket
QCS-6S-6M-SS	SS 3/8" NPT To 1/4" OD Tubing Socket
QCS-6S-6M-NPB	NP Brass 3/8" NPT To 1/4" OD Tubing Socket



QCPN SERIES

QCPN Series is a 316 Stainless Steel Non-Valved through-type Coupler with a Compression connection to a Plug-in Stem. The OD sizes are 1/4" and 3/8". The temperature range is 0° F to 150° F. In fact, the maximum working pressure is 150 psi. This coupler works well with Polyethylene, Nylon, Polypropylene, or Vinyl tubing. This coupler is also available in Chrome-Plated Brass. Also the nuts will rotate around the sleeve to prevent twisting the plastic tubing.

SKU	DESCRIPTION
QCPN-4S-O-4-SS	SS 1/4" OD Tubing x 1/4" OD Tubing Open /Non-Valved
QCPN-4S-O-4-NPB	NP Brass 1/4" OD Tubing x 1/4" OD Open/Tubing Non-Valved
QCPN-6S-O-6-SS	SS 3/8" O.D Tubing x 3/8" OD Tubing Open/Non-Valved
QCPN-6S-O-6-NPB	NP Brass 3/8" OD Tubing x 3/8" OD Open/Tubing Non-Valved



QCPV SERIES

QCPV Series is a 316 Stainless Valve Steel Shut-off Coupler with a Compression connection to a Plug-in Stem. The OD sizes are 1/4" and 3/8". The temperature range is 0° F to 150° F. In fact, the maximum working pressure is 150psi. Also, this Coupler works well with Polyethylene, Nylon, Polypropylene, or Vinyl Tubing. This coupler is also available in Chrome-Plated Brass. The nuts will rotate around the sleeve to prevent twisting the plastic tubing.

SKU	DESCRIPTION
QC-4SV-4-SS	SS 1/4" O.D Tubing x 1/4" OD Tubing Valved
QC-4SV-4-NPB	NP Brass 1/4" OD Tubing x 1/4" OD Tubing Valved
QC-6SV-6-SS	SS 3/8" O.D Tubing x 3/8" O.D Tubing Valved
QC-6SV-6-NPB	NP Brass 3/8" O.D Tubing x 3/8" O.D Tubing Valved

SCMS SERIES



SCMS Series is a miniature Hose Clamp that is 5/16" wide and made of 301 Stainless Steel. It has a 1/4" hex-slotted 410 Stainless Steel screw. Also it can be used for agricultural, industrial, and automotive applications. The diameter range is 5/8" to 1-3/4".


SKU	DESCRIPTION
SCM5-1	7/16 to 5/8 Stainless Clamp
SCM5-1116	7/16 to 11/16 Stainless Clamp
SCM5-1-116	1/2 to 1-1/16 Stainless Clamp
SCM5-1-12	11/16 to 1-1/12 Stainless Clamp
SCM5-1-14	9/16 to 1-1/4 Stainless Clamp
SCM5-1-34	7/8 to 1-3/4 Stainless Clamp
SCM5-58	7/32 to 5/8 Stainless Steel Clamp
SCM5-78	7/16 to 7/8 Stainless Clamp

HCSS SERIES



HCSS Series is a Bar stock Hex Socket Plug made of 304 or 316 Stainless Steel. It can be used with air, water, oil, natural gas or steam. Also, the maximum pressure is 300 psi at 72° F or 150 psi at 366 ° F for steam.

SKU	DESCRIPTION
HCSS-1M	1/16 MNPT Socket Plug
HCSS-2M	1/8 MNPT Socket Plug
HCSS-4M	1/4 MNPT Socket Plug
HCSS-6M	3/8 MNPT Socket Plug
HCSS-8M	1/2 MNPT Socket Plug



GSBV SERIES


The GSBV Series is a One-way Brass garden hose Ball Valve.



20CB SERIES - FEMALE THREAD PLUG

Female Chrome Plated Brass Thread Plug

NON-VALVED	VALVED	THREAD SIZE	L(nv/v)	WIDTH	HEIGHT
20CB-PB13-1032	20CBV-PB13-1032	10/32" UNF	.63" / 1.35"	.56"	.56"
20CB-PB13-02	NA	1/8" NPT	.95" / N/A	.56"	.56"
20CB-PB13-02BSPT	NA	1/8" BSPT	.95" / N/A	.56"	.56"
20CB-PB13-04	NA	1/4" NPT	1.15" / N/A	.63"	.63"
40CB-PB13-04	40CBV-PB13-04	1/4" NPT	1.25" / 1.90"	.63"	.63"

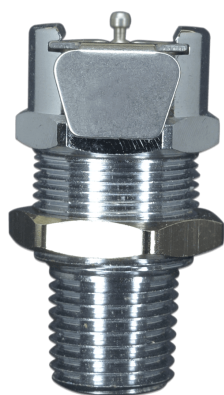

20CB S12 SERIES

20CB S12 Series are Couplings made of food-grade chrome-plated brass for food industry applications. In addition, the maximum pressure for these couplings is 250psi with a max temperature rating of 180°F.

NON-VALVED	VALVED	THREAD SIZE	LENGTH	WIDTH	HEIGHT
20CB-S12-02	20CBV-SB12-02	1/8" NPT	.62"	.80"	.80"



CBMTP SERIES

Pneuline Supply offers food-grade chrome-plated brass male plugs for use in many different industries. Offering a heat resistance of 180 °F these quick couplers are built to last a while with a robust construction.

NON-VALVED	VALVED	THREAD SIZE	L(nv/v)	WIDTH	HEIGHT
20CB-PB1-02	20CBV-PB1-02	1/8" NPT	1.05"/1.45"	.50"	.50"
20CB-PB1-02BSPT	20CBV-PB1-02BSPT	1/8" BSPT	1.05"/1.45"	.50"	.50"
20CB-PB1-04	20CBV-PB1-04	1/4" NPT	1.05"/1.45"	.50"	.50"
20CB-PB1-04BSPT	20CBV-PB1-04BSPT	1/4" BSPT	1.05"/1.45"	.50"	.50"
40CB-PB1-04	40CBV-PB1-04	1/4" NPT	1.25"/1.55"	.63"	.63"
40CB-PB1-04BSPT	40CBV-PB1-04BSPT	1/4" BSPT	1.25"/1.55"	.63"	.63"
40CB-PB1-06	40CBV-PB1-06	3/8" NPT	1.25"/1.55"	.75"	.75"
40CB-PB1-06BSPT	40CBV-PB1-06BSPT	3/8" BSPT	1.25"/1.55"	.75"	.75"



CBIH SERIES

Pneuline offers food-grade chrome-plated quick connect plugs for a wide array of industrial applications as well as food industry applications. These quick connects operate at 250psi and are rated for temperatures up to 180 °F.

NON-VALVED	VAIVED	TUBE SIZE	METRIC TUBE	L(nv/v)	WIDTH	HEIGHT
20CB-PB2-02	20CBV-PB2-02	1/8" ID	3.2 MM ID	.98"/1.65"	.63"	.63"
20CB-PB2-03	20CBV-PB2-03	3/16" ID	4.8 MM ID	1.13"/1.80"	.63"	.63"
20CB-PB2-04	20CBV-PB2-04	1/4" ID	6.4 MM ID	1.13"/1.85"	.63"	.63"
40CB-PB2-04	40CBV-PB2-04	1/4" ID	6.4 MM ID	1.30"/1.85"	.63"	.63"
40CB-PB2-05	40CBV-PB2-05	5/16" ID	7.9 MM ID	1.30"/1.85"	.63"	.63"
40CB-PB2-06	40CBV-PB2-06	3/8" ID	9.5 MM ID	1.30"/1.85"	.63"	.63"



CBMTS SERIES

Produced in food-grade chrome plated brass, these 1/8" flow size couplings are more durable and withstand higher pressures. They are available with internal shutoff valves or straight-through.

NON-VALVED	VALVED	THREAD SIZE	LENGTH	WIDTH	HEIGHT
20CB-S1-02	20CBV-SB1-02	1/8" NPT	1.00"	.62"	.80"
20CB-S1-02BSPT	20CBV-SB1-02BSPT	1/8" BSPT	1.00"	.62"	.80"
20CB-S1-04	20CBV-SB1-04	1/4" NPT	1.00"	.62"	.80"
20CB-S1-04BSPT	20CBV-SB1-04BSPT	1/4" BSPT	1.00"	.62"	.80"
40CB-S1-04	40CB-SB1-04	1/4" NPT	1.15"	.86"	.90"
40CB-S1-04BSPT	40CB-SB1-04BSPT	1/4" BSPT	1.15"	.86"	.90"
40CB-S1-06	40CB-SB1-06	3/8" NPT	1.15"	.86"	.90"
40CB-S1-06BSPT	40CB-SB1-06BSPT	3/8" BSPT	1.15"	.86"	.90"

LS-T & LS-TR SERIES



LS-T & LS-TR Series is a 316 Stainless Steel Tee connector with equal and reducing barbs.

SKU	DESCRIPTION
LS-T-532B	5/32 Barb Tee 316 Stainless Steel
LS-T-3B	3/16 Barb Tee 316 Stainless Steel
LS-T-4B	1/4 Barb Tee 316 Stainless Steel
LS-T-5B	5/16 Barb Tee 316 Stainless Steel
LS-T-6B	3/8 Barb Tee 316 Stainless Steel
LS-T-8B	1/2 Barb Tee 316 Stainless Steel
LS-T-10B	5/8 Barb Tee 316 Stainless Steel
LS-T-12B	3/4 Barb Tee 316 Stainless Steel
LS-TR-6B5B	3/8 Barb by 5/16 Barb Reducing Tee 316 Stainless Steel
LS-TR-8B5B	1/2 Barb by 5/16 Barb Reducing Tee 316 Stainless Steel
LS-TR-10B5B	5/8 Barb by 5/16 Barb Reducing Tee 316 Stainless Steel



MSSB SERIES

MSSB Series bulkhead range from 10-32 to 1/2 FNPT product selection is 303 Stainless Steel, 316 Stainless Steel, Aluminum, or Nickel Plated Brass. Can be used as a bushing as the external threads are UNF bolt threads. lock-nut and star-washer are included.

SKU	DESCRIPTION
MSSB-1032-303	10-32 UNF 303 Stainless Steel Bulkhead
MSSB-2F-303	1/8-27 FNPT 303 Stainless Steel Bulkhead
MSSB-4F-303	1/4-18 FNPT 303 Stainless Steel Bulkhead
MSSB-6F-303	3/8-24 FNPT 303 Stainless Steel Bulkhead
MSSB-8F-303	1/2-14 FNPT 303 Stainless Steel Bulkhead
MSSB-2F-316	1/8-27 FNPT 316 Stainless Steel Bulkhead
MSSB-4F-316	1/4-18 FNPT 316 Stainless Steel Bulkhead
MSSB-6F-316	3/8-24 FNPT 316 Stainless Steel Bulkhead
MSSB-8F-316	1/2-14 FNPT 316 Stainless Steel Bulkhead



PPBN SERIES

The PPBN Series is an Electroless Nickel-plated Brass push-button Relief Valve that is corrosion-resistant. The operating pressure is 0 to 125 psi. Releases pressurized air at a rate of 100 in³ in 4 seconds. Available in NPT or UNF threads.

SKU	DESCRIPTION
PPBN-1032	10-32 Push Button Bleed Valve
PPBN-2M	1/8 NPT Push Button Bleed Valve
PPBN-4M	1/4 NPT Push Button Bleed Valve



TBVA SERIES

TBVA Series is a Brass Relief Valve with 1/8" male NPT threads and side exhaust. Maximum working pressure of 150psi.



NBR SERIES

The 2-way non-exhausting Air Regulator is made of Electroless Nickel Plated Brass with a small knurled knob and is panel mountable. The input port can be 10-32 male or female threads; 1/16", 3/32", and 1/8" Barb; 1/8" Female NPT or 1/4-20 Female threads. Also, the outlet port can be 10-32 male or female threads or 1/16", 3/32", or 1/8" Barb. The panel mount threads are 15/32-32. The maximum operating pressure is 5 to 80 psi and the maximum operating temperature is 180° F. 3-way exhausting is also available.



NAC SERIES -THREADED CONNECTOR

The nickel-plated brass fitting is user-friendly and ensures a secure lock when installed. The smooth stem facilitates easy tubing attachment. The opposite end features male threads and a fixed nut for tightening. The fitting has a working pressure of 217 psi and a temperature range of 4°F to 160°F.



TCM SERIES

TCM Series are Straight Connectors made of 316 Stainless Steel. One end is smooth for easy attachment of tubing and the other has male threads below a hex nut for tightening. Also, it has a working pressure of 290 psi and a temperature range of -4° F to 302° F. The sterilization temperature is up to 280° F. The O-Ring is Viton®. BSPT is also available.

SKU	DESCRIPTION
TCM-10-532P-SS	10-32 UNF Male by 5/32 OD 316 Stainless Steel Push-to-Connect
TCM-2M-14P-SS	1/8 MNPT by 1/4 OD 316 Stainless Steel Push-to-Connect
TCM-2M-316P-SS	1/8 MNPT by 3/16 OD 316 Stainless Steel Push-to-Connect
TCM-2M-516P-SS	1/8 MNPT by 5/16 OD 316 Stainless Steel Push-to-Connect
TCM-2M-532P-SS	1/8 MNPT by 5/32 OD 316 Stainless Steel Push-to-Connect
TCM-4M-316P-SS	1/4 MNPT by 3/16 OD 316 Stainless Steel Push-to-Connect
TCM-4M-4P-SS	1/4 MNPT by 1/4 OD 316 Stainless Steel Push-to-Connect
TCM-4M-5P-SS	1/4 MNPT by 5/16 OD 316 Stainless Steel Push-to-Connect
TCM-4M-6P-SS	1/4 MNPT by 3/8 OD 316 Stainless Steel Push-to-Connect
TCM-4M-8P-SS	1/4 MNPT by 1/2 OD 316 Stainless Steel Push-to-Connect
TCM-6M-6P-SS	3/8 MNPT by 3/8 OD 316 Stainless Steel Push-to-Connect
TCM-6M-8P-SS	3/8 MNPT by 1/2 OD 316 Stainless Steel Push-to-Connect
TCM-8M-6P-SS	1/2 MNPT by 3/8 OD 316 Stainless Steel Push-to-Connect
TCM-8M-8P-SS	1/2 MNPT by 1/2 OD 316 Stainless Steel Push-to-Connect



PAM SERIES - PUSH-TO-CONNECT

The PAM Series is a push-to-connect fitting that is a compact size with a straight male hex configuration. In addition, the working pressure is 150 psi, and the temperature range is 32°F to 140°F. Nickel-plated Brass, the Buna-N O-ring, and the grip ring are Stainless Steel. Furthermore, this product is intended for use with compressed air and inert.

SKU	DESCRIPTION
PAM-10U14P	10-32 Male UNF by 1/4 OD Push-to-Connect
PAM-10U14PC	10-32 Male UNF by 1/4 OD Push-to-Connect
PAM-10U18P	10-32 Male UNF by 1/8 OD Push-to-Connect
PAM-10U316P	10-32 Male UNF by 3/16 OD Push-to-Connect
PAM-10U532P	10-32 Male UNF by 5/32 OD Push-to-Connect
PAM-10U532PC	10-32 Male UNF by 5/32 OD Push-to-Connect
PAM-1M18P	1/16 MNPT by 1/8 OD Push-to-Connect
PAM-1M532P	1/16 MNPT by 5/32 OD Push-to-Connect
PAM-1M14P	1/16 MNPT by 1/4 OD Push-to-Connect
PAM-2M2P	1/8 MNPT by 1/8 OD Push-to-Connect
PAM-2M316P	1/8 MNPT by 3/16 OD Push-to-Connect
PAM-2M14P	1/8 MNPT by 1/4 OD Push-to-Connect
PAM-2M4P	1/8 MNPT by 1/4 OD Push-to-Connect
PAM-2M516P	1/8 MNPT by 5/16 OD Push-to-Connect
PAM-2M532P	1/8 MNPT by 5/32 OD Push-to-Connect
PAM-2M532PC	1/8 MNPT by 5/32 OD Push-to-Connect
PAM-2M38P	1/8 MNPT by 3/8 OD Push-to-Connect
PAM-2M12P	1/8 MNPT by 1/2 OD Push-to-Connect
PAM-4M18P	1/4 MNPT by 1/8 OD Push-to-Connect
PAM-4M316P	1/4 MNPT by 3/16 OD Push-to-Connect
PAM-4M14	1/4 MNPT by 1/4 OD Push-to-Connect
PAM-4M532P	1/4 MNPT by 5/32 OD Push-to-Connect 4 MM
PAM-4M3P	1/4 MNPT by 3/16 OD Push-to-Connect
PAM-4M4P	1/4 MNPT by 1/4 OD Push-to-Connect
PAM-4M516P	1/4 MNPT by 5/16 OD Push-to-Connect
PAM-4M38P	1/4 MNPT by 3/8 OD Push-to-Connect
PAM-4M6P	1/4 MNPT by 3/8 OD Push-to-Connect
PAM-4M8P	1/4 MNPT by 1/2 OD Push-to-Connect
PAM-4R-8MMP	1/4 R by 8 mm OD Push-to-Connect

SKU	DESCRIPTION
PAM-5M14P	5 mm by 1/4 OD Push-to-Connect
PAM-6M532P	3/8 MNPT by 5/32 OD Push-to-Connect
PAM-6M316P	3/8 MNPT by 3/16 OD Push-to-Connect
PAM-6M3P	3/8 MNPT by 3/16 OD Push-to-Connect
PAM-6M516	3/8 MNPT by 5/16 OD Push-to-Connect
PAM-6M38	3/8 MNPT by 3/8 OD Push-to-Connect
PAM-6M4P	3/8 MNPT by 1/4 OD Push-to-Connect
PAM-6M8P	3/8 MNPT by 1/2 OD Push-to-Connect
PAM-6M12	3/8 MNPT by 1/2 OD Push-to-Connect
PAM-8M38	1/2 MNPT by 3/8 OD Push-to-Connect
PAM-8M6P	1/2 MNPT by 3/8 OD Push-to-Connect
PAM-8M8	1/2 MNPT by 1/2 OD Push-to-Connect
PAM-8M12	1/2 MNPT by 1/2 OD Push-to-Connect
PAM-8R-8MMP	1/2 R by 8 MM OD Push-to-Connect



AC SERIES

Ac Series connectors are Brass with male or female threads on one end with a nut for tightening. The other end is smooth for ease of attaching tubing. In addition, they will connect to any 10-32 threaded inlet. The OD tube sizes are 5/32", 1/4", and 3/8".

SKU	
AC-10F-14S	10-32 Female UNF by 1/4 Stem Brass
AC-10F-38S	10-32 Female UNF by 3/8 Stem Brass
AC-10F-532S	10-32 Female UNF by 5/32 Stem Brass
AC-10U-14S	10-32 Male UNF by 1/4 Stem Brass
AC-10U-38S	10-32 Male UNF by 3/8 Stem Brass
AC-10U-532	10-32 Male UNF by 5/32 Stem Brass



PEMR SERIES

The PEMR Series is a Tee Push-to-Connect with a Metal Hex, see available options below.

SKU	DESCRIPTION
PEMR-10U18P	10-32 Male UNF by 1/8 OD PBT Male Run Tee
PEMR-10U316P	10-32 Male UNF by 3/16 OD PBT Male Run Tee
PEMR-10U14P	10-32 Male UNF by 1/4 OD PBT Male Run Tee
PEMR-10U532P	10-32 Male UNF by 5/32 OD PBT Male Run Tee
PEMR-1M18P	1/16 MNPT by 1/8 OD PBT Male Run Tee
PEMR-1M14P	1/16 MNPT by 1/4 OD PBT Male Run Tee
PEMR-1M532P	1/16 MNPT by 5/32 OD PBT Male Run Tee
PEMR-2M18P	1/8 MNPT by 1/8 OD PBT Male Run Tee
PEMR-2M316P	1/8 MNPT by 3/16 OD PBT Male Run Tee
PEMR-2M14P	1/8 MNPT by 1/4 OD PBT Male Run Tee
PEMR-2M532P	1/8 MNPT by 5/32 OD PBT Male Run Tee
PEMR-2M5P	1/8 MNPT by 5/16 OD PBT Male Run Tee
PEMR-2M38P	1/8 MNPT by 3/8 OD PBT Male Run Tee
PEMR-2M12P	1/8 MNPT by 1/2 OD PBT Male Run Tee
PEMR-4M18P	1/4 MNPT by 1/8 OD PBT Male Run Tee
PEMR-4M316P	1/4 MNPT by 3/16 OD PBT Male Run Tee
PPEMR-4M516P	1/4 MNPT by 5/16 OD PBT Male Run Tee
PEMR-4M532P	1/4 MNPT by 5/32 OD PBT Male Run Tee
PEMR-4M14P	1/4 MNPT by 1/4 OD PBT Male Run Tee
PEMR-4M38P	1/4 MNPT by 3/8 OD PBT Male Run Tee
PEMR-4M8P	1/4 MNPT by 1/2 OD PBT Male Run Tee
PEMR-6M316P	3/8 MNPT by 3/16 OD PBT Male Run Tee
PEMR-6M14P	3/8 MNPT by 1/4 OD PBT Male Run Tee
PEMR-6M38P	3/8 MNPT by 3/8 OD PBT Male Run Tee
PEMR-6M12P	3/8 MNPT by 1/2 OD PBT Male Run Tee
PEMR-8M38P	1/2 MNPT by 3/8 OD PBT Male Run Tee
PEMR-8M12P	1/2 MNPT by 1/2 OD PBT Male Run Tee



PBFC BULKHEAD SERIES

Push-to-connect female Bulkhead Union fitting with female NPT and BSPT threads. It is made of nickel-plated brass with PBT resin. The working pressure is 150 psi and the temperature range is 32° F to 140° F. It can be used with compressed air and inert gases.

SKU	DESCRIPTION
PBFC-2F-14P	1/8 FNPT by 1/4 PBT Push-to-Connect Bulkhead
PBFC-2F-316P	1/8 FNPT by 3/16 PBT Push-to-Connect Bulkhead
PBFC-2F-516P	1/8 FNPT by 5/16 PBT Push-to-Connect Bulkhead
PBFC-2F-532P	1/8 FNPT by 5/32 PBT Push-to-Connect Bulkhead
PBFC-4F-14P	1/4 FNPT by 1/4 PBT Push-to-Connect Bulkhead
PBFC-4F-316P	1/4 FNPT by 3/16 PBT Push-to-Connect Bulkhead
PBFC-4F-38P	1/4 FNPT by 3/8 PBT Push-to-Connect Bulkhead
PBFC-4F-516P	1/4 FNPT by 5/16 PBT Push-to-Connect Bulkhead
PBFC-4G6MM-P	1/4 Female BSPT by 6mm PBT Push-to-Connect Bulkhead
PBFC-4G8MM-P	1/4 Female BSPT by 8mm PBT Push-to-Connect Bulkhead
PBFC-4R6MM-P	1/4 Female BSPT by 6mm PBT Push-to-Connect Bulkhead
PBFC-4R8MM-P	1/4 Female BSPT by 8mm PBT Push-to-Connect Bulkhead
PBFC-6F-516P	3/8 FNPT by 5/16 PBT Push-to-Connect Bulkhead
PBFC-6F-6P	3/8 FNPT by 3/8 PBT Push-to-Connect Bulkhead
PBFC-6F-8P	3/8 FNPT by 1/2 PBT Push-to-Connect Bulkhead
PBFC-6G6MM-P	3/8 Female BSPT by 6mm PBT Push-to-Connect Bulkhead



PEM45 SERIES- PUSH-TO-CONNECT

The PEM45 Series is a male push-to-connect fitting configured with a 45° elbow. The working pressure is 150 psi and the temperature range is 32° F to 140° F. Also, the metal body material is Nickel-plated Brass and the resin is PBT. This product is intended for use with compressed air and inert gases.

SKU	DESCRIPTION
PEM45-10U18P	PEM45 10-32 Male UNF by 1/8 OD PBT Elbow
PEM45-10U316P	PEM45 10-32 Male UNF by 3/16 OD PBT Elbow
PEM45-10U14P	PEM45 10-32 Male UNF by 1/4 OD PBT Elbow
PEM45-10U532P	PEM45 10-32 Male UNF by 5/32 OD PBT Elbow
PEM45-2M18P	PEM45 1/8 MNPT by 1/8 OD PBT Elbow
PEM45-2M316P	PEM45 1/8 MNPT by 3/16 OD PBT Elbow
PEM45-2M14P	PEM45 1/8 MNPT by 1/4 OD PBT Elbow
PEM45-2M516P	PEM45 1/8 MNPT by 5/16 OD PBT Elbow
PEM45-2M532P	PEM45 1/8 MNPT by 5/32 OD PBT Elbow
PEM45-2M38P	PEM45 1/8 MNPT by 3/8 OD PBT Elbow
PEM45-4M14P	PEM45 1/4 MNPT by 1/4 OD PBT Elbow
PEM45-4M516P	PEM45 1/4 MNPT by 5/16 OD PBT Elbow
PEM45-4M38P	PEM45 1/4 MNPT by 3/8 OD PBT Elbow
PEM45-4M12P	PEM45 1/4 MNPT by 1/2 OD PBT Elbow
PEM45-6M14P	PEM45 3/8 MNPT by 1/4 OD PBT Elbow
PEM45-6M516P	PEM45 3/8 MNPT by 5/16 OD PBT Elbow
PEM45-6M38P	PEM45 3/8 MNPT by 3/8 OD PBT Elbow
PEM45-6M12P	PEM45 3/8 MNPT by 1/2 OD PBT Elbow
PEM45-8M14P	PEM45 1/2 MNPT by 1/4 OD PBT Elbow
PEM45-8M38P	PEM45 1/2 MNPT by 3/8 OD PBT Elbow
PEM45-8M12P	PEM45 1/2 MNPT by 1/2 OD PBT Elbow



PEFC SERIES

The PEFC Series is a push-to-connect Swivel Female Elbow that is configured with a 90° body **with an external hex for tightening**. The working pressure is 150 psi and the temperature range is 32° F to 140° F. Metal body material is Nickel-Plated Brass and the resin is PBT. For use with compressed air and inert gases.

SKU	DESCRIPTION
PEFC-10U14P	10-32 Female UNF by 1/4 OD Push-to-Connect Elbow
PEFC-10U18P	10-32 Female UNF by 1/8 OD Push-to-Connect Elbow
PEFC-10U316P	10-32 Female UNF by 3/16 OD Push-to-Connect Elbow
PEFC-10U532P	10-32 Female UNF by 5/32 OD Push-to-Connect Elbow
PEFC-2F18P	1/8 FNPT by 1/8 OD Push-to-Connect Elbow
PEFC-2F316P	1/8 FNPT by 3/16 OD Push-to-Connect Elbow
PEFC-2F14P	1/8 FNPT by 1/4 OD Push-to-Connect Elbow
PEFC-2F38P	1/8 FNPT by 3/8 OD Push-to-Connect Elbow
PEFC-2F4P	1/8 FNPT by 1/4 OD Push-to-Connect Elbow
PEFC-2F516P	1/8 FNPT by 5/16 OD Push-to-Connect Elbow
PEFC-2F532P	1/8 FNPT by 5/32 OD Push-to-Connect Elbow
PEFC-4F18P	1/4 FNPT by 1/8 OD Push-to-Connect Elbow
PEFC-4F316P	1/4 FNPT by 3/16 OD Push-to-Connect Elbow
PEFC-4F14P	1/4 FNPT by 1/4 OD Push-to-Connect Elbow
PEFC-4F516P	1/4 FNPT by 5/16 OD Push-to-Connect Elbow
PEFC-4F532P	1/4 FNPT by 5/32 OD Push-to-Connect Elbow
PEFC-4F6P	1/4 FNPT by 3/8 OD Push-to-Connect Elbow
PEFC-4F8P	1/4 FNPT by 1/2 OD Push-to-Connect Elbow
PEFC-6F316P	3/8 FNPT by 3/16 OD Push-to-Connect Elbow
PEFC-6F14P	3/8 FNPT by 1/4 OD Push-to-Connect Elbow
PEFC-6F516P	3/8 FNPT by 5/16 OD Push-to-Connect Elbow
PEFC-6F38P	3/8 FNPT by 3/8 OD Push-to-Connect Elbow
PEFC-6F12P	3/8 FNPT by 1/2 OD Push-to-Connect Elbow
PEFC-8F38P	1/2 FNPT by 3/8 OD Push-to-Connect Elbow
PEFC-8F12P	1/2 FNPT by 1/2 OD Push-to-Connect Elbow



NSE & NST SERIES

The NSE & NST Series is a brass male thread to barb Swivel Elbows and Tees. Once tightened, they can swivel to the desired position. They have fiber gaskets. Threads available are NPT and UNF.



ME45 SERIES

The ME45 Series is a male thread-to-bite-style barb Brass 45° Elbow Adapter. *Order Example: ME45-2M532B*

MA SERIES - BITE-STYLE ADAPTER



Male NPT thread to Bite-Style barb Adapters in Brass and 303 Stainless. **The MA series are straight adapters** and **The ME series** are elbows.

BE & BER SERIES



The BE & BER Series is a 90° equal and reducing Brass Elbow connector with Bite-Style barbs. They are also available in 303 Stainless Steel.

MEU SERIES



The MEU Series is a thread to Bite-Style Barb Brass male Elbow Adapter. Also available in 303 Stainless Steel.

MAUM SERIES



UNF Threads to Bite-Style Barbs in Brass Available in 3-56 6-32 8-32 10-32 1/4-20 1/4-28 5/16-24 Metric sizes of: M3X.5 M5X.8 M6X1 M10X1 M8X1.25 Barb Sizes .045(364B) .062(1B) .078(78B) 3/32(332B) 1/8(2B) 5/32(532B) .170(170B) 3/16(3B) 7/32(732B) 1/4(4B) 5/16(5B) Furnished with fiber gasket. Also available with an O-ring (O) or captive gasket (CG). The standard O-ring is Buna. All units can be nickel-plated. 303 stainless is available. Orifices are available in all fitting combinations Order Example: MAU-12X1B

SQSTE SERIES



The SQSTE Series is a 303 Stainless Steel male NPT to female NPT 90° Elbow.

SKU	DESCRIPTION
SQSTE-1M1F	1/8 MNPT by 1/8 FNPT 90° Elbow
SQSTE-1M4F	1/8 MNPT by 1/4 FNPT 90° Elbow
SQSTE-4M1F	1/4 MNPT by 1/8 FNPT 90° Elbow
SQSTE-4M4F	1/4 MNPT by 1/4 FNPT 90° Elbow
SQSTE-6M4F	3/8 MNPT by 1/4 FNPT 90° Elbow
SQSTE-6M6F	3/8 MNPT by 3/8 FNPT 90° Elbow
SQSTE-8M6F	1/2 MNPT by 3/8 FNPT 90° Elbow
SQSTE-8M8F	1/2 MNPT by 1/2 FNPT 90° Elbow
SQSTE-12M12F	3/4 MNPT by 3/4 FNPT 90° Elbow

ESMM SERIES

Brass 90° Elbow Swivel connector with male-to-male NPT threads. The swivel allows full flow at any angle.

SKU	DESCRIPTION
ESMM-4	1/4 MNPT by 1/4 MNPT Brass Elbow Swivel

BHFS SERIES



The BHFS Series is a brass long-connect female Swivel adapter with NPT threads to hose barbs. The maximum working pressure is 150 psi at -40° F to 160° F. These barbs are intended to be used with hose clamps.

SKU	DESCRIPTION
BHFS-4F4B	1/4 FNPT by 1/4 Barb Brass Swivel
BHFS-4F6B	1/4 FNPT by 3/8 Barb Brass Swivel
BHFS-6F6B	3/8 FNPT by 3/8 Barb Brass Swivel
BHFS-6F8B	3/8 FNPT by 1/2 Barb Brass Swivel
BHFS-8F8B	1/2 FNPT by 1/2 Barb Brass Swivel

BHES SERIES

Brass male 90° Swivel Elbow with NPT threads to hose barbs. These barbs are intended to be used with hose clamps.

SKU	DESCRIPTION
BHES-2M4B	1/8 MNPT by 1/4 Barb 90° Swivel Elbow
BHES-2M6B	1/8 MNPT by 3/8 Barb 90° Swivel Elbow
BHES-4M4B	1/4 MNPT by 1/4 Barb 90° Swivel Elbow
BHES-4M6B	1/4 MNPT by 3/8 Barb 90° Swivel Elbow
BHES-4M8B	1/4 MNPT by 1/2 Barb 90° Swivel Elbow
BHES-6M6B	3/8 MNPT by 3/8 Barb 90° Swivel Elbow



RBSS SERIES

The RBSS Series is a 304 Stainless Steel Hex Bushing.

SKU	DESCRIPTION
RBSS-4M2F	1/4 MNPT by 1/8 FNPT Hex Bushing
RBSS-6M2F	3/8 MNPT by 1/8 FNPT Hex Bushing
RBSS-6M4F	3/8 MNPT by 1/4 FNPT Hex Bushing
RBSS-8M2F	1/2 MNPT by 1/8 FNPT Hex Bushing 304 only
RBSS-8M4F	1/2 MNPT by 1/4 FNPT Hex Bushing
RBSS-8M6F	1/2 MNPT by 3/8 FNPT Hex Bushing
RBSS-12M2F	3/4 MNPT by 1/8 FNPT Hex Bushing
RBSS-12M4F	3/4 MNPT by 1/4 FNPT Hex Bushing
RBSS-12M6F	3/4 MNPT by 3/8 FNPT Hex Bushing
RBSS-12M8F	3/4 MNPT by 1/2 FNPT Hex Bushing
RBSS-16M4F	1 inch MNPT by 1/4 FNPT Hex Bushing
RBSS-16M6F	1 inch MNPT by 3/8 FNPT Hex Bushing
RBSS-16M8F	1 inch MNPT by 1/2 FNPT Hex Bushing
RBSS-16M12F	1 inch MNPT by 3/4 FNPT Hex Bushing
RBSS-20M4F	1-1/4 inch MNPT by 1/4 FNPT Hex Bushing
RBSS-20M6F	1-1/4 inch MNPT by 3/8 FNPT Hex Bushing
RBSS-20M8F	1-1/4 inch MNPT by 1/2 FNPT Hex Bushing
RBSS-20M12F	1-1/4 inch MNPT by 3/4 FNPT Hex Bushing
RBSS-20M16F	1-1/4 inch MNPT by 1 FNPT Hex Bushing
RBSS-24M4F	1-1/2 inch MNPT by 1/4 FNPT Hex Bushing
RBSS-24M6F	1-1/2 inch MNPT by 3/8 FNPT Hex Bushing
RBSS-24M8F	1-1/2 inch MNPT by 1/2 FNPT Hex Bushing
RBSS-24M12F	1-1/2 inch MNPT by 3/4 FNPT Hex Bushing
RBSS-24M16F	1-1/2 inch MNPT by 1 inch FNPT Hex Bushing
RBSS-24M20F	1-1/2 inch MNPT by 1-1/4 inch FNPT Hex Bushing
RBSS-32M8F	2 inch MNPT by 1/2 FNPT Hex Bushing
RBSS-32M12F	2 inch MNPT by 3/4 FNPT Hex Bushing
RBSS-32M16F	2 inch MNPT by 1 inch FNPT Hex Bushing
RBSS-32M20F	2 inch MNPT by 1-1/4 inch FNPT Hex Bushing
RBSS-32M24F	2 inch MNPT by 1-1/2 inch FNPT Hex Bushing
RBSS-40M16F	2-1/2 inch MNPT by 1 inch FNPT Hex Bushing
RBSS-40M20F	2-1/2 inch MNPT by 1-1/4 inch FNPT Hex Bushing
RBSS-40M24F	2-1/2 inch MNPT by 1-1/2 inch FNPT Hex Bushing
RBSS-40M32F	2-1/2 inch MNPT by 2 inch FNPT Hex Bushing
RBSS-48M16F	3 inch MNPT by 1 inch FNPT Hex Bushing

SKU	DESCRIPTION
RBSS-48M20F	3 inch MNPT by 1-1/4 inch FNPT Hex Bushing
RBSS-48M24F	3 inch MNPT by 1-1/2 inch FNPT Hex Bushing
RBSS-48M32F	3 inch MNPT by 2 inch FNPT Hex Bushing 304 only
RBSS-48M40F	3 inch MNPT by 2-1/2 inch FNPT Hex Bushing



SSCX SERIES

SSCX Series is a Stainless Steel Cross with equal female NPT threads. It is available in both 304 and 316.

SKU	DESCRIPTION
SSCX-2F	1/8 inch Female Cross 304 only
SSCX-4F	1/4 inch Female Cross
SSCX-6F	3/8 inch Female Cross
SSCX-8F	1/2 inch Female Cross
SSCX-12F	3/4 inch Female Cross
SSCX-16F	1 inch Female Cross
SSCX-20F	1-1/4 inch Female Cross
SSCX-24F	1-1/2 inch Female Cross
SSCX-32F	2 inch Female Cross



SMWS SERIES

The SMWS Series is a Standard Brass Swivel. It has male NPT threads to a hose barb attachment. Also the swivel has a full 360° rotation. The temperature range for this swivel is -40° F to 160° F at 150 psi.

SKU	DESCRIPTION
SMWS-4M4B	1/4 MNPT by 1/4 Barb
SMWS-4M6MH	1/4 MNPT by 3/8 Barb High Flow
SMWS-4M6B	1/4 MNPT by 3/8 Barb
SMWS-8M8B	1/2 MNPT by 1/2 Barb



BFCR SERIES

BFCR Series is a brass-reducing connector with some sizes available in Nickel Plate. It can be used with grease, fuels, hydraulic systems, and refrigeration. The temperature range is -65° F to 250° F with an operating pressure of 1200 psi.

SKU	DESCRIPTION
BFCR-4-2	1/4 FNPT by 1/8 FNPT Brass Reducer NP
BFCR-6-2	3/8 FNPT by 1/8 FNPT Brass Reducer NP
BFCR-6-4	3/8 FNPT by 1/4 FNPT Brass Reducer NP
BFCR-8-2	1/2 FNPT by 1/8 FNPT Brass Reducer
BFCR-8-4	1/2 FNPT by 1/4 FNPT Brass Reducer
BFCR-8-6	1/2 FNPT by 3/8 FNPT Brass Reducer NP
BFCR-12-6	3/4 FNPT by 3/8 FNPT Brass Reducer


DTP SERIES



The DTP Series is a brass barbed tube plug. This fitting has excellent vibration resistance and requires no clamp. The maximum working pressure is 150 psi and the temperature range is -65° F to 90° F. This fitting can be used in humidifiers, pneumatic systems, and filters.

SKU	DESCRIPTION
DTP-33214	Tube Plug 3/32 ID by 1/4 ID
DTP-375	Tube Plug .375 ID
DTP-250	Tube Plug .250 ID
DTP-170	Tube Plug .170 ID


BSLP SERIES



BSLP Series is a brass slotted head Plug with NPT threads. The working pressure is 1200 psi and the temperature range is -65° F to 250° F. It is ASA, ASME, and SAE compliant. Nickel plated is available.

SKU	DESCRIPTION
BSLP-2	1/8 MNPT Brass Slotted Pipe Plug NP
BSLP-4	1/4 MNPT Brass Slotted Pipe Plug NP
BSLP-6	3/8 MNPT Brass Slotted Pipe Plug NP


BSQP SERIES



The BSQP Series is a Male NPT square head Plug. It is available in Brass in 6 sizes. Also, these fittings have a pressure rating of 1200 psi and a temperature range of -65° F to 250° F.

SKU	DESCRIPTION
BSQP-2	1/8 MNPT Square Head Brass Plug
BSQP-4	1/4 MNPT Square Head Brass Plug
BSQP-6	3/8 MNPT Square Head Brass Plug
BSQP-8	1/2 MNPT Square Head Brass Plug
BSQP-12	3/4 MNPT Square Head Brass Plug
BSQP-16	1 inch MNPT Square Head Brass Plug

BHFC SERIES



The BHFC Series is a Brass Cap that has female NPT threads. The working pressure is 1200 psi and the temperature range is -65° F to 250° F.

SKU	DESCRIPTION
BHFC-2	1/8 FNPT Brass Cap
BHFC-4	1/4 FNPT Brass Cap
BHFC-6	3/8 FNPT Brass Cap
BHFC-8	1/2 FNPT Brass Cap
BHFC-12	3/4 FNPT Brass Cap
BHFC-16	1 inch FNPT Brass Cap


HBNR SERIES



the HBNR Series is a Male NPT threaded Reducing Hex Nipple. It is available in Brass and Nickel-Plate. The fittings are ASA, ASME, and SAE certified.

SKU	DESCRIPTION
HBNR-4-2	1/4 MNPT by 1/8 MNPT Hex Nipple Reducer NP
HBNR-6-2	3/8 MNPT by 1/8 MNPT Hex Nipple Reducer NP
HBNR-6-4	3/8 MNPT by 1/4 MNPT Hex Nipple Reducer NP
HBNR-8-4	1/2 MNPT by 1/4 MNPT Hex Nipple Reducer NP
HBNR-8-6	1/2 MNPT by 3/8 MNPT Hex Nipple Reducer NP
HBNR-12-8	3/4 MNPT by 1/2 MNPT Hex Nipple Reducer

FBB SERIES



Brass faces Bushing with an operating pressure of 1200 psi. It can be used with iron, aluminum, steel, copper, brass, and bronze pipe. The temperature range is -65° F to 250° F. This bushing meets ASA, ASME, and SAE standards.

SKU	DESCRIPTION
FBB-4M2F	1/4 MNPT by 1/8 FNPT Brass Face Bushing
FBB-6M2F	3/8 MNPT by 1/8 FNPT Brass Face Bushing
FBB-6M4F	3/8 MNPT by 1/4 FNPT Brass Face Bushing
FBB-8M2F	1/2 MNPT by 1/8 FNPT Brass Face Bushing
FBB-8M4F	1/2 MNPT by 1/4 FNPT Brass Face Bushing
FBB-8M6F	1/2 MNPT by 3/8 FNPT Brass Face Bushing
FBB-12M4F	3/4 MNPT by 1/4 FNPT Brass Face Bushing
FBB-12M6F	3/4 MNPT by 3/8 FNPT Brass Face Bushing
FBB-12M8F	3/4 MNPT by 1/2 FNPT Brass Face Bushing
FBB-16M12F	1 inch MNPT by 3/4 FNPT Brass Face Bushing



SWFA SERIES

The SWFA Series is a Brass Swivel connector with male and female 10-32 UNF threads. Also available with 1/8" female NPT to 10-32 male UNF threads or 10-32 female UNF to 1/8 male NPT.

[table "421" not found /]



KNK SERIES- SWIVEL CONNECTOR

Nickel-plated brass Orbital Swivel connector with male-to-male, male-to-female, and female-to-female NPT threads with a full range of motion. The fittings swivel at the pipe threads and between the segments.

SKU	DESCRIPTION
KNK-4M	1/4 MNPT by 1/4 MNPT Orbital Swivel
KNK-4MF	1/4 MNPT by 1/4 FNPT Orbital Swivel
KNK-4F	1/4 FNPT by 1/4 FNPT Orbital Swivel


BSR SERIES



The BSR Series is a Brass Swivel connector with female to male NPT threads or male NPT threads to hose barb. In addition, the swivel allows full flow at any angle and the range of motion is 20° to 25°.

SKU	DESCRIPTION
BSR-4M4F	1/4 MNPT by 1/4 FNPT Brass Swivel
BSR-4M6F	1/4 MNPT by 3/8 FNPT Brass Swivel
BSR-6M6F	3/8 MNPT by 3/8 FNPT Brass Swivel
BSR-4M4B	1/4 MNPT by 1/4 Barb Brass Swivel
BSR-4M5B	1/4 MNPT by 5/16 Barb Brass Swivel
BSR-4M6B	1/4 MNPT by 3/8 Barb Brass Swivel
BSR-6M6B	1/4 MNPT by 3/8 Barb Brass Swivel


ESMF SERIES

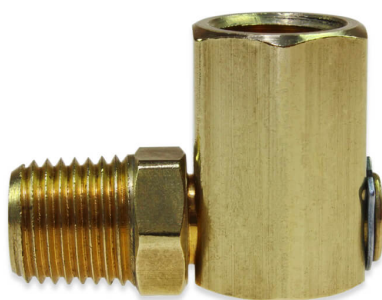

The ESMF Series is a Brass Swivel 90° Elbow connector with female to male NPT threads. Also, the swivel allows for a full 360° rotation.

SKU	DESCRIPTION
ESMF-4	1/4 MNPT by 1/4 FNPT 90° Swivel Elbow

SNPW SERIES

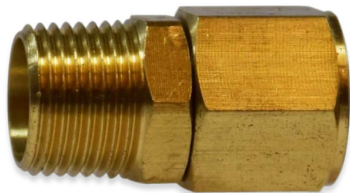

The SNPW Series is an Inline Brass Swivel connector with female to male NPT threads. The swivel allows for a full 360° rotation. Also it has Buna-N or FKM O-rings with a Polyphenylene thrust bearing.


SKU	DESCRIPTION
SNPW-4F4M	1/4 FNPT by 1/4 MNPT Brass Swivel
SNPW-6F4M	3/8 FNPT by 1/4 MNPT Brass Swivel
SNPW-6F6M	3/8 FNPT by 3/8 MNPT Brass Swivel

BHAS SERIES



The BHAS Series is a long Brass Swivel with male NPT threads to hose barbs. The maximum working pressure is 150 psi at -40° F to 160° F.

SKU	DESCRIPTION
BHAS-2M3B	1/8 MNPT by 3/16 Barb Long Swivel
BHAS-4M4B	1/4 MNPT by 1/4 Barb Long Swivel
BHAS-4M6B	1/4 MNPT by 3/8 Barb Long Swivel
BHAS-6M8B	3/8 MNPT by 1/2 Barb Long Swivel
BHAS-12M12B	3/4 MNPT by 3/4 Barb Long Swivel

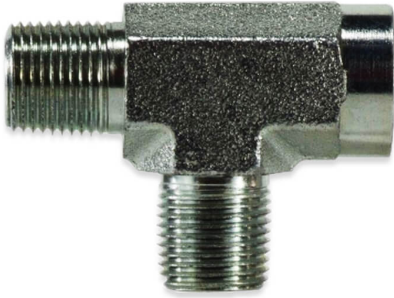

FTRSS SERIES

The FTRSS Series is a 316 Stainless Steel female run Tee with equal NPT threads.



SST SERIES

The SST Series is a 304 and 316 Stainless Steel female Tee with equal NPT threads.

SKU	DESCRIPTION
SST-2F	1/8 Female Tee
SST-4F	1/4 Female Tee
SST-6F	3/8 Female Tee
SST-8F	1/2 Female Tee
SST-12F	3/4 Female Tee
SST-16F	1 inch Female Tee
SST-20F	1-1/4 inch Female Tee
SST-24F	1-1/2 inch Female Tee
SST-32F	2 inch Female Tee



SSFX SERIES

The SSFX Series is a Stainless Steel union with female NPT threads. It is available in both 304 and 316.

SKU	DESCRIPTION
SSFX-2	1/8 FNPT Union
SSFX-4	1/4 FNPT Union
SSFX-6	3/8 FNPT Union
SSFX-8	1/2 FNPT Union
SSFX-12	3/4 FNPT Union
SSFX-16	1 inch FNPT Union
SSFX-20	1-1/4 inch FNPT Union
SSFX-24	1-1/2 inch FNPT Union
SSFX-32	2 inch FNPT Union



SBE45 SERIES

304 Stainless Steel 45° female NPT Elbow. Also available in 316 Stainless.

SKU	DESCRIPTION
SBE45-2F	1/8 FNPT 45° Elbow
SBE45-4F	1/4 FNPT 45° Elbow
SBE45-6F	3/8 FNPT 45° Elbow
SBE45-8F	1/2 FNPT 45° Elbow
SBE45-12F	3/4 FNPT 45° Elbow
SBE45-16F	1 inch FNPT 45° Elbow
SBE45-20F	1-1/4 inch FNPT 45° Elbow
SBE45-24F	1-1/2 inch FNPT 45° Elbow

SSTE SERIES



The SSTE Series is a 304 Stainless Steel male NPT to female NPT 90° Street Elbow. Also available in 316 Stainless.


SKU	DESCRIPTION
SSTE-2F	1/8 FNPT to MNPT 90° Elbow
SSTE-4F	1/4 FNPT to MNPT 90° Elbow
SSTE-6F	3/8 FNPT to MNPT 90° Elbow
SSTE-8F	1/2 FNPT to MNPT 90° Elbow
SSTE-12F	3/4 FNPT to MNPT 90° Elbow
SSTE-16F	1 inch FNPT to MNPT 90° Elbow
SSTE-20F	1-1/4 inch FNPT to MNPT 90° Elbow
SSTE-24F	1-1/2 inch FNPT to MNPT 90° Elbow
SSTE-32F	2 inch FNPT to MNPT 90° Elbow

SSWS SERIES



The SSWS Series is a Brass Swivel Adapter. It is available with male NPT threads to female NPT threads or a barb connection. The working pressure for both the threaded and barbed swivels is 300 psi. Both swivels have a bronze thrust bearing and EPDM or FKM seals. This swivel provides a full 360° rotation. The barbs are intended to be used with a hose clamp.

SKU	DESCRIPTION
SSWS-4M4B	1/4 MNPT by 1/4 Barb Brass Swivel
SSWS-6M6B	3/8 MNPT by 3/8 Barb Brass Swivel
SSWS-8F8M	1/8 FNPT by 1/8 MNPT Brass Swivel
SSWS-4F4M	1/4 FNPT by 1/4 MNPT Brass Swivel
SSWS-6F6M	3/8 FNPT by 3/8 MNPT Brass Swivel

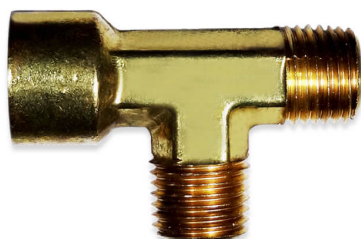

STF SERIES

The STF Series is a Forged Brass female-run Street Tee. These fittings can be used with iron, copper, or brass pipe. They can be used for water, chemicals, flammable gases, and fire sprinkler systems.

SKU	DESCRIPTION
STF-2F2MM	1/8 FNPT Inlet 1/8 MNPT Forged Tee
STF-4F4MM	1/4 FNPT Inlet 1/4 MNPT Forged Tee



MBFC SERIES


MBFC Series brass female-to-female connector with a central hex and equal threads on both ends. Available in Nickel Plate. Order example: MBFC-1428-4F



BFE45° SERIES

The BFE45° Series is a 45° female NPT Brass elbow. It is available in 4 sizes and Barstock only. The temperature range for this elbow is -65° F to 250° F. Also the operating pressure is 1200 psi.

SKU	DESCRIPTION
BFE45-2	1/8 FNPT 90° Brass Elbow Barstock
BFE45-4	1/4 FNPT 90° Brass Elbow Barstock
BFE45-6	3/8 FNPT 90° Brass Elbow Barstock
BFE45-8	1/2 FNPT 90° Brass Elbow Barstock



BAE-N SERIES

Bae-N Series is a Nickel-plated brass long extension connector that is available as equal or reducing.

SKU	DESCRIPTION
BAE-1032MF-N	10-32 M by 10-32 F Nickel-Plated Brass Long Extension
BAE-1032M2F-N	10-32 M by 1/8 FNPT Nickel-Plated Brass Long Extension
BAE-2M2F-N	1/8 MNPT by 1/8 FNPT Nickel-Plated Brass Long Extension
BAE-2M4F-N	1/8 MNPT by 1/4 FNPT Nickel-Plated Brass Long Extension
BAE-2M6F-N	1/8 MNPT by 3/8 FNPT Nickel-Plated Brass Long Extension
BAE-4M4F-N	1/4 MNPT by 1/4 FNPT Nickel-Plated Brass Long Extension
BAE-4M6F-N	1/4 MNPT by 3/8 FNPT Nickel-Plated Brass Long Extension
BAE-4M8F-N	1/4 MNPT by 1/8 FNPT Nickel-Plated Brass Long Extension
BAE-6M6F-N	3/8 MNPT by 3/8 FNPT Nickel-Plated Brass Long Extension
BAE-6M8F-N	3/8 MNPT by 1/8 FNPT Nickel-Plated Brass Long Extension
BAE-8M8F-N	1/2 MNPT by 1/2 FNPT Nickel-Plated Brass Long Extension

ATD SERIES



The ATD Series is an Adjustable Brass Tee adapter with UNF threads by single barbs.

SKU	DESCRIPTION
ATD-1018	10-32 by 1/8 Barb Adjustable Tee
ATD-10X1B	10-32 by 1/16 Barb Adjustable Tee

SSRC SERIES



The SSRC Series is a 304 Stainless Steel NPT threaded connector and reducing connector. It is also available in 316 Stainless Steel.

SKU	DESCRIPTION
SSRC-8	1/2 FNPT Connector
SSRC-12	3/4 FNPT Connector
SSRC-16	1 inch FNPT Connector
SSRC-24	1-1/2 inch FNPT Connector
SSRC-32	2 inch FNPT Connector
SSRC-4-2	1/4 FNPT by 1/8 FNPT Reducer
SSRC-6-2	3/8 FNPT by 1/8 FNPT Reducer
SSRC-6-4	3/8 FNPT by 1/4 FNPT Reducer
SSRC-8-2	1/2 FNPT by 1/8 FNPT Reducer
SSRC-8-4	1/2 FNPT by 1/4 FNPT Reducer
SSRC-8-6	1/2 FNPT by 3/8 FNPT Reducer
SSRC-12-2	3/4 FNPT by 1/8 FNPT Reducer
SSRC-12-4	3/4 FNPT by 1/4 FNPT Reducer
SSRC-12-6	3/4 FNPT by 3/8 FNPT Reducer
SSRC-12-8	3/4 FNPT by 1/2 FNPT Reducer
SSRC-16-6	1 inch FNPT by 3/8 FNPT Reducer NA 304
SSRC-16-8	1 inch FNPT by 1/2 FNPT Reducer
SSRC-16-12	1 inch FNPT by 3/4 FNPT Reducer

SKU	DESCRIPTION
SSRC-20-12	1-1/4 inch FNPT by 3/4 FNPT Reducer
SSRC-20-16	1-1/4 inch FNPT by 1 inch FNPT Reducer
SSRC-24-8	1-1/2 inch FNPT by 1/2 FNPT Reducer
SSRC-24-12	1-1/2 inch FNPT by 3/4 FNPT Reducer
SSRC-24-16	1-1/2 inch FNPT by 1 inch FNPT Reducer
SSRC-24-20	1-1/2 inch FNPT by 1-1/4 inch FNPT Reducer
SSRC-32-16	2 inch FNPT by 1 inch FNPT Reducer
SSRC-32-20	2 inch FNPT by 1-1/4 inch FNPT Reducer
SSRC-32-24	2 inch FNPT by 1-1/2 inch FNPT Reducer

SBE SERIES

304 Stainless Steel 90° female NPT Elbow. Also available in 316 Stainless.



SKU	DESCRIPTION
SBE-2F	1/8 FNPT 90° Elbow
SBE-4F	1/4 FNPT 90° Elbow
SBE-6F	3/8 FNPT 90° Elbow
SBE-8F	1/2 FNPT 90° Elbow
SBE-12F	3/4 FNPT 90° Elbow
SBE-16F	1 inch FNPT 90° Elbow
SBE-20F	1-1/4 inch FNPT 90° Elbow
SBE-24F	1-1/2 inch FNPT 90° Elbow
SBE-32F	2 inch FNPT 90° Elbow
SBE-40F	2-1/2 inch FNPT 90° Elbow
SBE-48F	3 inch FNPT 90° Elbow



HNS SERIES- HEX NIPPLE

The 304 Stainless Steel Hex Nipple with male NPT threads is a versatile fitting known for its corrosion resistance and durability. It is also available in 316 Stainless Steel, which offers even greater corrosion resistance. This makes it an excellent choice for industries where exposure to corrosive substances is common.

SKU	DESCRIPTION
HNS-2M	1/8 MNPT 304 Stainless Steel Hex Nipple
HNS-4M	1/4 MNPT 304 Stainless Steel Hex Nipple
HNS-6M	3/8 MNPT 304 Stainless Steel Hex Nipple
HNS-8M	1/2 MNPT 304 Stainless Steel Hex Nipple
HNS-12M	3/4 MNPT 304 Stainless Steel Hex Nipple
HNS-16M	1 inch MNPT 304 Stainless Steel Hex Nipple
HNS-20M	1-1/4 inch MNPT 304 Stainless Steel Hex Nipple
HNS-24M	1-1/2 inch MNPT 304 Stainless Steel Hex Nipple
HNS-32M	2 inch MNPT 304 Stainless Steel Hex Nipple

BHMT SERIES



The BHMT Series is a Brass Tee. The size available is 1/4" male NPT threads to 3/8" barb. In addition, the maximum pressure for this Tee is 150 psi and the temperature range is -40° F to 160° F. This product is designed to be used with hose clamps.

SKU	DESCRIPTION
BHMT-4M6B	1/4 MNPT to 3/8 Barb Brass Tee

UMO SERIES



UMO Series is a 10-32 male UNF Bleed Plug of Brass or 303 Stainless Steel. Orifice sizes for the Brass are 4-35 for Stainless Steel they are 6-35. O-rings are FKM. These fittings are available with a filter on the top. For sizing reference the **Orifice Sizing Chart**

USO SERIES



USO Series is a Brass Bleed Plug with a Sapphire Orifice. It has 10-32 male UNF threads and a Viton® seal. Standard orifice sizes range from .004" to .035". For sizing reference the **Orifice Sizing Chart**

RAO SERIES



The RAO Series is a Round Head NPT.

For sizing reference the [Orifice Sizing Chart](#)

DMO SERIES



DMO series is a brass or 303 Stainless Steel Orifice with a 10-32 male UNF thread by a 1/16" or 1/8" Barb. Brass orifice sizes 4-35, Stainless 6-35.

For sizing reference the [Orifice Sizing Chart](#).



SHO SERIES

The Sapphire Orifice in a Nylon sleeve is housed in a Brass 10-32 male UNF to a 1/16" barb fitting. The seal is Viton®. Nickel-plated Brass is also available. For sizing reference the [**Orifice Sizing Chart**](#)



MHO SERIES

The MHO Series is a brass or 303 Stainless Steel Hex Nipple Orifice with 1/8", 1/4", or 3/8" male NPT threads. Brass orifice sizes are 4-125, Stainless are 6-125. They are available with a filter.

For sizing reference the [**Orifice Sizing Chart**](#)

FAOH SERIES



The FAOH Series is a Flat Tip Hex Metal Orifice.

For sizing reference the [Orifice Sizing Chart](#)

ISR SERIES



The ISR Series is a Brass Thread Insert. For sizes visit the [Orifice Sizing Chart](#).

SKU	Description
10-32	.375 3/32 recessed hex
1/4-28	.375 1/8 recessed hex



MGMP SERIES

The MGMP Series is a brass male garden hose by male NPT. Available in 3/8", 1/2", 3/4" and 1".

SKU	Description
MGMP-12M	MGHT by 1/2 MNPT
MGMP-34M	MGHT by 3/4 MNPT
MGMP-38M	MGHT by 3/8 MNPT



FGMPS SERIES

The FGMPS Series is a Female garden hose by male NPT Swivel.

SKU	Description
FGMPS-12	FGH by 1/2 MNPT

MGSP SERIES



The MGSP Series is a brass male garden hose square Plug.

SKU	Description
MGSP	MGH Square Plug

FGMP SERIES



The FGMP Series is a Brass female garden hose by male NPT. Available in 3/8", 1/2" and 3/4".

SKU	Description
FGMP-38M	FGHT by 3/8 MNPT
FGMP-12M	FGHT by 1/2 MNPT
FGMP-34M	FGHT by 3/4 MNPT

BBV SERIES



The Inline Two-Way Brass Ball Valve has a maximum operating pressure of 500 psi and a maximum operating temperature of 180° F.


Inlet sizes are 1/4", 5/16", and 3/8" Barb, 1/4" Compression fitting, 1/4" female threads, 1/8" and 1/4" male threads, and 11/16" male nozzle.

The outlet sizes are 1/4" and 3/8" barb, 1/4" and 3/8" Compression, 1/4" female threads, and 1/8" and 1/4" male threads.

These valves are not panel mountable. The handle rests over the inlet side but the reverse configuration is available. The standard through hole is .218 but the 3/8" sizes have a .312 through hole.

SKU	Definition
BBV-4F4M	1/4 FNPT by 1/4 MNPT
BBV-4F4F	1/4 FNPT by 1/4 FNPT
BBV-4F4B	1/4 FNPT by 1/4 Barb
BBV-4F2M	1/4 FNPT by 1/8 MNPT
BBV-4F1116M	1/4 FNPT by 11/16 MNPT
BBV-4C4M	1/4 Comp by 1/4 MNPT
BBV-4C4C	1/4 Comp by 1/4 Comp
BBV-4B4M	1/4 Barb by 1/4 MNPT
BBV-2F2M	1/8 FNPT by 1/8 MNPT
BBV-2F2F	1/8 FNPT by 1/8 FNPT
BBV-12F12F	3/4 FNPT by 3/4 FNPT
BBV-6F6F	3/8 FNPT by 3/8 FNPT with .312 through hole
BBV-6F4M	3/8 FNPT by 1/4 MNPT with .312 through hole
BBV-6C6C	3/8 Comp by 3/8 Comp
BBV-6B6M	3/8 Barb by 3/8 MNPT
BBV-5PC4M	5/16 Plastic Comp by 1/4 MNPT
BBV-4PC4M	1/4 Plastic Comp by 1/4 MNPT
BBV-4M6C	1/4 MNPT by 1/4 Comp
BBV-4M4M	1/4 MNPT by 1/4 MNPT
BBV-4M4F	1/4 MNPT by 1/4 FNPT
BBV-4M1116F	1/4 MNPT 11/16 FNPT
BBV-4FL4M	1/4 Flare by 1/4 MNPT

RV5 SERIES



This is a Chrome-plated Forged Brass Mini Ball Valve with a Chrome-plated Brass ball. The maximum working pressure is 450 psi, 142 psi at 356°F, and 355 psi at 212°F. Available in female by female and male by female. Available with a flag handle, a lever handle, or a tee handle, or can be adjusted with a screwdriver.

This product is not lead-free.

SKU	Definition
RV5-2F	1/8 FNPT Taper Ball Valve
RV5-4F	1/4 FNPT Taper Ball Valve
RV5-4M4F	1/4 MNPT Taper by FNPT Taper Ball Valve
RV5-6M6F	3/8 MNPT Taper by FNPT Taper Full Port Ball Valve
RV5-6F	3/8 FNPT Taper Ball Valve
RV5-8F	1/2 FNPT Taper Ball Valve
RV5-2F2M	1/8 FNPT Taper 1/8 MNPT Taper Ball Valve
RV5-4F4M	1/4 FNPT Taper 1/4 MNPT Taper Ball Valve
RV5-6F6M	3/8 FNPT Taper 3/8 MNPT Taper Ball Valve

VBW SERIES



This two-way Brass Ball Valve has a pressure rating of 600 psi, and 150 psi is the working steam pressure. The maximum temperature is 366°F. The stem is blow-out proof, the ball is Chrome-plated Brass and the seat is PTFE. There is an adjustable screw packing nut. Both ports are equal in size and female NPT threads.

***Also available in 316 Stainless Steel. It has an internal entry blow-out-proof stem. The pressure rating is 2000 psi with a pressure test of API 598 psi. The ball seat and body seal are PTFE. Both ports are equal in size and female NPT threads.

SKU	Definition
VBW-4F	1/4 Female Two Way Ball Valve Full Port
VBW-6F	3/8 Female Two Way Ball Valve Full Port

SKU	Definition
VBW-8F	1/2 Female Two Way Ball Valve Full Port
VBW-12F	3/4 Female Two Way Ball Valve Full Port
VBW-16F	1 inch Female Two Way Ball Valve Full Port
VBW-20F	1-1/4 inch Female Two Way Ball Valve Full Port
VBW-24F	1-1/2 inch Female Two Way Ball Valve Full Port
VBW-32F	2 inch Female Two Way Ball Valve Full Port

RV2 SERIES



This is a Solid Chrome plated Brass Mini Ball Valve. This valve works in both directions because of a double seal system. It has a blow-out-proof Brass stem. The 1/4 turn handle has a mechanical stop. The maximum working pressure is 235 psi but will handle 300 psi at 75°F. The temperature range is 32°F to 176°F. Available in female by female and male by female. ****This product is not lead-free.****

SKU	Definition
RV2-2F	1/8 FNPT Taper Ball Valve
RV2-2M2F	1/8 MNPT Taper by 1/8 FNPT Taper Ball Valve
RV2-4F	1/4 FNPT Taper Ball Valve
RV2-6F	3/8 FNPT Taper Ball Valve
RV2-8F	1/2 FNPT Taper Ball Valve
RV2-2F2M	1/8 FNPT Taper by 1/8 MNPT Taper Ball Valve
RV2-4F4M	1/4 FNPT Taper by 1/4 MNPT Taper Ball Valve
RV2-6F6M	3/8 FNPT Taper by 3/8 MNPT Taper Ball Valve



PPS SERIES

This Brass Filter has a sintered Bronze element that can handle up to 9000 psi. The Filter comes with six different, replaceable porosity elements and can be used for air, oil, and water. The available porosity ratings are 40, 30, 25, 20, 10 and 5 um. Connections are 1/4" male to 1/4" female NPT threads and 3/8" male to 3/8" female NPT and um threads.



AAFM SERIES

The AAFM Series is a strong Aluminum housing with a Polyvinyl foam element that makes this muffler completely non-corrosive. The Polyvinyl insert is easily replaced so you don't have to replace the entire Muffler. Also, these mufflers have male NPT threads of 1/8", 1/4", 3/8", 1/2" and 1". The maximum operating pressure is 130 psi, the temperature range is 41° F to 140° F and it is recommended for use with air.

SKU	Definition
AAFM-2M	1/8 MNPT Aluminum Muffler Repairable
AAFM-4M	1/4 MNPT Aluminum Muffler Repairable
AAFM-6M	3/8 MNPT Aluminum Muffler Repairable
AAFM-8M	1/2 MNPT Aluminum Muffler Repairable
AAFM-12M	3/4 MNPT Aluminum Muffler Repairable
AAFM-16M	1 inch MNPT Aluminum Muffler Repairable



ZSAM SERIES

High-flow Muffler made of Zinc-plated Steel, has a 50 mesh, self-cleaning Stainless Steel screen. It is made for heavy-duty use. Because of the design of small holes all around the body of the shell, it exhausts air quietly without restricting the airflow. The maximum pressure is 300 psi and the temperature range is 35° F to 160° F. The male NPT threads available are 1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2" and 2".

SKU	Definition
ZSAM-2M	1/8 MNPT High Flow Steel Muffler
ZSAM-4M	1/4 MNPT High Flow Steel Muffler
ZSAM-6M	3/8 MNPT High Flow Steel Muffler
ZSAM-8M	1/2 MNPT High Flow Steel Muffler
ZSAM-12M	3/4 MNPT High Flow Steel Muffler
ZSAM-16M	1 inch MNPT High Flow Steel Muffler
ZSAM-20M	1-1/4 inch MNPT High Flow Steel Muffler
ZSAM-24M	1-1/2 inch MNPT High Flow Steel Muffler
ZSAM-32M	2 inch MNPT High Flow Steel Muffler

ABV SERIES

This low-profile 303 Stainless Steel Breather Vent can be used for vacuum relief and pressure equalization. It has standard male NPT threads of 1/8", 1/4", 3/8", 1/2", 3/4" and 1". The filter is equipped with a 316 Stainless Steel 70-micron screen.

SKU	Description
ABV-10-SS	10-32 UNF 303 Stainless Steel Muffler
ABV-12-SS	3/4 MNPT 303 Stainless Steel Muffler
ABV-16-SS	1 inch MNPT Stainless Steel Muffler
ABV-2-SS	1/8 MNPT 303 Stainless Steel Muffler
ABV-4-SS	1/4 MNPT 303 Stainless Steel Muffler
ABV-6-SS	3/8 MNPT 303 Stainless Steel Muffler
ABV-8-SS	1/2 MNPT 303 Stainless Steel Muffler

VTs-P SERIES



Nickel Plated Brass countersink plug vents will fit flush in any application: gearboxes, storage tanks, single-action cylinders. The Male NPT thread sizes are 1/8"-27, 1/4"-18, 3/8"-18, and 1/2"-14. A 40-micron sintered Bronze filter is standard but optional 10-micron and 90-micron are available. Maximum operating pressure is 150 psi and the operating temperature is 35° F to 300° F.

SKU	Description
VTs-P-18	1/8-27 Nickel-Plated Plug Vent
VTs-P-14	1/4-18 Nickel-Plated Plug Vent
VTs-P-38	3/8 MNPT Nickel-Plated Plug Vent
VTs-P-12	1/2 MNPT Nickel-Plated Plug Vent

VTs SERIES



This Muffler is made with a 303 **Stainless Steel body** which makes it resistant to atmospheric corrosion, sterilization solutions, and a wide variety of inorganic chemicals. It has a standard male pipe thread of 10-32" UNF threads and 1/8", 1/4", 3/8", 1/2", 3/4" and 1" NPT threads. The maximum operating pressure is 300 psi and the operating temperature range is 35° F to 392° F. It is equipped with a 316 Stainless Steel 70-micron filter screen. The Muffler can be used for gasoline, several chemical solutions, oil and air exhaust as well as intake filtering.

SKU	DESCRIPTION
VTs-10-70	10-32 UNF 70 Micron Stainless Steel Muffler
VTs-2-70	1/8 MNPT 70 Micron Stainless Steel Muffler

ACBV SERIES



The ACSV Series is a nickel-plated steel muffler that can be used for gearboxes and valve ports. 10-32 UNF threads and 1/16", 1/8", 1/4", 3/8", 1/2", 3/4" and 1" male NPT threads with a standard 40 micron sintered Bronze filter. 10 or 90 microns optional. Also available with female 1/8", 1/4", 3/8" and 1/2" NPT threads. The operating pressure is 300 psi and the working temperature range is 35° F to 300° F.

SKU	DESCRIPTION
ACBV-2F-40	1/8 FNPT Nickel-Plated Steel Muffler 40 Micron

BTR SERIES




The BTR Series bite-style Reducing Tee Fittings are available in Brass, Nickel-Plated Brass, or 303 Stainless are designed for use with Polyurethane or Polyethylene tubing for securely holding the tubing from slipping or pulling off. Available barb sizes range from 1/16 inch to 3/8 inch.

SKU	Description
BTR-078B1B	.078 to 1/16 inch Reducing Tee
BTR-170B1B	.170 to 1/16 inch Reducing Tee
BTR-170B78B	.170 to .78 Reducing Tee
BTR-1B2B	1/16 inch to 1/8 inch Reducing Tee
BTR-170B332B	.170 to 3/32 inch Reducing Tee
BTR-2B170B	1/8 inch by .170 Reducing Tee
BTR-2B1B	1/8 inch to 1/16 inch Reducing Tee
BTR-2B332B	1/8 inch to 3/32 inch Reducing Tee
BTR-2B732B	1/8 inch to 7/32 inch Reducing Tee
BTR-2B78B	1/8 inch to .078 Reducing Tee
BTR-3B2B	3/16 inch to 1/8 inch Reducing Tee
BTR-3B332B	3/16 inch to 3/32 inch Reducing Tee
BTR-3B78B	3/16 inch to .078 Reducing Tee
BTR-4B170B	1/4 inch to .170 Reducing Tee

SKU	Description
BTR-4B2B	1/4 inch to 1/8 inch Reducing Tee
BTR-4B332B	1/4 inch to 3/32 inch Reducing Tee
BTR-4B6B	1/4 inch to 3/8 inch Reducing Tee
BTR-4B732B	1/4 inch to 7/32 inch Reducing Tee
BTR-4B78B	1/4 inch to .078, 5/64 Reducing Tee
BTR-6B5B	3/8 inch to 5/16 inch Reducing Tee
BTR-732B1B	7/32 inch to 1/16 inch Reducing Tee
BTR-732B332B	7/32 inch to 3/32 inch Reducing Tee
BTR-732B078B	7/32 inch to .078 5/64, Reducing Tee
BTR-8B5B	1/2 inch to 5/16 inch Reducing Tee

MFC SERIES



The MFC Series is a Brass Cap with female UNF and NPT threads. This series is also available in Nickel-plated. Available in UNF threads of 10-32 inch and 1/4-28 inch and FNPT threads of 1/16 inch, 1/8 inch, 1/4 inch, 3/8 inch, and 1/2 inch.

SKU	Description
MFC-10F	10-32 Brass Cap
MFC-14F	1/4-28 Brass Cap
MFC-1F	1/16 FNPT Brass Cap
MFC-2F	1/8 FNPT Brass Cap NP
MFC-4F	1/4 FNPT Brass Cap NP
MFC-6F	3/8 FNPT Brass Cap NP

SBHE SERIES



The SBHE Series is 316 Stainless male NPT threads to barb 90° Elbow Adapter. Available MNPT thread sizes are 1/8 inch, 1/4 inch, 3/8 inch, and 1/2 inch. Available barb sizes are 1/4 inch, 3/8 inch, and 1/2 inch.

SKU

Description

SBHE-2M4B 1/8 inch MNPT by 1/4 inch 316 Stainless Steel Barbed 90° Elbow

SBHE-4M4B 1/4 inch MNPT by 1/4 inch 316 Stainless Steel Barbed 90° Elbow

SBHE-4M6B 1/4 inch MNPT by 3/8 inch 316 Stainless Steel Barbed 90° Elbow

SBHE-6M6B 3/8 inch MNPT by 3/8 inch 316 Stainless Steel Barbed 90° Elbow

SBHE-8M8B 1/2 inch MNPT by 1/2 inch 316 Stainless Steel Barbed 90° Elbow

SKHB SERIES



The SKHB Series is a cast 316 Stainless Steel adapter from male NPT threads to barb. The available MNPT thread sizes and barb sizes are: 1/4 inch, 3/8 inch, 1/2 inch, 3/4 inch, 1 inch, 1-1/4 inch, 1-1/2 inch, 2 inch, 2-1/2 inch, 3 inch, and 4 inch.

SKU

Description

SKHB-4M4B 1/4 MNPT by 1/4 Barb Cast 316 Stainless Steel Adapter

SKHB-6M6B 3/8 MNPT by 3/8 Barb Cast 316 Stainless Steel Adapter

SKHB-8M8B 1/2 MNPT by 1/2 Barb Cast 316 Stainless Steel Adapter

SKHB-12M12B 3/4 MNPT by 3/4 Barb Cast 316 Stainless Steel Adapter

SKHB-16M16B 1 inch MNPT by 1 Inch Barb Cast 316 Stainless Steel Adapter

SKHB-20M20B 1-1/4 inch MNPT by 1-1/4 Inch Barb Cast 316 Stainless Steel Adapter

SKHB-24M24B 1-1/2 inch MNPT by 1-1/2 Inch Barb Cast 316 Stainless Steel Adapter

SKHB-32M32B 2 inch MNPT by 2 Inch Barb Cast 316 Stainless Steel Adapter

SKHB-40M40B 2-1/2 inch MNPT by 2-1/2 Inch Barb Cast 316 Stainless Steel Adapter

SKHB-48M48B 3 inch MNPT by 3 Inch Barb Cast 316 Stainless Steel Adapter



SCHB SERIES

The SCHB Series is a cast 304 Stainless Steel Male NPT threads by barb adapter. Also available are barb to MNPT thread reducers. The available MNPT thread sizes are 1/4 inch, 3/8 inch, 1/2 inch, 1/8 inch, and 3/8 inch. The available barb sizes are 1/4 inch, 3/8 inch, 1/2 inch, and 3/4 inch.

SKU	Description
SCHB-4M4B	1/4 inch MNPT by 1/4 inch Cast 304 Stainless Steel Barbed Adapter
SCHB-6M6B	3/8 inch MNPT by 3/8 inch Cast 304 Stainless Steel Barbed Adapter
SCHB-8M8B	1/2 inch MNPT by 1/2 inch Cast 304 Stainless Steel Barbed Adapter
SCHB-2M4B	1/8 inch MNPT by 1/4 inch Cast 304 Stainless Steel Barbed Adapter
SCHB-4B6B	1/4 inch MNPT by 3/8 inch Cast 304 Stainless Steel Barbed Adapter
SCHB-6M8B	3/8 inch MNPT by 1/2 inch Cast 304 Stainless Steel Barbed Adapter
SCHB-8M12B	1/2 inch MNPT by 3/4 inch Cast 304 Stainless Steel Barbed Adapter



AO-IG SERIES

AO-IG Series is a thread-to-barb fitting made of FDA-approved Polysulfone with an integral precision orifice. The threads are 10-32 inch male UNF threads and the barbs are either 1/8 inch or 1/16 inch. The maximum operating pressure is 100 psi.

SKU	Description
AO-IG-10X1B-004	10-32 inch Male UNF by 1/16 inch, .004 Polysulfone Adapter Orifice
AO-IG-10X1B-005	10-32 inch Male UNF by 1/16 inch, .005 Polysulfone Adapter Orifice
AO-IG-10X1B-006	10-32 inch Male UNF by 1/16 inch, .006 Polysulfone Adapter Orifice
AO-IG-10X1B-007	10-32 inch Male UNF by 1/16 inch, .007 Polysulfone Adapter Orifice
AO-IG-10X1B-010	10-32 inch Male UNF by 1/16 inch, .010 Polysulfone Adapter Orifice
AO-IG-10X1B-012	10-32 inch Male UNF by 1/16 inch, .012 Polysulfone Adapter Orifice

SKU	Description
AO-IG-10X1B-016	10-32 inch Male UNF by 1/16 inch, .016 Polysulfone Adapter Orifice
AO-IG-10X1B-020	10-32 inch Male UNF by 1/16 inch, .020 Polysulfone Adapter Orifice
AO-IG-10X1B-025	10-32 inch Male UNF by 1/16 inch, .025 Polysulfone Adapter Orifice
AO-IG-10X1B-030	10-32 inch Male UNF by 1/16 inch, .030 Polysulfone Adapter Orifice
AO-IG-10X1B-040	10-32 inch Male UNF by 1/16 inch, .040 Polysulfone Adapter Orifice
AO-IG-10X2B-004	10-32 inch Male UNF by 1/8 inch, .004 Polysulfone Adapter Orifice
AO-IG-10X2B-005	10-32 inch Male UNF by 1/8 inch, .005 Polysulfone Adapter Orifice
AO-IG-10X2B-006	10-32 inch Male UNF by 1/8 inch, .006 Polysulfone Adapter Orifice
AO-IG-10X2B-007	10-32 inch Male UNF by 1/8 inch, .007 Polysulfone Adapter Orifice
AO-IG-10X2B-010	10-32 inch Male UNF by 1/8 inch, .010 Polysulfone Adapter Orifice
AO-IG-10X2B-012	10-32 inch Male UNF by 1/8 inch, .012 Polysulfone Adapter Orifice
AO-IG-10X2B-016	10-32 inch Male UNF by 1/8 inch, .016 Polysulfone Adapter Orifice
AO-IG-10X2B-020	10-32 inch Male UNF by 1/8 inch, .020 Polysulfone Adapter Orifice
AO-IG-10X2B-025	10-32 inch Male UNF by 1/8 inch, .025 Polysulfone Adapter Orifice
AO-IG-10X2B-030	10-32 inch Male UNF by 1/8 inch, .030 Polysulfone Adapter Orifice
AO-IG-10X2B-040	10-32 inch Male UNF by 1/8 inch, .040 Polysulfone Adapter Orifice

BCE SERIES



The BCE Series is a Sweep Elbow with bite-style barbs to hold the tubing securely and prevent slipping or pulling off. It is an excellent fitting to use with Polyurethane or Polyethylene tubing. It is made in Brass, Nickel-Plated Brass, or 303 Stainless.

SKU	Description
BCE-170B	.170 inch Bite-Style Barb Brass Sweep Elbow
BCE-1B	1/16 inch Bite-Style Barb Brass Sweep Elbow
BCE-2B	1/8 inch Bite-Style Barb Brass Sweep Elbow
BCE-332B	3/32 inch Bite-Style Barb Brass Sweep Elbow
BCE-4B	1/4 inch Bite-Style Barb Brass Sweep Elbow
BCE-6B	3/8 inch Bite-Style Barb Brass Sweep Elbow

BPC SERIES



The BPC Series is a Brass recessed hex Plug with male NPT threads. The working pressure is 1200 psi and the temperature range is -65° F to 250° F. It is ASA, ASME, and SAE compliant.

SKU	Description
BPC-1	1/16 inch MNPT Brass Recessed Hex Plug
BPC-2	1/8 inch MNPT Brass Recessed Hex Plug
BPC-4	1/4 inch MNPT Brass Recessed Hex Plug
BPC-6	3/8 inch MNPT Brass Recessed Hex Plug
BPC-8	1/2 inch MNPT Brass Recessed Hex Plug
BPC-12	3/4 inch MNPT Brass Recessed Hex Plug


BHP SERIES



The BHP Series is a Brass hollow-core Hex Plug. These plugs come in Male NPT thread sizes of 1/8 inch, 1/4 inch, 3/8 inch, 1/2 inch, 3/4 inch, and 1 inch. The temperature range for this plug is -65° F to 250° F and has a pressure rating of 1200 psi. This plug is also available in Nickel-Plate and Stainless Steel.

SKU	Description
BHP-2	1/8 MNPT Hollow Pipe Plug NP
BHP-4	1/4 MNPT Hollow Pipe Plug NP
BHP-6	3/8 MNPT Hollow Pipe Plug NP
BHP-8	1/2 MNPT Hollow Pipe Plug NP
BHP-12	3/4 MNPT Hollow Pipe Plug
BHP-16	1 inch MNPT Hollow Pipe Plug

BHN SERIES



This is a brass-close Hex Nipple with male NPT threads. The pressure rating for this piece is 1200 psi. It can be used for fuels, grease, refrigeration, and hydraulic systems. Some sizes are available in nickel plates.

SKU	Description
BHN-2M	1/8 MNPT Brass Hex Nipple NP
BHN-14M-L	1/4 MNPT Brass Hex Nipple Short
BHN-4M-L	1/4 MNPT Brass Hex Nipple .112 Short NP
BHN-6M	3/8 MNPT Brass Hex Nipple NP
BHN-8M-L	1/2 MNPT Brass Hex Nipple Short NP
BHN-12M	3/4 MNPT Brass Hex Nipple NP
BHN-16M	1 Inch MNPT Brass Hex Nipple


STM SERIES



The STM Series is a male-run street tee available in forged or bar stock Brass. The temperature range for these tees is -65° F to 250° F. The working pressure is 1200 psi. These are ASA, ASME, and SAE compliant. Nickel-Plate is available in some sizes.

SKU	Description
STM-2M2FF	1/8 MNPT by 1/8 FNPT Street Tee B F NP
STM-6M6FF	3/8 MNPT by 3/8 FNPT Street Tee B F NP
STM-8M8FF	1/2 MNPT by 1/2 FNPT Street Tee B F
STM-12M12FF	3/4 MNPT by 3/4 FNPT Street Tee B F

BFBT SERIES



The BFBT Series is a male by male by female forged Brass Tee. This series is available in two sizes: 1/8 inch and 1/4 inch. The 1/8-inch size is available in nickel-plated brass.

SKU	Description
BFBT-2M2F	1/8 inch MNPT Run by 1/8 inch FNPT Leg
BFBT-2M2F-NP	1/8 inch MNPT Run by 1/8 inch FNPT Leg Nickel Plated
BFBT-4M4F	1/4 inch MNPT Run by 1/4 inch FNPT Leg

BBFTR SERIES



BBFTR Series is a forged Brass female reducing Tee. The operating pressure for this tee is 1200 psi with a temperature range of -65° F to 250° F. The threads are Female NPT.

SKU	Description
BBFTR-2-2-4	1/8 inch FNPT by 1/8 inch FNPT by 1/4 inch FNPT Brass Reducing Tee
BBFTR-4-4-2	1/4 inch FNPT by 1/4 inch FNPT by 1/8 inch FNPT Brass Reducing Tee
BBFTR-4-4-6	1/4 inch FNPT by 1/4 inch FNPT by 3/8 inch FNPT Brass Reducing Tee
BBFTR-6-4-6	3/8 inch FNPT by 1/4 inch FNPT by 3/8 inch FNPT Brass Reducing Tee
BBFTR-6-6-4	3/8 inch FNPT by 3/8 inch FNPT by 1/4 inch FNPT Brass Reducing Tee
BBFTR-8-8-6	1/2 inch FNPT by 1/2 inch FNPT by 3/8 inch FNPT Brass Reducing Tee
BBFTR-12-8-12	3/4 inch FNPT by 1/2 inch FNPT by 3/4 inch FNPT Brass Reducing Tee
BBFTR-12-12-8	3/4 inch FNPT by 3/4 inch FNPT by 1/2 inch FNPT Brass Reducing Tee

BME SERIES



The BME Series is a 90° Brass forged Elbow, available in both equal and reducing sizes. Available Male NPT thread sizes are 1/8 inch, 1/4 inch, 3/8 inch, and 1/2 inch. The temperature range is -65° F to 250° F. The operating pressure is 1200 psi. They can be used for grease, fuels, refrigeration, and hydraulic applications. They meet ASA, ASME, and SAE specifications. Nickel-plated brass is available.


SKU	Description
BME-2	1/8 MNPT Forged Brass Elbow NP
BME-4	1/4 MNPT Forged Brass Elbow NP
BME-6	3/8 MNPT Forged Brass Elbow NP
BME-8	1/2 MNPT Forged Brass Elbow NP
BME-8-4	1/2 MNPT by 1/4 MNPT Forged Elbow Reducer
BME-6-4	3/8 MNPT by 1/4 MNPT Forged Elbow Reducer
BME-8-6	3/8 MNPT by 1/4 MNPT Forged Elbow Reducer

BAE SERIES



Brass extension connectors are available as equal or reducing with NPT threads.

SKU	Description
BAE-18MF	1/8 inch MNPT by 1/8 inch FNPT Brass Extension
BAE-38MF	3/8 inch MNPT by 3/8 inch FNPT Brass Extension
BAE-12MF	1/2 inch MNPT by 1/2 inch FNPT Brass Extension
BAE-34MF	3/4 inch MNPT by 3/4 inch FNPT Brass Extension
BAE-4M-2F	1/4 inch MNPT by 1/8 inch FNPT Brass Reducing Reducing Extension
BAE-6M-2F	3/8 inch MNPT by 1/8 inch FNPT Brass Reducing Reducing Extension
BAE-6M-4F	3/8 inch MNPT by 1/4 inch FNPT Brass Reducing Reducing Extension
BAE-8M-4F	1/2 inch MNPT by 1/4 inch FNPT Brass Reducing Reducing Extension
BAE-8M-6F	1/2 inch MNPT by 3/8 inch FNPT Brass Reducing Reducing Extension

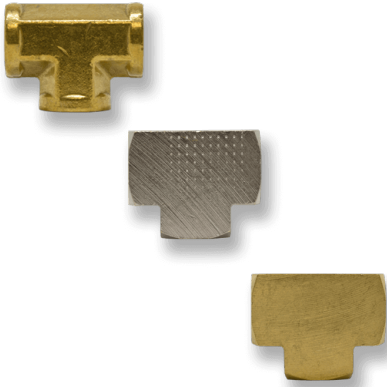

BFT SERIES

The BFT Series is a Brass Tee with female NPT threads. The operating pressure is 1200 psi and the temperature range is -65° F to 250° F. This tee is available as Forged or Barstock. Nickel Plate is also available in barstock.

SKU	Description
BFT-2	1/8 FNPT Brass Tee B F NP
BFT-4	1/4 FNPT Brass Tee B F NP
BFT-6	3/8 FNPT Brass Tee B F NP
BFT-8	1/2 FNPT Brass Tee B F NP
BFT-12	3/4 FNPT Brass Tee B F NP
BFT-16	1 inch FNPT Brass Tee F



BSE45 SERIES


The BSE45 Series are 45° Brass Elbows available as both forged and barstock. The temperature range is -65° F to 250° F. The operating pressure is 1200 psi. They can be used for grease, fuels, refrigeration, and hydraulic applications. They meet ASA, ASME, and SAE specifications.

SKU	Description
BSE45-2M2F	1/8 MNPT by 1/8 FNPT Brass 45° Elbow B F
BSE45-4M4F	1/4 MNPT by 1/4 FNPT Brass 45° Elbow B F
BSE45-6M6F	3/8 MNPT by 3/8 FNPT Brass 45° Elbow B F
BSE45-8M8F	1/2 MNPT by 1/2 FNPT Brass 45° Elbow B
BSE45-12M12F	3/4 MNPT by 3/4 FNPT Brass 45° Elbow B

SKU	Description
BSE45-2M2F	1/8 MNPT by 1/8 FNPT Brass 45° Elbow B F
BSE45-4M4F	1/4 MNPT by 1/4 FNPT Brass 45° Elbow B F
BSE45-6M6F	3/8 MNPT by 3/8 FNPT Brass 45° Elbow B F

SKU	Description
BSE45-8M8F	1/2 MNPT by 1/2 FNPT Brass 45° Elbow B
BSE45-12M12F	3/4 MNPT by 3/4 FNPT Brass 45° Elbow B

CNB SERIES



The CNB Series is a Brass-close Nipple with male NPT threads. The pressure rating for this piece is 1200 psi. It can be used for fuels, grease, refrigeration, and hydraulic systems. Some sizes are available in nickel plates.

SKU	Description
CNB-2	1/8 inch MNPT Brass Close Nipple
CNB-4	1/4 inch MNPT Brass Close Nipple
CNB-6	3/8 inch MNPT Brass Close Nipple 1 inch long
CNB-8	1/8 inch MNPT Brass Close Nipple

MCC SERIES



The MCC Series is a Chrome-Plated Brass Ferrules Compression fitting. The pressure range is vacuum to 100 psi and the working temperature range is -40°F to 180°F. Tubing options for use with this fitting are Polyethylene, Polyurethane, and PVC. Sizes available for pipe thread are 10-32 inch male UNF, 1/8 inch MNPT, and 1/4 inch MNPT. Available tubing sizes are 1/8 inch, 1/4 inch, and 3/8 inch.

SKU	Description
MCC-1018	10-32 inch Male UNF with 5/64 inch ID by 1/8 inch OD Chrome-Plated Brass Compression Fitting
MCC-1014	10-32 inch Male UNF with .170 inch ID by 1/4 inch OD Chrome-Plated Brass Compression Fitting

SKU	Description
MCC-2M18	1/8 inch MNPT with 5/64 inch ID by 1/8 inch OD Chrome-Plated Brass Compression Fitting
MCC-2M14	1/8 inch MNPT with .170 inch ID by 1/4 inch OD Chrome-Plated Brass Compression Fitting
MCC-2M38	1/8 inch MNPT with 1/4 inch ID by 3/8 inch OD Chrome-Plated Brass Compression Fitting
MCC-4M14	1/4 inch MNPT with .170 inch ID by 1/4 inch OD Chrome-Plated Brass Compression Fitting
MCC-4M38	1/4 inch MNPT with 1/4 inch ID by 3/8 inch OD Chrome-Plated Brass Compression Fitting

MBT SERIES



The MBT Series is a Brass male branch tee. Available Male and Female NPT thread sizes are 1/8 inch, 1/4 inch, 3/8 inch, 1/2 inch, and 3/4 inch. It is available for forged, bar-stock and nickel-plated (noted below).

SKU	Description
MBT-2M2F	1/8 MNPT by 1/8 FNPT Male Branch Tee B F NP
MBT-4M4F	1/4 MNPT by 1/4 FNPT Male Branch Tee B F NP
MBT-6M6F	3/8 MNPT by 3/8 FNPT Male Branch Tee B NP
MBT-8M8F	1/2 MNPT by 1/2 FNPT Male Branch Tee B NP
MBT-12M12F	3/4 MNPT by 3/4 FNPT Male Branch Tee B




BFE SERIES

90° Brass Elbow with female NPT threads. It is available in equal and reduced sizes. It is also available in Forged and Barstock. (As noted below in size list.)

Some sizes are also available in nickel plates.

SKU	Description
BFE-2	1/8 FNPT 90° Brass Elbow B F NP
BFE-4	1/4 FNPT 90° Brass Elbow B F NP
BFE-6	3/8 FNPT 90° Brass Elbow B F
BFE-8	1/2 FNPT 90° Brass Elbow B F
BFE-12	3/4 FNPT 90° Brass Elbow B F
BFE-1	1 inch FNPT 90° Brass Elbow F
BFE-4-2	1/4 FNPT by 1/8 FNPT 90° Brass Elbow Reducer F
BFE-6-4	3/8 FNPT by 1/4 FNPT 90° Brass Elbow Reducer F
BFE-8-6	1/2 FNPT by 3/8 FNPT 90° Brass Elbow Reducer F

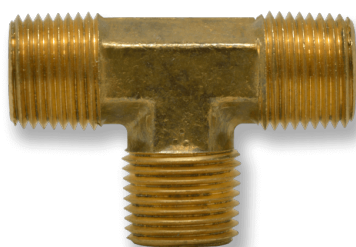

BMT SERIES

The BMT Series is a male forged Brass Tee Connector. Available male NPT thread sizes are 1/8 inch, 1/4 inch, 3/8 inch, and 1/2 inch. All sizes are also available in nickel-plate.

SKU	Description
BMT-2	1/8 inch MNPT Brass Forged Tee Connector
BMT-4	1/4 inch MNPT Brass Forged Tee Connector
BMT-6	3/8 inch MNPT Brass Forged Tee Connector
BMT-8	1/2 inch MNPT Brass Forged Tee Connector



SAMGB SERIES

Male garden hose by Barb. Barb sizes available 3/16", 3/8", 1/2", 5/8", and 3/4". Machined of 316 Stainless Steel.

SKU	Description
SAMGB-10B	3/4 MGH by 5/8 Barb 316 Stainless Steel
SAMGB-12B	3/4 MGH by 3/4 Barb 316 Stainless Steel
SAMGB-8B	3/4 MGH by 1/2 Barb 316 Stainless Steel



LNB LONG SERIES

The LNB Series is a Male NPT threaded nipple. The sizes range from 1/8 inch in diameter by 12 inches in length up to 1 inch in diameter by 12 feet in length. These nipples are available in Brass, lead-free Brass, Stainless, and Nickel-Plated Brass.

SKU	Description
LNB-1-4	1/16 inch MNPT Long Nipple 4 inch length
LNB-4-1.5	1/4 inch MNPT Nipple 1.50 inch length
LNB-4-6	1/4 inch MNPT Nipple 6 inch length
LNB-6-1.5	3/8 inch MNPT Nipple 1.5 inch length
LNB-6-2	3/8 inch MNPT Nipple 2 inch length
LNB-6-2.5	3/8 inch MNPT Nipple 2.5 inch length
LNB-6-3	3/8 inch MNPT Nipple 3 inch length
LNB-6-3.5	3/8 inch MNPT Nipple 3.5 inch length
LNB-8-1.5	1/2 inch MNPT Nipple 1.5 inch length
LNB-8-2	1/2 inch MNPT Nipple 2 inch length
LNB-16-3	1 inch MNPT Nipple 3 inch length



BFCC SERIES

Brass Cross has female NPT threads. The operating pressure is 1200 psi and the temperature range is -65° F to 250° F. The cross is available as Forged or Barstock. (Availabilities are noted below.)

SKU	Description
BFCC-2	1/8 FNPT Brass Cross BF
BFCC-4	1/4 FNPT Brass Cross BF
BFCC-6	3/8 FNPT Brass Cross BF
BFCC-8	1/2 FNPT Brass Cross BF
BFCC-12	3/4 FNPT Brass Cross B



BFC SERIES

Brass connector with equal female NPT threads. The pressure rating for this connector is 1200 psi and the temperature range is -65° F to 250° F. It meets the specifications for ASA, ASMER, and SAE.

SKU	Description
BFC-2	1/8 inch FNPT Brass Equal Pipe Connector
BFC-4	1/4 inch FNPT Brass Equal Pipe Connector
BFC-6	3/8 inch FNPT Brass Equal Pipe Connector
BFC-8	1/2 inch FNPT Brass Equal Pipe Connector
BFC-12	3/4 inch FNPT Brass Equal Pipe Connector
BFC-16	1 inch FNPT Brass Equal Pipe Connector



BHFA SERIES

The BHFA Series is a Brass multi-barbed rigid female barstock adapter. It has Female NPT threads on the opposite side of the barbed end. Available FNPT thread sizes are 1/8 inch, 1/4 inch, 3/8 inch, 1/2 inch, and 3/4 inch. Available barb sizes range from 1/8 inch to 1 inch. Flow can be equal or reduced. The temperature range is -40° F to 160° F and the working pressure is 150 psi.

SKU	Description
BHFA-2F2B	1/8 inch FNPT by 1/8 inch Brass Multi-Barbed Adapter
BHFA-2F3B	1/8 inch FNPT by 3/16 inch Brass Multi-Barbed Adapter
BHFA-2F4B	1/8 inch FNPT by 1/4 inch Brass Multi-Barbed Adapter
BHFA-2F5B	1/8 inch FNPT by 5/16 inch Brass Multi-Barbed Adapter
BHFA-2F6B	1/8 inch FNPT by 3/8 inch Brass Multi-Barbed Adapter
BHFA-4F2B	1/4 inch FNPT by 1/8 inch Brass Multi-Barbed Adapter
BHFA-4F3B	1/4 inch FNPT by 3/16 inch Brass Multi-Barbed Adapter
BHFA-4F4B	1/4 inch FNPT by 1/4 inch Brass Multi-Barbed Adapter
BHFA-4F5B	1/4 inch FNPT by 5/16 inch Brass Multi-Barbed Adapter
BHFA-4F6B	1/4 inch FNPT by 3/8 inch Brass Multi-Barbed Adapter
BHFA-4F8B	1/4 inch FNPT by 1/2 inch Brass Multi-Barbed Adapter
BHFA-6F4B	3/8 inch FNPT by 1/4 inch Brass Multi-Barbed Adapter
BHFA-6F5B	3/8 inch FNPT by 5/16 inch Brass Multi-Barbed Adapter
BHFA-6F6B	3/8 inch FNPT by 3/8 inch Brass Multi-Barbed Adapter
BHFA-6F8B	3/8 inch FNPT by 1/2 inch Brass Multi-Barbed Adapter
BHFA-8F6B	1/2 inch FNPT by 3/8 inch Brass Multi-Barbed Adapter
BHFA-8F8B	1/2 inch FNPT by 1/2 inch Brass Multi-Barbed Adapter



BHBE SERIES

The BHBE Series is a forged Brass multi-barbed 90° Elbow connector. Barb sizes range from 1/8 inch to 1/2 inch. The working temperature range is -40° F to 160° F. Maximum pressure rating is 150 psi. This fitting is designed to be used with a hose clamp.

SKU

Description

BHBE-4-2	1/4 inch by 1/8 inch Brass Multi-Barbed Reducing Elbow Connector
BHBE-4-4	1/4 inch by 1/4 inch Brass Multi-Barbed Elbow Connector
BHBE-5-5	5/16 inch by 5/16 inch Brass Multi-Barbed Elbow Connector
BHBE-6-2	3/8 inch by 1/8 inch Brass Multi-Barbed Reducing Elbow Connector
BHBE-6-4	3/8 inch by 1/4 inch Brass Multi-Barbed Reducing Elbow Connector
BHBE-6-6	3/8 inch by 3/8 inch Brass Multi-Barbed Elbow Connector
BHBE-8-4	1/2 inch by 1/4 inch Brass Multi-Barbed Reducing Elbow Connector
BHBE-8-6	1/2 inch by 3/8 inch Brass Multi-Barbed Reducing Elbow Connector
BHBE-8-8	1/2 inch by 1/2 inch Brass Multi-Barbed Elbow Connector



BHME45 SERIES

The BHME45 Series is a Forged Brass multi-barbed 45° Elbow with male NPT threads. Flow can be equal or reduced. The temperature range is -40° F to 160° F and the working pressure is 150 psi. Furthermore, the Barstock is optional for the sizes shown below.

SKU

Description

BHME45-2M6B	1/8 inch MNPT by 3/8 inch Brass Multi-Barbed 45 Degree Elbow Adapter
BHME45-2M4B	1/8 inch MNPT by 1/4 inch Brass Multi-Barbed 45 Degree Elbow Adapter
BHME45-4M4B	1/4 inch MNPT by 1/4 inch Brass Multi-Barbed 45 Degree Elbow Adapter
BHME45-4M4B-B	1/4 inch MNPT by 1/4 inch Brass Multi-Barbed 45 Degree Barstock Elbow Adapter
BHME45-4M6B	1/4 inch MNPT by 3/8 inch Brass Multi-Barbed 45 Degree Elbow Adapter

SKU	Description
BHME45-4M8B	1/4 inch MNPT by 1/2 inch Brass Multi-Barbed 45 Degree Elbow Adapter
BHME45-6M6B	3/8 inch MNPT by 3/8 inch Brass Multi-Barbed 45 Degree Elbow Adapter
BHME-456M8B	3/8 inch MNPT by 1/2 inch Brass Multi-Barbed 45 Degree Elbow Adapter
BHME-456M10B	3/8 inch MNPT by 5/8 inch Brass Multi-Barbed 45 Degree Elbow Adapter



BHM SERIES

The BHM Series is a barstock Brass multi-barbed straight connector. Barb sizes range from 1/8 inch to 1 inch. The working temperature range is -40° F to 160° F. Maximum pressure rating is 150 psi. This fitting is designed to be used with a hose clamp.

SKU	Description
BHM-2	1/8 inch by 1/8 inch Brass Multi-Barbed Straight Connector
BHM-3	3/16 inch by 3/16 inch Brass Multi-Barbed Straight Connector
BHM-4	1/4 inch by 1/4 inch Brass Multi-Barbed Straight Connector
BHM-5	5/16 inch by 5/16 inch Brass Multi-Barbed Straight Connector
BHM-6	3/8 inch by 3/8 inch Brass Multi-Barbed Straight Connector
BHM-8	1/2 inch by 1/2 inch Brass Multi-Barbed Straight Connector
BHM-10	5/8 inch by 5/8 inch Brass Multi-Barbed Straight Connector
BHM-12	3/4 inch by 3/4 inch Brass Multi-Barbed Straight Connector

BHT SERIES



The BHT Series is a forged Brass multi-barbed Tee connector. Available barb sizes are 1/8 inch, 1/4 inch, and 3/4 inch. The working temperature range is -40° F to 160° F. Maximum working pressure is 150 psi. This fitting is designed for use with a hose clamp.

SKU	Description
BHT-2	1/8 inch Brass Multi-Barbed Tee Connector
BHT-4	1/4 inch Brass Multi-Barbed Tee Connector
BHT-34	3/4 inch Brass Multi-Barbed Tee Connector

BHFE SERIES



The BHFE Series is a Brass 90° Elbow, Female NPT threads to multi-barb Adapter. Available FNPT sizes are 1/8 inch, 1/4 inch, and 3/8 inch. Available barb sizes are 1/4 inch, 5/16 inch, 3/8 inch, and 1/2 inch. The temperature range is -40° F to 160° F. The maximum working pressure is 150 psi. This fitting is intended for use with a hose clamp.

SKU	Description
BHFE-2F4B	1/8 inch FNPT by 1/4 inch Brass Multi-Barbed 90° Elbow Adapter
BHFE-2F5B	1/8 inch FNPT by 5/16 inch Brass Multi-Barbed 90° Elbow Adapter
BHFE-2F6B	1/8 inch FNPT by 3/8 inch Brass Multi-Barbed 90° Elbow Adapter
BHFE-4F4B	1/4 inch FNPT by 1/4 inch Brass Multi-Barbed 90° Elbow Adapter
BHFE-4F5B	1/4 inch FNPT by 5/16 inch Brass Multi-Barbed 90° Elbow Adapter
BHFE-4F6B	1/4 inch FNPT by 3/8 inch Brass Multi-Barbed 90° Elbow Adapter
BHFE-4F8B	1/4 inch FNPT by 1/2 inch Brass Multi-Barbed 90° Elbow Adapter
BHFE-6F4B	3/8 inch FNPT by 1/4 inch Brass Multi-Barbed 90° Elbow Adapter
BHFE-6F6B	3/8 inch FNPT by 3/8 inch Brass Multi-Barbed 90° Elbow Adapter
BHFE-6F8B	3/8 inch FNPT by 1/2 inch Brass Multi-Barbed 90° Elbow Adapter
BHFE-8F6B	1/2 inch FNPT by 3/8 inch Brass Multi-Barbed 90° Elbow Adapter



BHMA SERIES

The BHMA Series is a rigid multi-barbed Brass Barstock Adapter. It adapts from male NPT threads to barbs. Available MNPT sizes range from 1/16 inch to 1 inch. Available barb sizes range from 1/8 inch to 3/4 inch. Flow can be equal or reduced. The temperature range is -40° F to 160° F and the working pressure is 150 psi.

SKU	Description
BHMA-1M2B	1/16 inch MNPT by 1/8 inch Brass Multi-Barbed Brass Straight Adapter
BHMA-1M4B	1/16 inch MNPT by 1/4 inch Brass Multi-Barbed Brass Straight Adapter
BHMA-2M2B	1/8 inch MNPT by 1/8 inch Brass Multi-Barbed Brass Straight Adapter
BHMA-2M2B-SH	1/8 inch MNPT by 1/8 inch Brass Multi-Barbed Brass Straight Adapter Short .475
BHMA-2M3B	1/8 inch MNPT by 3/16 inch Brass Multi-Barbed Brass Straight Adapter
BHMA-2M4B	1/8 inch MNPT by 1/4 inch Brass Multi-Barbed Brass Straight Adapter
BHMA-2M5B	1/8 inch MNPT by 5/16 inch Brass Multi-Barbed Brass Straight Adapter
BHMA-2M6B	1/8 inch MNPT by 3/8 inch Brass Multi-Barbed Brass Straight Adapter
BHMA-2M8B	1/8 inch MNPT by 1/2 inch Brass Multi-Barbed Brass Straight Adapter
BHMA-4M2B	1/4 inch MNPT by 1/8 inch Brass Multi-Barbed Brass Straight Adapter
BHMA-4M4B	1/4 inch MNPT by 1/4 inch Brass Multi-Barbed Brass Straight Adapter
BHMA-4M6B	1/4 inch MNPT by 3/8 inch Brass Multi-Barbed Brass Straight Adapter
BHMA-4M8B	1/4 inch MNPT by 1/2 inch Brass Multi-Barbed Brass Straight Adapter
BHMA-6M4B	3/8 inch MNPT by 1/4 inch Brass Multi-Barbed Brass Straight Adapter
BHMA-6M6B	3/8 inch MNPT by 3/8 inch Brass Multi-Barbed Brass Straight Adapter
BHMA-6M8B	3/8 inch MNPT by 1/2 inch Brass Multi-Barbed Brass Straight Adapter
BHMA-8M8B	1/2 inch MNPT by 1/2 inch Brass Multi-Barbed Brass Straight Adapter

SKU	Description
BHMA-12M12B	3/4 inch MNPT by 3/4 inch Brass Multi-Barbed Brass Straight Adapter
BHMA-12M8B	3/4 inch MNPT by 1/2 inch Brass Multi-Barbed Brass Straight Adapter

BHME SERIES



The BHME Series is a forged Brass multi-barbed 90° Elbow Adapter with male NPT threads. Available MNPT thread sizes range from 1/8 inch to 1 inch. In addition, available barb sizes range from 3/16 inches to 3/4 inches. Flow can be equal or reduced. The working temperature range is -40° to 160° and the working pressure is 150 psi. Barstock is optional for some sizes (see list below).

SKU	Description
BHME-2M3B	1/8 MNPT by 3/16 Hose Barb Elbow Forged
BHME-2M4B	1/8 MNPT By 1/4 Hose Barb Elbow Forged B
BHME-2M5B	1/8 MNPT By 5/16 Hose Barb Elbow Forged
BHME-2M6B	1/8 MNPT By 3/8 Barb Elbow Forged
BHME-38M18B-R2	3/8 MNPT By 1/8 Hose Barb Elbow Forged 2 Piece Unit
BHME-4M3B	1/4 MNPT by 3/16 Hose Barb Elbow Forged
BHME-4M4B	1/4 MNPT By 1/4 Hose Barb Elbow Forged B
BHME-4M5B	1/4 MNPT by 5/16 Hose Barb Elbow Forged
BHME-4M6B	1/4 MNPT by 3/8 Hose Barb Elbow Forged B
BHME-4M8B	1/4 MNPT By 1/2 Hose Barb Elbow Forged
BHME-6M4B-B	3/8 MNPT By 1/4 Hose Barb Elbow Barstock
BHME-6M5B	3/8 MNPT By 5/16 Hose Barb Elbow Forged
BHME-6M6B	3/8 MNPT By 3/8 Hose Barb Elbow Forged B
BHME-6M8B	3/8 MNPT By 1/2 Hose Barb Elbow Forged B
BHME-8M6B	1/2 MNPT By 3/8 Hose Barb Elbow Forged
BHME-8M8B	1/2 MNPT By 1/2 Hose Barb Elbow Forged
BHME-12M12B	3/4 MNPT by 3/4 Barb Elbow
BHME-16M12B	1 Inch MNPT by 3/4 Barb Elbow




HRB SERIES- BRASS HEX

The HRB Series is a Brass Hex Bushing with male and female NPT threads. Available NPT thread sizes range from 1/8 inch to 1 inch. This Bushing has an operating pressure of 1200 psi and a temperature range of -65° F to 250° F. It is typically used for grease, fuels, and refrigeration. It can be used with brass, bronze, copper, aluminum, iron, and steel pipe. This bushing meets the standards of ASA, ASME, and SAE. This bushing is not lead-free.


SKU	Description
HRB-4M2F	1/4 inch MNPT by 1/8 inch FNPT Brass Reducer Bushing
HRB-6M2F	3/8 inch MNPT by 1/8 inch FNPT Brass Reducer Bushing
HRB-6M4F	3/8 inch MNPT by 1/4 inch FNPT Brass Reducer Bushing
HRB-8M6F	1/2 inch MNPT by 3/8 inch FNPT Brass Reducer Bushing
HRB-12M6F	3/4 inch MNPT by 3/8 inch FNPT Brass Reducer Bushing
HRB-12M8F	3/4 inch MNPT by 1/2 inch FNPT Brass Reducer Bushing
HRB-16M12F	1 Inch MNPT By 3/4 FNPT Brass Reducer Bushing
HRB-16M6F	1 Inch MNPT By 3/8 FNPT Brass Reducer Bushing
HRB-16M8F	1 Inch MNPT By 1/2 FNPT Brass Reducer Bushing

BHFT SERIES



The BHFT Series is a multi-barbed Brass Tee Adapter with female NPT threads to barbs. FNPT thread sizes are: 1/8 inch, 1/4 inch, and 3/8 inch. Barb sizes are 1/4 inch, 5/16 inch, and 3/8 inch. This series is in Barstock only. Available in Nickel Plate.

SKU	Description
BHFT-2F4B	1/8 inch FNPT by 1/4 inch Brass Multi-Barbed Tee Adapter
BHFT-2F5B	1/8 inch FNPT by 5/16 inch Brass Multi-Barbed Tee Adapter
BHFT-2F6B	1/8 inch FNPT by 3/8 inch Brass Multi-Barbed Tee Adapter
BHFT-4F4B	1/4 inch FNPT by 1/4 inch Brass Multi-Barbed Tee Adapter
BHFT-4F6B	1/4 inch FNPT by 3/8 inch Brass Multi-Barbed Tee Adapter
BHFT-6F6B	3/8 inch FNPT by 3/8 inch Brass Multi-Barbed Tee Adapter



BSTE SERIES

The BSTE Series are 90° Brass Street Elbows, available as both forged and bar stock. The bar stock fitting is available in a short version. The forged is available as a reducer. Available MNPT and FNPT thread sizes are 1/8 inch, 1/4 inch, 3/8 inch, 1/2 inch, and 3/4 inch. The temperature range is -65° F to 250° F. The operating pressure is 1200 psi. They can be used for grease, fuels, refrigeration, and hydraulic applications. They meet ASA, ASME, and SAE specifications.


SKU	Description
BSTE-2-S-NP	1/8 inch NPT Nickel Plated Short Street Elbow
BSTE-2	1/8 inch MNPT by 1/8 inch FNPT Brass Street Elbow
BSTE-4	1/4 inch MNPT by 1/4 inch FNPT Brass Street Elbow
BSTE-6	3/8 inch MNPT by 3/8 inch FNPT Brass Street Elbow
BSTE-8	1/2 inch MNPT by 1/2 inch FNPT Brass Street Elbow
BSTE-12	3/4 inch MNPT by 3/4 inch FNPT Brass Street Elbow
BSTE-2M4F	1/8 inch MNPT by 1/4 inch FNPT Brass Street Elbow
BSTE-4M6F	1/4 inch MNPT by 3/8 inch FNPT Brass Street Elbow
BSTE-4M2F	1/4 inch MNPT by 1/8 inch FNPT Brass Street Elbow Reducer



SAFGB SERIES

316 Stainless Steel garden hose Adapter, barbed. Barb sizes are 1/2", 5/8", and 3/4".

SKU	Description
SAFGB-8B	3/4 inch FGH by 1/2 inch 316 Stainless Steel Multi-Barbed Garden Hose Adapter
SAFGB-10B	3/4 inch FGH by 5/8 inch 316 Stainless Steel Multi-Barbed Garden Hose Adapter
SAFGB-12B	3/4 inch FGH by 3/4 inch 316 Stainless Steel Multi-Barbed Garden Hose Adapter

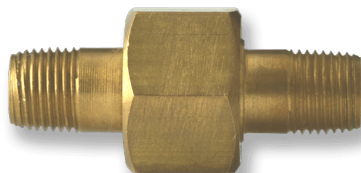

BXU SERIES

The BXU Series is a Brass male Union. Available male NPT thread sizes are 1/8 inch, 1/4 inch, 3/8 inch, and 1/2 inch. One end of this union is solid with hex nut, the other end can be removed.

SKU	Description
BXU-2	1/8 inch MNPT Brass Union
BXU-4	1/4 inch MNPT Brass Union
BXU-6	3/8 inch MNPT Brass Union
BXU-8	1/2 inch MNPT Brass Union

FXF SERIES



The FXF Series is a Brass female-by-female union. The brass fittings are available in four sizes, the nickel plated in five sizes, as noted below. The maximum operating pressure is 1200 psi and the working temperature range is -65° F to 250° F.

SKU	Description
FXF-2	1/8 inch FNPT by 1/8 inch FNPT Brass Union
FXF-4	1/4 inch FNPT by 1/4 inch FNPT Brass Union
FXF-6	3/8 inch FNPT by 3/8 inch FNPT Brass Union
FXF-8	1/2 inch FNPT by 1/2 inch FNPT Brass Union
FXF-12	3/4 inch FNPT by 3/4 inch FNPT Nickel Plated Union

BBX SERIES



This series of Brass connectors is composed of straight connectors, elbows, tees, and crosses. The working temperature range is -40° F to 160° F. The straights, tees, and crosses have equal barb sizes. The elbows are both equal and reducing. These fittings are designed for use with hose clamps.

SKU	Description
BBX-4	1/4 inch Brass Multi-Barbed Cross Connector
BBX-5	5/16 inch Brass Multi-Barbed Cross Connector
BBX-6	3/8 inch Brass Multi-Barbed Cross Connector



SSSES SERIES

The SSSES Series are 304 Stainless Steel 90° elbow hose barb splicer fittings. These elbows are intended to be used with hose clamps or similar clamps. Working temperatures are from -40° F to +160° F. Maximum working pressure is 150 psi. Available in barb sizes of 1/4 inch and 3/8 inch.

SKU	Description
SSSES-4B4B	1/4 Barb by 1/4 Barb 304 Stainless Steel 90° Elbow
SSSES-6B6B	3/8 Barb by 3/8 Barb 304 Stainless Steel 90° Elbow



SAMGM SERIES

The SAMGM series is a Male Garden Hose by MNPT Adapter. It is machined 303 Stainless Steel and is available in 1/2 inch and 3/4 inch MNPT.

SKU	Description
SAMGM-12M	MGH by 3/4 NPT 316 Stainless Fitting
SAMGM-8M	MGH by 1/2 NPT 316 Stainless Fitting

FGFGS SERIES



The FGFGS series is a Brass FGHT by FGHT swivel connector. A non-swivel option is available.

SKU	Description
FGFGS	FGHT by FGHT Swivel Connector

FGC SERIES



Brass female garden hose by Compression Adapter. Available in 3/4" by 1/4" and 3/4" by 3/8".

SKU	Description
FGC-14C	3/4 inch FGHT by 1/4 inch OD Tubing Compression Brass Adapter
FGC-38C	3/4 inch FGHT by 3/8 inch OD Tubing Compression Brass Adapter



FGMPLS SERIES

Brass female garden hose with a long nipple and swivel. 1/4", 3/8" and 1/2".

SKU	Description
FGMPLS-14M	FGHT by 1/4 NPT Long
FGMPLS-38M	FGHT by 3/8 NPT Long
FGMPLS-12M	FGHT by 1/2 NPT Long



SSBT SERIES

303 Stainless Steel barbed Tee connector for beverage service.

SKU	Description
SSBT-4B	1/4 Barb by 1/4 Barb by 1/4 Barb 303 Stainless Tee
SSBT-6B	3/8 Barb by 3/8 Barb by 3/8 Barb 303 Stainless Tee

SKB SERIES



The SKB Series are machined 316 Stainless Steel multi-barbed adapters. Comes in various combinations of sizes ranging from 1/8 inch to 3/4 inch. Some sizes are available in BSPT (listed). The maximum working pressure is 150 psi and the working temperature range is -40° F to 350° F.

SKU	Description
SKB-2M2B-316	1/8 inch MNPT by 1/8 inch Barbed 316 Stainless Steel Adapter
SKB-2M3B-316	1/8 inch MNPT by 3/16 inch Barbed 316 Stainless Steel Adapter
SKB-2M4B-316	1/8 inch MNPT by 1/4 inch Barbed 316 Stainless Steel Adapter (BSPT Available)
SKB-2M5B-316	1/8 inch MNPT by 5/16 inch Barbed 316 Stainless Steel Adapter
SKB-2M6B-316	1/8 inch MNPT by 3/8 inch Barbed 316 Stainless Steel Adapter
SKB-4M3B-316	1/4 inch MNPT by 1/8 inch Barbed 316 Stainless Steel Adapter
SKB-4M4B-316	1/4 inch MNPT by 1/4 inch Barbed 316 Stainless Steel Adapter (BSPT Available)
SKB-4M5B-316	1/4 inch MNPT by 5/16 inch Barbed 316 Stainless Steel Adapter
SKB-4M6B-316	1/4 inch MNPT by 3/8 inch Barbed 316 Stainless Steel Adapter (BSPT Available)
SKB-4M8B-316	1/4 inch MNPT by 1/2 inch Barbed 316 Stainless Steel Adapter
SKB-6M4B-316	3/8 inch MNPT by 1/4 inch Barbed 316 Stainless Steel Adapter
SKB-6M5B-316	3/8 inch MNPT by 5/16 inch Barbed 316 Stainless Steel Adapter
SKB-6M6B-316	3/8 inch MNPT by 3/8 inch Barbed 316 Stainless Steel Adapter (BSPT Available)
SKB-6M8B-316	3/8 inch MNPT by 1/2 inch Barbed 316 Stainless Steel Adapter (BSPT Available)
SKB-6M10B-316	3/8 inch MNPT by 5/8 inch Barbed 316 Stainless Steel Adapter
SKB-8M6B-316	1/2 inch MNPT by 3/8 inch Barbed 316 Stainless Steel Adapter (BSPT Available)
SKB-8M8B-316	1/2 inch MNPT by 1/2 inch Barbed 316 Stainless Steel Adapter (BSPT Available)
SKB-8M10B-316	1/2 inch MNPT by 5/8 inch Barbed 316 Stainless Steel Adapter
SKB-8M12B-316	1/2 inch MNPT by 3/4 inch Barbed 316 Stainless Steel Adapter (BSPT Available)
SKB-12M8B-316	3/4 inch MNPT by 1/2 inch Barbed 316 Stainless Steel Adapter
SKB-12M10B-316	3/4 inch MNPT by 5/8 inch Barbed 316 Stainless Steel Adapter
SKB-12M12B-316	3/4 inch MNPT by 3/4 inch Barbed 316 Stainless Steel Adapter

RV SERIES



The RV Series inline Strainer filter is made of a flexible PVC housing with a 304 Stainless Steel 40 mesh screen (standard). Some sizes also have 20, 80, and 100 mesh screens available. This series comes in FNPT threads of 1/4 inch, 3/8 inch, 1/2 inch, 3/4 inch, and 1 inch. The maximum operating temperature is 160° F. Made for male pipe threads.

SKU	Description
RV-4F-20	1/4 inch FNPT 304 Stainless Steel Screen 20 Mesh PVC Filter
RV-4F-40	1/4 inch FNPT 304 Stainless Steel Screen 40 Mesh PVC Filter
RV-4F-80	1/4 inch FNPT 304 Stainless Steel Screen 80 Mesh PVC Filter
RV-6F-40	3/8 inch FNPT 304 Stainless Steel Screen 40 Mesh PVC Filter
RV-8F-80	1/2 FNPT PVC 304 Screen 80 Mesh
RV-8F	1/2 FNPT 40
RV-12F	3/4 FNPT 40
RV-1F	1 inch FNPT 40

DC SERIES



The DC Series Brass bite-style multi-barb male connector comes in barb sizes of 5/32 inch, 1/4 inch, 3/8 inch, and 1/2 inch for ID tube sizes of .096 inch, .170 inch, .250 inch, and .375 inch. Also available in a reducer connector. The barb sizes for the reducer connector are 1/4 inch by 5/32 inch, 1/4 inch by 3/8 inch, 1/4 inch by 1/2 inch, and 3/8 inch by 1/2 inch for ID tube sizes of .096 inch, .170 inch, .250 inch, and .375 inch. Working temperatures are from -65° F to 90° F. The maximum working pressure is 150 psi. Made for Polyethylene tubing.

SKU	Description
DC-332	3/32 inch Bite-Style Multi-Barbed Brass Connector
DC-250	1/4 inch Bite-Style Multi-Barbed Brass Connector
DC-375	3/8 inch Bite-Style Multi-Barbed Brass Connector
DC-170	.170 inch Bite-Style Multi-Barbed Brass Connector
DC-375250	.375 inch by .250 inch Bite-Style Multi-Barbed Brass Connector
DC-375170	.375 inch by .170 inch Bite-Style Multi-Barbed Brass Connector

SKU	Description
DC-250170	.250 inch by .170 inch Bite-Style Multi-Barbed Brass Connector
DC-170332	.170 inch by 3/32 inch Bite-Style Multi-Barbed Brass Connector



ATTS SERIES

The ATTS Series is a Bronze muffler with a Brass body. This muffler is for cylinders, gear-boxes, or storage vessels. Available in 10-32 Male UNF threads and 1/16 inch, 1/8 inch, 1/4 inch, 3/8 inch, 1/2 inch, 3/4 inch, and 1 inch MNPT threads. The filter element is sintered Bronze with a standard of 40 microns, but 10 and 90 micron elements are available. The maximum operating pressure for the sintered Bronze muffler is 300 psi and the working temperature is 35°F to 300°F.

This series is also available in a 303 Stainless Steel body and 316 Stainless Steel element with thread sizes from 1/8 inch to 1 inch MNPT. The maximum operating pressure for the Stainless Steel muffler is 300 psi and the working temperature is 35°F to 392°F.

SKU	Description
ATTS-2F	1/8 inch FNPT 40 Micron Bronze Filter Brass Muffler
ATTS-2M	1/8 inch MNPT 40 Micron Bronze Filter Brass Muffler
ATTS-2M-SS	1/8 inch MNPT 70 Micron Stainless Steel Filter Muffler
ATTS-4M	1/4 inch MNPT 40 Micron Bronze Filter Brass Muffler
ATTS-4M-SS	1/4 inch MNPT 70 Micron Stainless Steel Filter Muffler
ATTS-6M	3/8 inch MNPT 40 Micron Bronze Filter Brass Muffler
ATTS-6M-SS	3/8 inch MNPT 70 Micron Stainless Steel Filter Muffler
ATTS-8M	1/2 inch MNPT 40 Micron Bronze Filter Brass Muffler
ATTS-8M-SS	1/2 inch MNPT 70 Micron Stainless Steel Filter Muffler
ATTS-10	10-32 Male UNF 40 Micron Bronze Filter Brass Muffler
ATTS-10-90	10-32 Male UNF 90 Micron Bronze Filter Brass Muffler
ATTS-12M	3/4 inch MNPT 40 Micron Bronze Filter Brass Muffler
ATTS-12M-SS	3/4 inch MNPT 70 Micron Stainless Steel Filter Muffler
ATTS-16M	1 inch MNPT 40 Micron Bronze Filter Brass Muffler
ATTS-16M-SS	1 inch MNPT 70 Micron Stainless Steel Filter Muffler



ATSM SERIES

The ATSM Series is an adjustable speed Muffler made of Brass with a standard 40-micron sintered Bronze element. The maximum operating pressure is 300 psi for MNPT thread sizes of 1/8 inch, 1/4 inch, 3/8 inch, 1/2 inch, 3/4 inch, and 1 inch, except the 10-32 Male UNF threads. The maximum operating pressure for the 10-32 Male UNF threads is 150 psi. The working temperature range for all sizes is 35° F to 300° F.

This series is also available in 303 Stainless Steel with 316 Stainless Steel, and a 70-micron screen. The Stainless Steel Muffler is available with MNPT threads of 1/8 inch, 1/4 inch, 3/8 inch, 1/2 inch, 3/4 inch, and 1 inch. The maximum pressure is 300 psi and the working temperature range is 35° F to 392° F.

SKU	Description
ATSM-2M	1/8 inch MNPT 40 Micron Brass Adjustable Muffler
ATSM-2M-SS	1/8 inch MNPT 70 Micron Stainless Steel Adjustable Muffler
ATSM-4M	1/4 inch MNPT 40 Micron Brass Adjustable Muffler
ATSM-4M-SS	1/4 inch MNPT 70 Micron Stainless Steel Adjustable Muffler
ATSM-6M	3/8 inch MNPT 40 Micron Brass Adjustable Muffler
ATSM-6M-SS	3/8 inch MNPT 70 Micron Stainless Steel Adjustable Muffler
ATSM-8M	1/2 inch MNPT 40 Micron Brass Adjustable Muffler
ATSM-8M-SS	1/2 MNPT 70 Micron Stainless Steel Adjustable Muffler
ATSM-10	10-32 UNF 40 Micron Brass Adjustable Muffler
ATSM-12M	3/4 inch MNPT 40 Micron Brass Adjustable Muffler
ATSM-12M-SS	3/4 MNPT 70 Micron Stainless Steel Adjustable Muffler
ATSM-16M	1 inch MNPT 40 Micron Brass Adjustable Muffler
ATSM-16M-SS	1 Inch MNPT 70 Micron Stainless Steel Adjustable Muffler

ATBV SERIES



The ATBV Series is a low-profile breather vent used for vacuum relief or pressure equalization for gearboxes or storage vessels. It is available in Brass, Zinc-Plated Steel, and Nickel-Plated Steel. The maximum operating pressure is 150 psi and the temperature range is 35° F to 300° F for all materials. The filter element is sintered Bronze with a standard of 40 microns with 10 and 90 microns available. Male thread sizes range from 10-32 inch UNF to 1-1/2 inch NPT.

***SAE Breather Vents are also available in Brass with a 70-micron sintered Bronze screen. The male thread sizes are 7/16"-20, 9/16"-18, 3/4"-16, 7/8"-14 and 1-1/16"-12. The psi and working temperatures are the same as above.

SKU	Description
ATBV-2M	1/8 inch MNPT Brass Muffler
ATBV-2M-N	1/8 inch MNPT Nickel Plated Brass Muffler Vent
ATBV-2M-SZ	1/8 inch MNPT Zinc Plated Steel Muffler Vent
ATBV-4M	1/4 inch MNPT Brass Muffler
ATBV-6M	3/8 inch MNPT Brass Muffler
ATBV-8M	1/2 inch MNPT Brass Muffler
ATBV-10	10-32 UNF Muffler
ATBV-12M	3/4 inch MNPT Brass Muffler
ATBV-16M	1 inch MNPT Brass Muffler
ATBV-32M-NP/S	2 inch MNPT Nickel Plated Steel Muffler Vent
ATBV-10SAE	Muffler Vent 10 SAE 7/8-14 40 Micron
ATBV-12SAE	1-1/16 -12 SAE Thread Brass Muffler
ATBV-2F	1/8 FNPT Nickel-Plated Steel Breather Vent
ATBV-4F	1/4 FNPT Nickel-Plated Steel Breather Vent
ATBV-4SAE	7/16-20 SAE Thread Brass Muffler
ATVB-6F	3/8 FNPT Nickel-Plated Steel Breather Vent
ATBV-6SAE	9/16-18 SAE Thread 40 Micron Brass Muffler
ATBV-6SAE90	9/16-18 SAE Thread 90 Micron Brass Muffler
ATBV-8F	1/2 FNPT Nickel-Plated Steel Breather Vent
ATBV-8SAE	3/4-16 SAE Thread 40 Micron Brass Muffler



FIA SERIES

The FIA Series Metal Adapter Filters are made of either Brass or Stainless Steel and available in 10-32 inch Female or 10-32 inch Female by Male, 1/8 inch NPT, or 1/4 inch NPT. 304 Stainless Steel screen. 10, 15, 25, or 100-micron screens.

SKU	Description
FIA-2MF-100	1/8 inch Male by Female Brass/ Filter 100 Micron 303
FIA-2MF-15	1/8 inch Male by Female Brass/ Filter 15 Micron 303
FIA-2MF-15-SS	1/8 inch Male by Female Stainless Steel / Filter 15 Micron 303
FIA-4MF-10	1/4 inch Male by 1/4 inch Female Brass with Filter 10 Micron 303
FIA-4MF-100	1/4 inch Male by Female Brass with Filter 100 Micron 303
FIA-1032-SS-15	10-32 Female Stainless Steel 15 Micron
FIA-1032-15	10-32 Female Brass 15 Micron
FIA-4MF-SS-15	1/4 inch FNPT Stainless Steel 15 Micron
FIA-4MF-15	1/4 inch FNPT Brass 15 Micron

EVCK SERIES- ANTI SIPHON VALVE



Our EVCK Series Anti-Siphon Ball Check Valves for gasoline applications. These Brass valves are available 1/4 NPTF by 1/4, 5/16 or 3/8 Barb, 1/4 NPTF by 1/4 or 3/8,

45 % Male Flare, 1/4 NPTF by 1/4 NPTF and 1/4 NPTF by 1/4 NPTF Female. These 1/4 valves offer a 30 GPH flow at -1.5 PSI

The 3/8 NPTF threads offer a flow of 50 GPH at -1.5 PSI. The sizes are 3/8 Male NPTF by 3/8, 1/2 or 5/8 Hose Barb. 3/8 Male NPTF by 3/8 Male Flare 45%, 3/8 NPTF both ends, and a 3/8 Male NPTF by 3/8 NPTF Female threads.

1/2 Inch connections offer a 75 GPH Flow Rate at -1.5 PSI. Sizes are 1/2 Male NPTF by 3/8 or 1/2 Hose Barb or 1/2 Male NPTF both ends that is available only in brass.

Available in Brass or Aluminium (except Flare fittings) with 300 Stainless Steel ball seats, ball and springs.

SKU	Description
EVCK-4M	1/4 inch Male by 1/4 inch Male Ball Check Valve
EVCK-4M4B-B	1/4 inch Male by 1/4 inch Barb Ball Check Valve
EVCK-4M4B-AL	1/4 Inch Male by 1/4 inch Barb Ball Check Valve Aluminum
EVCK-4M5B	1/4 inch Male by 5/16 inch Barb Ball Check Valve
EVCK-4M6B	1/4 inch Male by 3/8 inch Barb Ball Check Valve
EVCK-4M4F	1/4 inch Male by 1/4 inch Female Ball Check Valve
EVCK-6M	3/8 inch Male by 3/8 inch Male Ball Check Valve
EVCK-6M6B	3/8 inch Male by 3/8 inch Barb Ball Check Valve
EVCK-6M8B	3/8 inch Male by 1/2 inch Barb Ball Check Valve
EVCK-6M10B	3/8 inch Male by 5/8 inch Barb Ball Check Valve
EVCK-6M6F	3/8 inch Male by 3/8 inch Female Ball Check Valve
EVCK-8M	1/2 inch Male by 1/2 inch Male Ball Check Valve (brass only)
EVCK-8M6B-AL	1/2 inch Male by 3/8 inch Barb Ball Check Valve (aluminum only)
EVCK-8M8B	1/2 inch Male by 1/2 inch Barb Ball Check Valve (Brass Only)



CMCV SERIES-VALVED COMPRESSION FITTINGS

The CMCV Series Brass Ball Check Valves are compression fittings. This series has Tube OD of 1/8 inch, 1/4 inch, and 3/8 inch. Male NPT thread sizes of 1/8 inch and 1/4 inch are available. In addition, the working pressure for the 1/8 inch tube OD is 400 psi, for the 1/4 inch it is 300 psi, and for the 3/8 inch, it is 200 psi. Furthermore, the temperature range is -65° F to 250°F at maximum operating pressures.

SKU	Description
CMCV-14C2M	1/4 inch by 1/8 inch NPT 3 psi Brass Compression Check Valve
CMCV-18C2M	1/8 inch Brass 3 psi by 1/8 inch NPT Brass Compression Check Valve
CMCV-2M14C	1/8 inch NPT by 1/4 inch Brass S 3 psi Brass Compression Check Valve
CMCV-2M18C	1/8 inch NPT by 1/8 inch Brass 3 psi Brass Compression Check Valve
CMCV-38C4M	3/8 inch Brass 3 psi by 1/4 inch NPT Brass Compression Check Valve
CMCV-4M38C	1/4 inch NPT by 3/8 inch Brass 3 psi Brass Compression Check Valve

CLCV SERIES - BRASS CHECK VALVES



The CLCV Series Brass Check Valves have 10-32 inch ports, a Nitrile seal, and a Stainless Steel spring. It permits flow in only one direction and is used for air and hydraulics. The input psi is 300 maximum. The crack pressure is 1/2 psi and the temperature range is 32° F to 230° F. The 1/8-inch valve has a maximum input pressure of 1000 psi. Otherwise, all other attributes are the same as the 10-32 inch valve.

SKU	Description
CLCV-10F10F	January 6, 1900
CLCV-10F10M	10-32 Female to Male Brass Poppet Check Valve
CLCV-10M10M	10-32 Male to Male Brass Poppet Check Valve
CLCV-10M10F	10-32 Male to Female Brass Poppet Check Valve
CLCV-18F	1/8 inch Female to Female Brass Poppet Check Valve

NCV CHECK VALVE SERIES



The NCV Series Nickel-Plated Brass Poppet Check Valve has options of Buna-N, EPDM or FKM seals. The operating pressure is 0 to 125 psi and the flow rate ranges from 2.5 to 9.5 scfm. Input and output port sizes are 10-32 inch UNF and 1/16 inch Barb.

SKU	Description
NCV-10F10F	10-32 Female to Female Nickel-Plated Poppet Check Valves
NCV-10F10M	10-32 Female to Male Nickel-Plated Poppet Check Valves
NCV-10F1B	10-32 Female 1/16 inch Barb Nickel-Plated Poppet Check Valves
NCV-10M10F	10-32 Male to Female Nickel-Plated Poppet Check Valves
NCV-10M1B	10-32 Male 1/16 inch Barb Nickel-Plated Poppet Check Valves
NCV-1B1B	1/16 inch Barb to 1/16 inch Barb Nickel-Plated Poppet Check Valves

BCV SERIES



The BCV .187 flow thru Series is a Brass Ball Check Valve, with inlet and outlet sizes of 1/4 inch MNPT both ends, 1/4 inch Male Flare both ends, or a 1/4 MNPT to 1/4 FNPT flow only. This Check Valve has no elastomers to create a seal. It will have a positive seal only at high back pressure, so some leakage may bi-pass the seat in low-pressure applications. The cracking pressure on the 302 Stainless Steel spring is 1 psi (standard), 3.7, 5, 10, 14 and 18 psi. Maximum operating pressure is 2500 psi and the maximum operating temperature is 250° F.

The .280 flow thru series is available in 1/4 or 3/8 inch Male and Female NPT threads, and sealing materials are Buna, EPDM or Fluoroelastomer. The cracking pressure on the 302 Stainless Steel spring is 1/2 psi, 1 (standard), 3, 6, 10, 30, 40, 55 and 70 psi. The maximum operating pressure is 3000 psi and the maximum operating temperature is 250° F for Buna seals. These Check Valves are designed for high press applications up to 3000 PSI.

SKU	Description
BCV-14F	1/4 inch FNPT by 1/4 inch FNPT Ball Check Valve
BCV-14FM	1/4 inch FNPT by 1/4 inch MNPT Ball Check Valve
BCV-14M	1/4 inch MNPT by 1/4 inch MNPT Ball Check Valve
BCV-14MF	1/4 inch MNPT by 1/4 inch FNPT Ball Check Valve
BCV-38F	3/8 inch FNPT by 3/8 inch FNPT Ball Check Valve
BCV-38M	3/8 inch MNPT by 3/8 inch MNPT Ball Check Valve

PPCV SERIES



The PPCV Series Brass Poppet Check Valve has inlet sizes of 1/8, 1/4 inch, 3/8 inch, 1/2 inch, and 3/4 inch Female NPT threads and 3/8 inch and 1/2 inch Male NPT threads. Outlet sizes are 1/4 inch, 3/8 inch, 1/2 inch, and 3/4 inch, 1 Inch Female NPT threads. End body options are 1/4 inch and 3/8 inch Male Flare, and 1/4 inch Female Flare. Seal options are Buna-N, EPDM and Viton®. The cracking pressure on the 302 Stainless Steel spring is 1 psi (standard). Maximum operating pressure is 500 PSI for the 1/8 size and 1200 PSI for all the other sizes. The maximum operating temperature is 180° F. Two sizes of valves, the 3/8 FNPT and the 1-inch FNPT are available in 303 stainless.

SKU	Description
PPCV-18M	1/8 inch MNPT Brass Poppet Check Valve
PPCV-14MFL	1/4 Male Flare to 1/4 Male Flare Brass Poppet Check Valve
PPCV-18M14MFL	1/8 inch MNPT to 1/4 Male Flare Brass Poppet Check Valve
PPCV-14MFL18M	1/4 Male Flare to 1/8 MNPT Brass Poppet Check Valve
PPCV-14MFL18M-NP	1/4 Male Flare to 1/8 MNPT Nickel Plated Brass Poppet Check Valve
PPCV-14F	1/4 inch Female Brass Poppet Check Valve
PPCV-14F-1-V	1/4 inch Female Brass Poppet Check Valve <1 psi FKM Seals
PPCV-14F14MFL	1/4 FNPT to 1/4 Male Flare Brass Poppet Check Valve
PPCV-38MFL	3/8 Male Flare Brass Poppet Check Valve
PPCV-38MF	3/8 MNPT to 3/8 FNPT Brass Poppet Check Valve
PPCV-38F	3/8 FNPT to 3/8 FNPT Brass Poppet Check Valve
PPCV-12M38F	
PPCV-12F	1/2 inch Female Brass Poppet Check Valve
PPCV-12MF	1/2 inch Male 1/2 inch Female Brass Poppet Check Valve
PPCV-34F	3/4 inch Female Brass Poppet Check Valve
PPCV-34MF	3/4 inch Male 3/4 inch Female Brass Poppet Check Valve


BPCV SERIES



The BPCV Series Brass Piston Check Valves are available in inlet and outlet sizes of 1/4 inch, 1/8 inch, and 3/16 inch barbs. Seal options are Buna-N, EPDM and Viton®. Spring materials are Hastelloy and Stainless Steel but the valve is also available without a spring. The maximum operating pressure is 125 psi. The flow rate is 2.5 SCFM at 50 psi.

SKU	Description
BPCV-2	1/8 inch Barb Brass Piston Check Valve
BPCV-2B-E1	1/8 inch Barb EPDM Piston Check Valve 1 psi
BPCV-5	5/16 Barb Piston Check Valve

PSCV SERIES



The PSCV Series Brass or Stainless Steel Piston Check Valves ensures a positive bubble-tight seal. They have a cracking pressure of 1 psi, a maximum pressure of 500 psi, and a maximum working temperature of 250° F. The standard unit is Brass with a 302 Stainless Steel spring and Steel retainer. Optional springs of 3, 5, 9, 15, 20, 25 psi. Also available in a 316 Stainless Steel body (shown) with a Hastelloy® spring. 1, 3, 15, and 25 psi. Seals available are Buna, EPDM, or FKM.

SKU	Description
PSCV-12F	1/2 FNPT Brass Piston Check Valve with Buna Seal
PSCV-14F	1/4 FNPT Brass Piston Check Valve with Buna Seal
PSCV-14FM	1/4 FNPT 1/4 MNPT Brass Piston Check Valve
PSCV-14M	1/4 MNPT Brass Piston Check Valve
PSCV-18F	1/8 FNPT Brass Piston Check Valve
PSCV-18FM	1/8 FNPT 1/8 MNPT Brass Piston Check Valve
PSCV-18M	1/8 MNPT Brass Piston Check Valve
PSCV-34F	3/4 FNPT Brass Piston Check Valve
PSCV-38F	3/8 FNPT Brass Piston Check Valve
PSCV-38FM	3/8 FNPT 3/8 MNPT Brass Piston Check Valve
PSCV-18F-SS	1/8 FNPT 316 Stainless Steel Piston Check Valve
PSCV-18FM-SS	1/8 FNPT 1/8 MNPT 316 Stainless Steel Piston Check Valve
PSCV-34F-SS	3/4 FNPT 316 Stainless Steel Piston Check Valve



NPRT SERIES

The NPRT Series Brass Rotary Fittings can be used in constant motion or adjustable. Listed stationary or rotating.

SKU	Description
NPRT-2M2M	1/8 MNPT to 1/8 MNPT Brass Rotary Adapter
NPRT-2M4M	1/8 MNPT to 1/4 MNPT Brass Rotary Adapter
NPRT-4M4M	1/4 MNPT to 1/4 MNPT Brass Rotary Adapter
NPRT-6M6M	3/8 MNPT to 3/8 MNPT Brass Rotary Adapter
NPRT-6M8M	3/8 MNPT to 1/2 MNPT Brass Rotary Adapter
NPRT-2M2F	1/8 MNPT to 1/8 FNPT Brass Rotary Adapter
NPRT-2M4F	1/8 MNPT to 1/4 FNPT Brass Rotary Adapter
NPRT-4M4F	1/4 MNPT to 1/4 FNPT Brass Rotary Adapter
NPRT-6M6F	3/8 MNPT to 3/8 FNPT Brass Rotary Adapter
NPRT-6M8F	3/8 MNPT to 1/2 FNPT Brass Rotary Adapter
NPRT-8M8F	1/2 MNPT to 1/2 FNPT Brass Rotary Adapter

186-2 SERIES

186-2 Series is a Brass Barb Fittings are designed to fit .073 holes using a Loctite adhesive.



SKU	Description
186-2	1/16 inch Barbed Brass Bondable Insert

ILA SERIES




The ILA Series is a universal Nickel-Plated Brass connector with 10-32-inch male UNF threads and a 5/16 inch hex. This fitting has an operating pressure of 125 psi. 303 Stainless Steel is optional. Also available as a swivel.

SKU

Description

ILA-10 10-32 inch male UNF Adjustable Nickel-Plated Brass Swivel Connector

AED SERIES



The AED Series are Adjustable 10-32 inch male UNF to barb Brass elbows in 1/16 inch or 1/8 inch single barbs.

SKU

Description

AED-1018	10-32 inch Male UNF by 1/8 inch Barbed Adjustable Elbow
AED-10X1B	10-32 inch Male UNF by 1/16 inch Barbed Adjustable Elbow
AED-10X2B	10-32 inch Male UNF by 1/8 inch Barbed Adjustable Elbow

NAT SERIES



The NAT Series are adjustable Brass Tee adapters that have bite-style barbs. This series adapts from male UNF threads to barbs.

SKU	Description
NAT-10-078B	10-32 inch Male UNF by .078 inch Adjustable Tee
NAT-10-170B	10-32 inch Male UNF by .170 inch Adjustable Tee
NAT-10-1B	10-32 inch Male UNF by 1/16 inch Adjustable Tee
NAT-10-2B	10-32 inch Male UNF by 1/8 inch Adjustable Tee
NAT-10-2B-OS	10-32 inch Male UNF by 1/8 inch Adjustable Tee O-Ring Slot
NAT-10-332B	10-32 inch Male UNF by 3/32 inch inch Adjustable Tee
NAT-10-364B	10-32 inch Male UNF by 3/64 inch Adjustable Tee
NAT-10-3B	10-32 inch Male UNF by 3/16 inch Adjustable Tee
NAT-10-4B	10-32 inch Male UNF by 1/4 inch Adjustable Tee
NAT-10-532B	10-32 inch Male UNF by 5/32 inch Adjustable Tee
NAT-10-564B	10-32 inch Male UNF by 5/64 inch Adjustable Tee
NAT-10-732	10-32 inch Male UNF by 7/32 inch Adjustable Tee
NAT-1428-170B	1/4-28 inch Male UNF by .170 Adjustable Tee
NAT-1428-1B	1/4-28 inch Male UNF by 1/16 inch Adjustable Tee
NAT-1428-2B	1/4-28 inch Male UNF by 1/8 inch Adjustable Tee
NAT-1428-4B-OS	1/4-28 inch Male UNF by 1/4 inch Tee Adjustable O-Ring Slot
NAT-1428-4B-OS-BI	1/4-28 inch Male UNF by 1/4 inch Tee Adjustable Special Port
NAT-1428-332B	1/4-28 inch Male UNF by 3/32 inch inch Adjustable Tee
NAT-1428-532B	1/4-28 inch Male UNF by 5/32 inch Adjustable Tee
NAT-1428-564B	1/4-28 inch Male UNF by 5/64 inch Adjustable Tee
NAT-3M170B	3mm Male by .170 Adjustable Tee
NAT-3M1B	3mm Male by 1/16 inch Adjustable Tee
NAT-3M2B	3mm Male by 1/8 inch Adjustable Tee
NAT-3M332B	3mm Male by 3/32 inch inch Adjustable Tee
NAT-3M364B	3mm Male by 3/64 inch Adjustable Tee
NAT-3M532B	3mm Male by 5/32 inch Adjustable Tee
NAT-3M564B	3mm Male by 5/64 inch Adjustable Tee
NAT-4M170B	4mm Male by .170 Adjustable Tee
NAT-4M1B	4mm Male by 1/16 inch Adjustable Tee
NAT-4M2B	4mm Male by 1/8 inch Adjustable Tee
NAT-4M332B	4mm Male by 3/32 inch inch Adjustable Tee
NAT-4M364B	4mm Male by 3/64 inch Adjustable Tee
NAT-4M3B	4mm Male by 3/16 inch Adjustable Tee
NAT-4M4B	4mm Male by 1/4 inch Adjustable Tee
NAT-4M532B	4mm Male by 5/32 inch Adjustable Tee

SKU	Description
NAT-4M564B	4mm Male by 5/64 inch Adjustable Tee
NAT-4M732B	4mm Male by 7/32 inch Adjustable Tee
NAT-5M170B	5mm Male by .170 Adjustable Tee
NAT-5M1B	5mm Male by 1/16 inch Adjustable Tee
NAT-5M2B	5mm Male by 1/8 inch Adjustable Tee
NAT-5M332B	5mm Male by 3/32 inch inch Adjustable Tee
NAT-5M364B	5mm Male by 3/64 inch Adjustable Tee
NAT-5M3B	5mm Male by 3/16 inch Adjustable Tee
NAT-5M532B	5mm Male by 5/32 inch Adjustable Tee
NAT-5M564B	5mm Male by 5/64 inch Adjustable Tee

MFA SERIES



The MFA Series consists of high-quality Brass female-to-male connectors. They are designed to serve various threading standards including NPT, UNF, and BSPT. These connectors are engineered for durability, making them appropriate for a wide range of industrial applications where secure and leak-proof connections are needed.

SKU	Description
MFA-1010	10-32 inch Female UNF by 10-32 inch Male UNF Pipe Connector
MFA-1010EL	10-32 inch Female UNF by 1/2 inch MNPT Pipe Connector
MFA-1010S	10-32 inch Female UNF by 1/4 inch MNPT Pipe Connector
MFA-10F5MM	10-32 inch Female UNF by 5 MM Male Pipe Connector
MFA-1032-1M	10-32 inch Female UNF by 1/16 inch MNPT Pipe Connector
MFA-1032-2M	10-32 inch Female UNF by 1/8 inch MNPT Pipe Connector
MFA-1032-4M	10-32 inch Female UNF by 1/4 inch MNPT Pipe Connector
MFA-18F10M	1/8 inch FNPT by 10-32 inch Male UNF Pipe Connector
MFA-18F5MM	1/8 inch FNPT by 5 MM Male Pipe Connector
MFA-1F2M	1/16 inch FNPT by 1/8 inch MNPT Pipe Connector
MFA-1F4M	1/16 inch FNPT by 1/4 inch MNPT Pipe Connector
MFA-4F4M	1/8 inch FNPT by 1/8 inch MNPT Pipe Connector
MFA-4F2M	1/4 inch FNPT by 1/8 inch MNPT Pipe Connector
MFA-4F4M	1/4 inch FNPT by 1/4 inch MNPT Pipe Connector
MFA-4F3MM	1/4 inch FNPT by 3 MM Male Pipe Connector
MFA-4F5MM	1/4 inch FNPT by 5 MM Male Pipe Connector
MFA-4F6MM	1/4 inch FNPT by 6 MM Male Pipe Connector


SKU	Description
MFA-3M-1032M	3 MM Female by 10-32 inch Male UNF Pipe Connector
MFA-3M-1428M	3 MM Female by 1/4-28 inch Male UNF Pipe Connector
MFA-3M-1M	3 MM Female by 1/16 inch MNPT Pipe Connector
MFA-3M-2M	3 MM Female by 1/8 inch MNPT Pipe Connector
MFA-3M-4M	3 MM Female by 1/4 inch MNPT Pipe Connector
MFA-3M-M3M	3 MM Female by 3 MM Male Pipe Connector
MFA-3M-M5M	3 MM Female by 5 MM Male Pipe Connector
MFA-3M-M6M	3 MM Female by 6 MM Male Pipe Connector
MFA-3M-M8M	3 MM Female by 8 MM Male Pipe Connector
MFA-5M-1032M	5 MM Female by 10-32 inch Male UNF Pipe Connector
MFA-5M-1428M	5 MM Female by 1/4-28 inch Male UNF Pipe Connector
MFA-5M-1M	5 MM Female by 1/16 inch MNPT Pipe Connector
MFA-5M-2M	5 MM Female by 1/8 inch MNPT Pipe Connector
MFA-5M-4M	5 MM Female by 1/4 inch MNPT Pipe Connector
MFA-5M-M3M	5 MM Female by 3 MM Male Pipe Connector
MFA-5M-M5M	5 MM Female by 5 MM Male Pipe Connector
MFA-5M-M6M	5 MM Female by 6 MM Male Pipe Connector
MFA-6M-1032M	6 MM Female by 10-32 inch Male UNF Pipe Connector
MFA-6M-1428M	6 MM Female by 1/4-28 inch Male UNF Pipe Connector
MFA-6M-1M	6 MM Female by 1/16 inch MNPT Pipe Connector
MFA-6M-4M	6 MM Female by 1/4 inch MNPT Pipe Connector
MFA-6M-M3M	6 MM Female by 3 MM Male Pipe Connector
MFA-6M-M5M	6 MM Female by 5 MM Male Pipe Connector
MFA-6M-M6M	6 MM Female by 6 MM Male Pipe Connector
MFA-6M-M8M	6 MM Female by 8 MM Male Pipe Connector
MFA-8M-1032M	8 MM Female by 10-32 inch Male UNF Pipe Connector
MFA-8M-1M	8 MM Female by 1/16 inch MNPT Pipe Connector
MFA-8M-4M	8 MM Female by 1/4 inch MNPT Pipe Connector
MFA-8M-M3M	9 MM Female by 3 MM Male Pipe Connector
MFA-2BSPT-1032M	1/8 inch BSPT Female by 10-32 inch Male UNF Pipe Connector
MFA-2BSPT-4M	1/8 inch BSPT Female by 1/4 inch MNPT Pipe Connector
MFA-2BSPT-M3M	1/8 inch BSPT Female by 3 MM Male Pipe Connector
MFA-4BSPT-1032M	1/4 inch BSPT Female by 10-32 inch Male UNF Pipe Connector
MFA-4BSPT-4M	1/4 inch BSPT Female by 1/4 inch MNPT Pipe Connector



DCP SERIES

The DCP Series is a Brass 10-32 inch male UNF thread to multi-barb adapter. It is available with 2, 3, or 4 barbs. Available barb sizes are 1/16 inch and 1/8 inch ID. This series works well with Polyurethane tubing. The maximum working pressure is 150 psi and the temperature range is -65° F to 90° F.

SKU	Description
DCP-10-2DB	10-32 inch UNF by 1/8 inch Double Barb Brass Adapter
DCP-10-2Q	10-32 inch UNF by Quad 1/8 inch Barb Brass Adapter
DCP-10-2TB	10-32 inch UNF by 1/8 inch Triple Barb Brass Adapter




AEM SERIES

The AEM (formerly NAE) Series are adjustable Brass adapters with bite-style barbs.

SKU	Description
AEM-10-078B	10-32 inch Male UNF by .078 Adjustable Elbow
AEM-10-1B	10-32 inch Male UNF by 1/16 inch Adjustable Elbow
AEM-10-1B-OS	10-32 inch Male UNF by 1/16 inch Adjustable Elbow O-Ring Slotted
AEM-10-2B	10-32 inch Male UNF by 1/8 inch Adjustable Elbow
AEM-10-2B-OS	10-32 inch Male UNF by 1/8 inch Adjustable Elbow O-Ring Slot
AEM-10-332B	10-32 inch Male UNF by 3/32 inch Adjustable Elbow
AEM-10-332B-732 Hex Hgt	10-32 inch Male UNF by 3/32 inch Adjustable Elbow 7/32 inch Hex
AEM-10-332B-170 Hex Hgt	10-32 inch Male UNF by 3/32 inch Adjustable Elbow .170 inch Hex
AEM-10-364B	10-32 inch Male UNF by 3/64 inch Adjustable Elbow
AEM-10-3B	10-32 inch Male UNF by 3/16 inch Adjustable Elbow
AEM-10-532B	10-32 inch Male UNF by 5/32 inch Adjustable Elbow
AEM-10-564B	10-32 inch Male UNF by 5/64 inch Adjustable Elbow

SKU	Description
AEM-10-732	10-32 inch Male UNF by 7/32 inch Adjustable Elbow
AEM-1428-170B	1/4-28 inch Male UNF by .170 inch Adjustable Elbow
AEM-1428-170B-45	1/4-28 inch Male UNF by .170 inch Barb Elbow Adjustable 45°
AEM-1428-1B	1/4-28 inch Male UNF by 1/16 inch Adjustable Elbow
AEM-1428-2B	1/4-28 inch Male UNF by 1/8 inch Adjustable Elbow
AEM-1428-332B	1/4-28 inch Male UNF by 3/32 inch Adjustable Elbow
AEM-1428-364B	1/4-28 inch Male UNF by 3/64 inch Adjustable Elbow
AEM-1428-3B	1/4-28 inch Male UNF by 3/16 inch Adjustable Elbow
AEM-1428-4B	1/4-28 inch Male UNF by 1/4 inch Adjustable Elbow
AEM-1428-4B-O	1/4-28 inch Male UNF by 1/4 inch Adjustable Elbow with O-Ring
AEM-1428-532B	1/4-28 inch Male UNF by 5/32 inch Adjustable Elbow
NAE-1428-564B	1/4-28 inch Male UNF by 5/64 inch Adjustable Elbow
AEM-1428-732B	1/4-28 inch Male UNF by 7/32 inch Adjustable Elbow
AEM-3M170B	3mm Male Adjustable Elbow by .170 Barb
AEM-3M1B	3mm Male Adjustable Elbow by 1/16 inch Barb
AEM-3M2B	3mm Male Adjustable Elbow by 1/8 inch Barb
AEM-3M332B	3mm Male Adjustable Elbow by 3/32 inch Barb
AEM-3M364B	3mm Male Adjustable Elbow by 3/64 inch Barb
AEM-3M532B	3mm Male Adjustable Elbow by 5/32 inch Barb
AEM-3M564B	3mm Male Adjustable Elbow by 5/64 inch Barb
AEM-4M170B	4mm Male Adjustable Elbow by .170 Barb
AEM-4M1B	4mm Male Adjustable Elbow by 1/16 inch Barb
AEM-4M2B	4mm Male Adjustable Elbow by 1/8 inch Barb
AEM-4M332B	4mm Male Adjustable Elbow by 3/32 inch Barb
AEM-4M3B	4mm Male Adjustable Elbow by 3/16 inch Barb
AEM-4M4B	4mm Male Adjustable Elbow by 1/4 inch Barb
AEM-4M532B	4mm Male Adjustable Elbow by 5/32 inch Barb
AEM-4M564B	4mm Male Adjustable Elbow by 5/64 inch Barb
AEM-4M732B	4mm Male Adjustable Elbow by 7/32 inch Barb
AEM-5M170B	5mm Male Adjustable Elbow by .170 Barb
AEM-5M1B	5mm Male Adjustable Elbow by 1/16 inch Barb
AEM-5M2B	5mm Male Adjustable Elbow by 1/8 inch Barb
AEM-5M332B	5mm Male Adjustable Elbow by 3/32 inch Barb
AEM-5M364B	5mm Male Adjustable Elbow by 3/64 inch Barb
AEM-5M3B	5mm Male Adjustable Elbow by 3/16 inch Barb
AEM-5M532B	5mm Male Adjustable Elbow by 5/32 inch Barb
AEM-5M564B	5mm Male Adjustable Elbow by 5/64 inch Barb
AEM-5M732B	5mm Male Adjustable Elbow by 7/32 inch Barb

FEF SERIES



The FEF Series are Brass female-to-female elbow connectors. Shown is a 90° elbow but 45° elbows are available. For the Male version see our [MEF Series](#) line.

SKU	Description
FEF-1032MX1F	10-32 inch Female UNF by 1/16 inch Female 90° Miniature Elbow Adapter
FEF-1032MX2F	10-32 inch Female UNF by 1/8 inch Female 90° Miniature Elbow Adapter
FEF-1032MX4F	10-32 inch Female UNF by 1/4 inch Female 90° Miniature Elbow Adapter
FEF-1032MX3MM	10-32 inch Female UNF by 3MM Female 90° Miniature Elbow Adapter
FEF-1032MX5MM	10-32 inch Female UNF by 5MM Female 90° Miniature Elbow Adapter
FEF-1032MX6MM	10-32 inch Female UNF by 6MM Female 90° Miniature Elbow Adapter
FEF-1032MX8MM	10-32 inch Female UNF by 8MM Female 90° Miniature Elbow Adapter
FEF-1428MX1032F	1/4-28 inch Female UNF by 10-32 Female 90° Miniature Elbow Adapter
FEF-1428MX1F	1/4-28 inch Female UNF by 1/16 inch Female 90° Miniature Elbow Adapter
FEF-1428MX2F	1/4-28 inch Female UNF by 1/8 inch Female 90° Miniature Elbow Adapter
FEF-1428MX4F	1/4-28 inch Female UNF by 1/4 inch Female 90° Miniature Elbow Adapter
FEF-1428MX3MM	1/4-28 inch Female UNF by 3MM Female 90° Miniature Elbow Adapter
FEF-1428MX5MM	1/4-28 inch Female UNF by 5MM Female 90° Miniature Elbow Adapter
FEF-1428MX6MM	1/4-28 inch Female UNF by 6MM Female 90° Miniature Elbow Adapter
FEF-1428MX8MM	1/4-28 inch Female UNF by 8MM Female 90° Miniature Elbow Adapter
FEF-1MX1032F	1/16 inch Female by 10-32 Female 90° Miniature Elbow Adapter
FEF-1MX1428F	1/16 inch Female by 1/4-28 Female 90° Miniature Elbow Adapter
FEF-1MX1F	1/16 inch Female by 1/16 inch Female 90° Miniature Elbow Adapter
FEF-1MX2F	1/16 inch Female by 1/8 inch Female 90° Miniature Elbow Adapter
FEF-1MX4F	1/16 inch Female by 1/4 inch Female 90° Miniature Elbow Adapter
FEF-1MX3MM	1/16 inch Female by 3MM Female 90° Miniature Elbow Adapter

SKU	Description
FEF-1MX5MM	1/16 inch Female by 5MM Female 90° Miniature Elbow Adapter
FEF-1MX6MM	1/16 inch Female by 6MM Female 90° Miniature Elbow Adapter
FEF-1MX8MM	1/16 inch Female by 8MM Female 90° Miniature Elbow Adapter
FEF-2MX1032F	1/8 inch Female by 10-32 Female 90° Miniature Elbow Adapter
FEF-2MX1428F	1/8 inch Female by 1/4-28 Female 90° Miniature Elbow Adapter
FEF-2MX1F	1/8 inch Female by 1/16 inch Female 90° Miniature Elbow Adapter
FEF-2MX2F	1/8 inch Female by 1/8 inch Female 90° Miniature Elbow Adapter
FEF-2MX4F	1/8 inch Female by 1/4 inch Female 90° Miniature Elbow Adapter
FEF-2MX3MM	1/8 inch Female by 3MM Female 90° Miniature Elbow Adapter
FEF-2MX5MM	1/8 inch Female by 5MM Female 90° Miniature Elbow Adapter
FEF-2MX6MM	1/8 inch Female by 6MM Female 90° Miniature Elbow Adapter
FEF-2MX8MM	1/8 inch Female by 8MM Female 90° Miniature Elbow Adapter
FEF-4MX1032F	1/4 inch Female by 10-32 Female 90° Miniature Elbow Adapter
FEF-4MX1428F	1/4 inch Female by 1/4-28 Female 90° Miniature Elbow Adapter
FEF-4MX1F	1/4 inch Female by 1/16 inch Female 90° Miniature Elbow Adapter
FEF-4MX2F	1/4 inch Female by 1/8 inch Female 90° Miniature Elbow Adapter
FEF-4MX4F	1/4 inch Female by 1/4 inch Female 90° Miniature Elbow Adapter
FEF-4MX3MM	1/4 inch Female by 3MM Female 90° Miniature Elbow Adapter
FEF-4MX5MM	1/4 inch Female by 5MM Female 90° Miniature Elbow Adapter
FEF-4MX6MM	1/4 inch Female by 6MM Female 90° Miniature Elbow Adapter
FEF-4MX8MM	1/4 inch Female by 8MM Female 90° Miniature Elbow Adapter
FEF-M3MX1032F	M3 Female by 10-32 Female 90° Miniature Elbow Adapter
FEF-M3MX1428F	M3 Female by 1/4-28 Female 90° Miniature Elbow Adapter
FEF-M3MX1F	M3 Female by 1/16 inch Female 90° Miniature Elbow Adapter
FEF-M3MX2F	M3 Female by 1/8 inch Female 90° Miniature Elbow Adapter
FEF-M3MX4F	M3 Female by 1/4 inch Female 90° Miniature Elbow Adapter
FEF-M3MX3MM	M3 Female by 3MM Female 90° Miniature Elbow Adapter
FEF-M3MX5MM	M3 Female by 5MM Female 90° Miniature Elbow Adapter
FEF-M3MX6MM	M3 Female by 6MM Female 90° Miniature Elbow Adapter
FEF-M3MX8MM	M3 Female by 8MM Female 90° Miniature Elbow Adapter
FEF-M5MX1032F	M5 Female by 10-32 Female 90° Miniature Elbow Adapter
FEF-M5MX1428F	M5 Female by 1/4-28 Female 90° Miniature Elbow Adapter
FEF-M5MX1F	M5 Female by 1/16 inch Female 90° Miniature Elbow Adapter
FEF-M5MX2F	M5 Female by 1/8 inch Female 90° Miniature Elbow Adapter
FEF-M5MX4F	M5 Female by 1/4 inch Female 90° Miniature Elbow Adapter
FEF-M5MX3MM	M5 Female by 3MM Female 90° Miniature Elbow Adapter
FEF-M5MX5MM	M5 Female by 5MM Female 90° Miniature Elbow Adapter
FEF-M5MX6MM	M5 Female by 6MM Female 90° Miniature Elbow Adapter
FEF-M5MX8MM	M5 Female by 8MM Female 90° Miniature Elbow Adapter
FEF-M6MX1032F	M6 Female by 10-32 Female 90° Miniature Elbow Adapter
FEF-M6MX1428F	M6 Female by 1/4-28 Female 90° Miniature Elbow Adapter
FEF-M6MX1F	M6 Female by 1/16 inch Female 90° Miniature Elbow Adapter

SKU	Description
FEF-M6MX2F	M6 Female by 1/8 inch Female 90° Miniature Elbow Adapter
FEF-M6MX4F	M6 Female by 1/4 inch Female 90° Miniature Elbow Adapter
FEF-M6MX3MM	M6 Female by 3MM Female 90° Miniature Elbow Adapter
FEF-M6MX5MM	M6 Female by 5MM Female 90° Miniature Elbow Adapter
FEF-M6MX6MM	M6 Female by 6MM Female 90° Miniature Elbow Adapter
FEF-M6MX8MM	M6 Female by 8MM Female 90° Miniature Elbow Adapter
FEF-M8MX1032F	M8 Female by 10-32 Female 90° Miniature Elbow Adapter
FEF-M8MX1428F	M8 Female by 1/4-28 Female 90° Miniature Elbow Adapter
FEF-M8MX1F	M8 Female by 1/16 inch Female 90° Miniature Elbow Adapter
FEF-M8MX2F	M8 Female by 1/8 inch Female 90° Miniature Elbow Adapter
FEF-M8MX4F	M8 Female by 1/4 inch Female 90° Miniature Elbow Adapter
FEF-M8MX3MM	M8 Female by 3MM Female 90° Miniature Elbow Adapter
FEF-M8MX5MM	M8 Female by 5MM Female 90° Miniature Elbow Adapter
FEF-M8MX6MM	M8 Female by 6MM Female 90° Miniature Elbow Adapter
FEF-M8MX8MM	M8 Female by 8MM Female 90° Miniature Elbow Adapter

MEF SERIES



The MEF Series is a Brass male or female-to-female elbow connector. 90° and 45° elbows are available.

SKU	Description
MEF-1032MX1428F	10-32 inch Male UNF by 1/4-28 inch Female 90° Miniature Elbow
MEF-1032MX1F	10-32 inch Male UNF by 1/16 inch FNPT 90° Miniature Elbow
MEF-1032MX2F	10-32 inch Male UNF by 1/8 inch FNPT 90° Miniature Elbow
MEF-1032MX4F	10-32 inch Male UNF by 1/4 inch FNPT 90° Miniature Elbow
MEF-1032MX3MM	10-32 inch Male UNF by 3MM Female 90° Miniature Elbow
MEF-1032MX5MM	10-32 inch Male UNF by 5MM Female 90° Miniature Elbow
MEF-1032MX6MM	10-32 inch Male UNF by 6MM Female 90° Miniature Elbow
MEF-1032MX8MM	10-32 inch Male UNF by 8MM Female 90° Miniature Elbow
MEF-1428MX1032F	1/4-28 inch Male UNF by 10-32 inch Female UNF 90° Miniature Elbow
MEF-1428MF	1/4-28 inch Male UNF by 1/4-28 inch Female UNF 90° Miniature Elbow
MEF-1428MX1F	1/4-28 inch Male UNF by 1/16 inch FNPT 90° Miniature Elbow
MEF-1428MX2F	1/4-28 inch Male UNF by 1/8 inch FNPT 90° Miniature Elbow
MEF-1428MX4F	1/4-28 inch Male UNF by 1/4 inch FNPT 90° Miniature Elbow

SKU	Description
MEF-1428MX3MM	1/4-28 inch Male UNF by 3 MM Female 90° Miniature Elbow
MEF-1428MX5MM	1/4-28 inch Male UNF by 5 MM Female 90° Miniature Elbow
MEF-1428MX6MM	1/4-28 inch Male UNF by 6 MM Female 90° Miniature Elbow
MEF-1428MX8MM	1/4-28 inch Male UNF by 8 MM Female 90° Miniature Elbow
MEF-1MX1032F	1/16 inch MNPT by 10-32 inch Female UNF 90° Miniature Elbow
MEF-1MX1428F	1/16 inch MNPT by 1/4-28 inch Female UNF 90° Miniature Elbow
MEF-1MX1F	1/16 inch MNPT by 1/16 inch FNPT 90° Miniature Elbow
MEF-1MX2F	1/16 inch MNPT by 1/8 inch FNPT 90° Miniature Elbow
MEF-1MX4F	1/16 inch MNPT by 1/4 inch FNPT 90° Miniature Elbow
MEF-1MX3MM	1/16 inch MNPT by 3 MM Female 90° Miniature Elbow
MEF-1MX5MM	1/16 inch MNPT by 5 MM Female 90° Miniature Elbow
MEF-1MX6MM	1/16 inch MNPT by 6 MM Female 90° Miniature Elbow
MEF-1MX8MM	1/16 inch MNPT by 8 MM Female 90° Miniature Elbow
MEF-2MX1032F	1/8 inch MNPT by 10-32 inch Female UNF 90° Miniature Elbow
MEF-2MX1428F	1/8 inch MNPT by 1/4-28 inch Female UNF 90° Miniature Elbow
MEF-2MX1F	1/8 inch MNPT by 1/16 inch FNPT 90° Miniature Elbow
MEF-2MX2F	1/8 inch MNPT by 1/8 inch FNPT 90° Miniature Elbow
MEF-2MX4F	1/8 inch MNPT by 1/4 inch FNPT 90° Miniature Elbow
MEF-2MX3MM	1/8 inch MNPT by 3 MM Female 90° Miniature Elbow
MEF-2MX5MM	1/8 inch MNPT by 5 MM Female 90° Miniature Elbow
MEF-2MX6MM	1/8 inch MNPT by 6 MM Female 90° Miniature Elbow
MEF-2MX8MM	1/8 inch MNPT by 8 MM Female 90° Miniature Elbow
MEF-4MX1032F	1/4 inch MNPT by 10-32 inch Female UNF 90° Miniature Elbow
MEF-4MX1428F	1/4 inch MNPT by 1/4-28 inch Female UNF 90° Miniature Elbow
MEF-4MX1F	1/4 inch MNPT by 1/16 inch FNPT 90° Miniature Elbow
MEF-4MX2F	1/4 inch MNPT by 1/8 inch FNPT 90° Miniature Elbow
MEF-4MX4F	1/4 inch MNPT by 1/4 inch FNPT 90° Miniature Elbow
MEF-4MX3MM	1/4 inch MNPT by 3 MM Female 90° Miniature Elbow
MEF-4MX5MM	1/4 inch MNPT by 5 MM Female 90° Miniature Elbow
MEF-4MX6MM	1/4 inch MNPT by 6 MM Female 90° Miniature Elbow
MEF-4MX8MM	1/4 inch MNPT by 8 MM Female 90° Miniature Elbow
MEF-6MM10F	6 M Male by 10-32 inch Female UNF 90° Miniature Elbow
MEF-M3MX1032F	3M Male by 10-32 Female UNF 90° Miniature Elbow
MEF-M3MX1428F	3M Male by 1/4-28 Female UNF 90° Miniature Elbow
MEF-M3MX1F	3M Male by 1/16 inch FNPT 90° Miniature Elbow
MEF-M3MX2F	3M Male by 1/8 inch FNPT 90° Miniature Elbow
MEF-M3MX4F	3M Male by 1/4 inch FNPT 90° Miniature Elbow
MEF-M3MX3MM	3M Male by 3MM Female 90° Miniature Elbow
MEF-M3MX5MM	3M Male by 5MM Female 90° Miniature Elbow
MEF-M3MX6MM	3M Male by 6MM Female 90° Miniature Elbow
MEF-M3MX8MM	3M Male by 8MM Female 90° Miniature Elbow
MEF-M5MX1032F	5M Male by 10-32 Female UNF 90° Miniature Elbow
MEF-M5MX1428F	5M Male by 1/4-28 Female UNF 90° Miniature Elbow

SKU	Description
MEF-M5MX1F	5M Male by 1/16 inch FNPT 90° Miniature Elbow
MEF-M5MX2F	5M Male by 1/8 inch FNPT 90° Miniature Elbow
MEF-M5MX4F	5M Male by 1/4 inch FNPT 90° Miniature Elbow
MEF-M5MX3MM	5 M Male by 3 MM Female 90° Miniature Elbow
MEF-M5MX5MM	5 M Male by 5 MM Female 90° Miniature Elbow
MEF-M5MX6MM	5 M Male by 6 MM Female 90° Miniature Elbow
MEF-M5MX8MM	5 M Male by 8 MM Female 90° Miniature Elbow
MEF-M6MX1032F	6 M Male by 10-32 inch Female UNF 90° Miniature Elbow
MEF-M6MX1428F	6 M Male by 1/4-28 inch Female UNF 90° Miniature Elbow
MEF-M6MX1F	6 M Male by 1/16 inch FNPT 90° Miniature Elbow
MEF-M6MX2F	6 M Male by 1/8 inch FNPT 90° Miniature Elbow
MEF-M6MX4F	6 M Male by 1/4 inch FNPT 90° Miniature Elbow
MEF-M6MX3MM	6 M Male by 3 MM Female 90° Miniature Elbow
MEF-M6MX5MM	6 M Male by 5 MM Female 90° Miniature Elbow
MEF-M6MX6MM	6 M Male by 6 MM Female 90° Miniature Elbow
MEF-M6MX8MM	6 M Male by 8 MM Female 90° Miniature Elbow
MEF-M8MX1032F	8 M Male by 10-32 Female UNF 90° Miniature Elbow
MEF-M8MX1428F	8 M Male by 1/4-28 Female UNF 90° Miniature Elbow
MEF-M8MX1F	8 M Male by 1/16 inch FNPT 90° Miniature Elbow
MEF-M8MX2F	8 M Male by 1/8 inch FNPT 90° Miniature Elbow
MEF-M8MX4F	8 M Male by 1/4 inch FNPT 90° Miniature Elbow
MEF-M8MX3MM	8 M Male by 3 MM Female 90° Miniature Elbow
MEF-M8MX5MM	8 M Male by 5 MM Female 90° Miniature Elbow
MEF-M8MX6MM	8 M Male by 6 MM Female 90° Miniature Elbow
MEF-M8MX8MM	8 M Male by 8 MM Female 90° Miniature Elbow

MRB SERIES




The MRB Series is a Brass reducer bushing in Metric, UNF, and NPT thread sizes. Also available in Nickel-Plate. The working pressure for this fitting is 1200 psi and the temperature range is -65° F to 250°F.

SKU	Description
MRB-14M356F	1/4-28 Male by 3-56 Female Brass Reducer Bushing
MRB-14M632F	1/4-28 Male by 6-32 Female Brass Reducer Bushing
MRB-14M832F	1/4-28 Male by 8-32 Female Brass Reducer Bushing
MRB-14M10F	1/4-28 Male by 10-32 Female Brass Reducer Bushing
MRB-1428M10F	1/4-28 Male by 10-32 Female Brass Reducer Bushing
MRB-1M356F	1/16 inch Male by 3-56 Female Brass Reducer Bushing
MRB-1M632F	1/16 inch Male by 6-32 Female Brass Reducer Bushing
MRB-1M832F	1/16 inch Male by 8-32 Female Brass Reducer Bushing
MRB-1M10F	1/16 inch Male by 10-32 Female Brass Reducer Bushing
MRB-1M14F	1/16 inch Male by 1/4-28 Female Brass Reducer Bushing
MRB-2M356F	1/8 inch Male by 3-56 Female Brass Reducer Bushing
MRB-2M632F	1/8 inch Male by 6-32 Female Brass Reducer Bushing
MRB-2M832F	1/8 inch Male by 8-32 Female Brass Reducer Bushing
MRB-2M10F	1/8 inch Male by 10-32 Female Brass Reducer Bushing
MRB-2M14F	1/8 inch Male by 1/4-28 Female Brass Reducer Bushing
MRB-2M1F	1/8 inch Male by 1/16 inch Female Brass Reducer Bushing
MRB-4M356F	1/4 inch Male by 3-56 Female Brass Reducer Bushing
MRB-4M632F	1/4 inch Male by 6-32 Female Brass Reducer Bushing
MRB-4M832F	1/4 inch Male by 8-32 Female Brass Reducer Bushing
MRB-4M10F	1/4 inch Male by 10-32 Female Brass Reducer Bushing
MRB-4M14F	1/4 inch Male by 1/4-28 Female Brass Reducer Bushing
MRB-4M51628F	1/4 inch Male by 5/16-28 Female Brass Reducer Bushing
MRB-4M3824F	1/4 inch Male by 3/8-24 Female Brass Reducer Bushing
MRB-4M1F	1/4 inch Male by 1/16 inch Female Brass Reducer Bushing
MRB-4M2F	1/4 inch Male by 1/8 inch Female Brass Reducer Bushing
MRB-6M10F	3/8 inch Male by 10-32 Female Brass Reducer Bushing
MRB-M5MM3F	M5 Male by M3 Female Brass Reducer Bushing
MRB-M6MM3F	M6 Male by M3 Female Brass Reducer Bushing
MRB-M8M10F	M8 Male by 10-32 Female Brass Reducer Bushing
MRB-M8MM3F	M8 Male by M3 Female Brass Reducer Bushing
MRB-M8MM5F	M8 Male by M5 Female Brass Reducer Bushing
MRB-2M1032F	1/8 inch Male by 10-32 Female Brass Reducer Bushing
MRB-2M1F	1/8 inch Male by 1/16 inch Female Brass Reducer Bushing
MRB-4M1032F	1/4 inch Male by 10-32 Female Brass Reducer Bushing

SKU	Description
MRB-4M1F	1/4 inch Male by 1/16 inch Female Brass Reducer Bushing
MRB-4M2F	1/4 inch Male by 1/8 inch Female Brass Reducer Bushing
MRB-6M1032F	3/8 inch Male by 10-32 Female Brass Reducer Bushing
MRB-6M1F	3/8 inch Male by 1/16 inch Female Brass Reducer Bushing
MRB-6M2F	3/8 inch Male by 1/8 inch Female Brass Reducer Bushing
MRB-6M4F	3/8 inch Male by 1/4 inch Female Brass Reducer Bushing
MRB-8M1032F	1/2 inch Male by 10-32 Female Brass Reducer Bushing
MRB-8M1F	1/2 inch Male by 1/16 inch Female Brass Reducer Bushing
MRB-8M2F	1/2 inch Male by 1/8 inch Female Brass Reducer Bushing
MRB-8M4F	1/2 inch Male by 1/4 inch Female Brass Reducer Bushing
MRB-8M6F	1/2 inch Male by 3/8 inch Female Brass Reducer Bushing

BCX SERIES



The BCX and the BCXR Series are bite-style cross fittings. The BCXR Series is the reduced version of the BCX Series. These crosses have single sharp barbs to securely hold the tubing from slipping or pulling off. They are excellent fittings for use with Polyurethane or Polyethylene tubing. Made in Brass, Nickel-Plated Brass, or 303 Stainless Steel. Available barb sizes range from 1/16 inch to 3/8 inch.

SKU	Description
BCX-078B	.078 inch Barbed Brass Cross
BCX-1.25B	.078 inch Barbed Brass Cross
BCX-170B	.170 inch Barbed Brass Cross
BCX-1B	1/16 inch Barbed Brass Cross
BCX-2B	1/8 inch Barbed Brass Cross
BCX-332B	3/32 inch Barbed Brass Cross
BCX-3B	3/16 inch Barbed Brass Cross
BCX-4B	1/4 inch Barbed Brass Cross
BCX-532B	5/32 inch Barbed Brass Cross
BCX-6B	3/8 inch Barbed Brass Cross
BCXR-3X170B078B	.170 inch by .078 inch Barbed Reducing Brass Cross
BCXR-3X170B1.25B	.170 inch by .078 inch Barbed Reducing Brass Cross
BCXR-3X1B2B	1/16 inch by 1/8 inch Barbed Reducing Brass Cross



BC SERIES

The BC Series are miniature Brass pipe fittings with various configurations of 10-32 inch UNF and 1/4-28 inch UNF male and female threads. These block fittings can be either female-to-female or male-to-female configurations of elbows, crosses, or tees.

SKU	Description
BC-FE-10	10-32 inch Female UNF by 10-32 inch Female UNF Block Elbow Connector
BC-FT-10	10-32 inch Female UNF by 10-32 inch Female UNF Block Tee Connector
BC-FT-14	1/4-28 inch Female UNF by 1/4-28 inch Female UNF Block Tee Connector
BC-FX-10	10-32 inch Female UNF by 10-32 inch Female UNF by 10-32 inch Female UNF Block Cross Connector
BC-MFE-10	10-32 inch Male UNF by 10-32 inch Female UNF Block Elbow Connector
BC-MFT-10	10-32 inch Male UNF by 10-32 inch Female UNF Block Tee Connector
BC-MFT-14	1/4-28 inch Male UNF by 1/4-28 inch Female UNF Block Tee Connector
BC-MFX-10	10-32 inch Male UNF by 10-32 inch Female UNF Block Cross Connector
BC-MFEA	10-32 inch Male UNF by 10-32 inch Female UNF Block Straight Connector



BI SERIES

The BI Series are Brass or 303 Stainless Steel bite-style barb inserts for manifold applications. Available in 1/16 inch, .078 inch, 3/32 inch, 1/8 inch, 5/32 inch, 3/16 inch, 1/4 inch, 5/16 inch, and 3/8 inch.

SKU	Description
BI-78B	0.078 Barbed Insert
BI-332B	3/32 inch Barbed Insert
BI-1B	1/16 inch Barbed Insert
BI-532B	5/32 inch Barbed Insert
BI-2B	1/8 inch Barbed Insert
BI-3B	3/16 inch Barbed Insert
BI-4B	1/4 inch Barbed Insert
BI-5B	5/16 inch Barbed Insert
BI-6B	3/8 inch Barbed Insert

MHN SERIES



The MHN Series is a miniature Brass threaded hex nipple. Available sizes range from 1/8 inch to 8 MM in any configuration. Some sizes are available in Nickel-Plated Brass.

SKU	Description
MHN-1032	10-32 by 10-32 Brass Hex Nipple
MHN-1428	1/4-28 by 1/4-28 Brass Hex Nipple
MHN-1MM	M1 by M1 Brass Hex Nipple
MHN-2MM	M2 by M2 Brass Hex Nipple
MHN-3MM	M3 by M3 Brass Hex Nipple
MHN-5MM	M5 by M5 Brass Hex Nipple
MHN-6MM	M6 by M6 Brass Hex Nipple

HLB SERIES



The HLB Series are Brass hexless 10-32 UNF Connectors available in .170 inch, 1/16 inch, or 1/8 inch barbs.

SKU	Description
HLB-170	10-32 inch UNF by .170 inch Hexless Barb Brass Connector
HLB-16	10-32 inch UNF by 1/16 inch Hexless Barb Brass Connector
HLB-18	10-32 inch UNF by 1/8 inch Hexless Barb Brass Connector



FAE SERIES

The FAE Series are Brass Elbows with female bite-style barbs in 1/8 inch or 1/4 inch to 1/16 inch up to 3/8 inch.

SKU	Description
FAE-2F732B	1/8 inch FNPT by 7/32 inch Barb Brass Elbow Adapter
FAE-2F170B	1/8 inch FNPT by .170 inch Barb Brass Elbow Adapter
FAE-2F078B	1/8 inch FNPT by .078 inch Barb Brass Elbow Adapter
FAE-2F332B	1/8 inch FNPT by 3/32 inch Barb Brass Elbow Adapter
FAE-2F1B	1/8 inch FNPT by 1/16 inch Barb Brass Elbow Adapter
FAE-2F2B	1/8 inch FNPT by 1/8 inch Barb Brass Elbow Adapter
FAE-2F3B	1/8 inch FNPT by 3/16 inch Barb Brass Elbow Adapter
FAE-2F564B	1/8 inch FNPT by 5/64 inch Barb Brass Elbow Adapter
FAE-4F1B	1/4 inch FNPT by 1/16 inch Barb Brass Elbow Adapter
FAE-4F564B	1/4 inch FNPT by 5/64 inch Barb Brass Elbow Adapter
FAE-4F332B	1/4 inch FNPT by 3/32 inch Barb Brass Elbow Adapter
FAE-4F2B	1/4 inch FNPT by 1/8 inch Barb Brass Elbow Adapter
FAE-4F170B	1/4 inch FNPT by .170 inch Barb Brass Elbow Adapter
FAE-4F3B	1/4 inch FNPT by 3/16 inch Barb Brass Elbow Adapter
FAE-4F4B	1/4 inch FNPT by 1/4 inch Barb Brass Elbow Adapter



FAT SERIES

The FAT Series are Brass female adapters with bite-style barbs. Any different Barb size can be placed on any hex. FNPT thread sizes available for this series are 1/8 inch and 1/4 inch. Barb sizes range from 5/64 inch to 3/8 inch.

SKU	Description
FAT-2F1B	1/8 inch FNPT by 1/16 inch Brass Barbed Tee Adapter
FAT-2F564B	1/8 inch FNPT by 5/64 inch Brass Barbed Tee Adapter
FAT-2F2B	1/8 inch FNPT by 1/8 inch Brass Barbed Tee Adapter
FAT-2F170B	1/8 inch FNPT by .170 inch Brass Barbed Tee Adapter

SKU	Description
FAT-2F6B	1/8 inch FNPT by 3/8 inch Brass Barbed Tee Adapter
FAT-4F1B	1/4 inch FNPT by 1/16 inch Brass Barbed Tee Adapter
FAT-4F564B	1/4 inch FNPT by 5/64 inch Brass Barbed Tee Adapter
FAT-4F2B	1/4 inch FNPT by 1/8 inch Brass Barbed Tee Adapter
FAT-4F170B	1/4 inch FNPT by .170 inch Brass Barbed Tee Adapter
FAT-4F6B	1/4 inch FNPT by 3/8 inch Brass Barbed Tee Adapter

FEV SERIES



The FEV Series are Brass female adapters with sharp barbs. The barbs are available at 60°, 90° and 120° on the flats of the hex. Female NPT thread sizes include 1/8 inch, 1/4 inch, and 3/8 inch. Barb sizes range from .170 inch to 1/8 inch.

SKU	Description
FEV120-2F170B	1/8 inch FNPT by .170 Barb 120° Elbow Adapter
FEV120-2F1B	1/8 inch FNPT by 1/16 inch Barb 120° Elbow Adapter
FEV120-2F2B	1/8 inch FNPT by 1/8 inch Barb 120° Elbow Adapter
FEV120-2F332B	1/8 inch FNPT by 3/32 Barb 120° Elbow Adapter
FEV120-2F532B	1/8 inch FNPT by 5/32 inch Barb 120° Elbow Adapter
FEV120-2F564B	1/8 inch FNPT by 5/64 inch Barb 120° Elbow Adapter
FEV120-4F170B	1/4 inch FNPT by .170 Barb 120° Elbow Adapter
FEV120-4F1B	1/4 inch FNPT by 1/16 inch Barb 120° Elbow Adapter
FEV120-4F2B	1/4 inch FNPT by 1/8 inch Barb 120° Elbow Adapter
FEV120-4F332B	1/4 inch FNPT by 3/32 Barb 120° Elbow Adapter
FEV120-4F532B	1/4 inch FNPT by 5/32 inch Barb 120° Elbow Adapter
FEV120-4F564B	1/4 inch FNPT by 5/64 inch Barb 120° Elbow Adapter
FEV120-6F170B	3/8 inch FNPT by .170 Barb 120° Elbow Adapter
FEV120-6F1B	3/8 inch FNPT by 1/16 inch Barb 120° Elbow Adapter
FEV120-6F2B	3/8 inch FNPT by 1/8 inch Barb 120° Elbow Adapter
FEV120-6F332B	3/8 inch FNPT by 3/32 Barb 120° Elbow Adapter
FEV120-6F532B	3/8 inch FNPT by 5/32 inch Barb 120° Elbow Adapter
FEV120-6F564B	3/8 inch FNPT by 5/64 inch Barb 120° Elbow Adapter
FEV60-2F170B	1/8 inch FNPT by .170 Barb 60° Elbow Adapter
FEV60-2F1B	1/8 inch FNPT by 1/16 inch Barb 60° Elbow Adapter
FEV60-2F2B	1/8 inch FNPT by 1/8 inch Barb 60° Elbow Adapter
FEV60-2F332B	1/8 inch FNPT by 3/32 Barb 60° Elbow Adapter

SKU	Description
FEV60-2F532B	1/8 inch FNPT by 5/32 inch Barb 60° Elbow Adapter
FEV60-2F564B	1/8 inch FNPT by 5/64 inch Barb 60° Elbow Adapter
FEV60-4F170B	1/4 inch FNPT by .170 Barb 60° Elbow Adapter
FEV60-4F1B	1/4 inch FNPT by 1/16 inch Barb 60° Elbow Adapter
FEV60-4F2B	1/4 inch FNPT by 1/8 inch Barb 60° Elbow Adapter
FEV60-4F332B	1/4 inch FNPT by 3/32 Barb 60° Elbow Adapter
FEV60-4F532B	1/4 inch FNPT by 5/32 inch Barb 60° Elbow Adapter
FEV60-4F564B	1/4 inch FNPT by 5/64 inch Barb 60° Elbow Adapter
FEV60-6F170B	3/8 inch FNPT by .170 Barb 60° Elbow Adapter
FEV60-6F1B	3/8 inch FNPT by 1/16 inch Barb 60° Elbow Adapter
FEV60-6F2B	3/8 inch FNPT by 1/8 inch Barb 60° Elbow Adapter
FEV60-6F332B	3/8 inch FNPT by 3/32 Barb 60° Elbow Adapter
FEV60-6F532B	3/8 inch FNPT by 5/32 inch Barb 60° Elbow Adapter
FEV60-6F564B	3/8 inch FNPT by 5/64 inch Barb 60° Elbow Adapter
FEV90-2F078B	1/8 inch FNPT by .078 Barb 90° Elbow Adapter
FEV90-2F170B	1/8 inch FNPT by .170 Barb 90° Elbow Adapter
FEV90-2F1B	1/8 inch FNPT by 1/16 inch Barb 90° Elbow Adapter
FEV90-2F2B	1/8 inch FNPT by 1/8 inch Barb 90° Elbow Adapter
FEV90-2F332B	1/8 inch FNPT by 3/32 Barb 90° Elbow Adapter
FEV90-2F3B	1/8 inch FNPT by 3/16 Barb 90° Elbow Adapter
FEV90-2F4B	1/8 inch FNPT by 1/4 inch Barb 90° Elbow Adapter
FEV90-2F532B	1/8 inch FNPT by 5/32 inch Barb 90° Elbow Adapter
FEV90-2F564B	1/8 inch FNPT by 5/64 inch Barb 90° Elbow Adapter
FEV90-2F5B	1/8 inch FNPT by 5/16 inch Barb 90° Elbow Adapter
FEV90-2F6B	1/8 inch FNPT by 3/8 inch Barb 90° Elbow Adapter
FEV90-4F1B	1/4 inch FNPT by 1/16 inch Barb 90° Elbow Adapter
FEV90-4F2B	1/4 inch FNPT by 1/8 inch Barb 90° Elbow Adapter
FEV90-4F332B	1/4 inch FNPT by 3/32 Barb 90° Elbow Adapter
FEV90-4F3B	1/4 inch FNPT by 3/16 Barb 90° Elbow Adapter
FEV90-4F170B	1/4 inch FNPT by .170 Barb 90° Elbow Adapter
FEV90-4F4B	1/4 inch FNPT by 1/4 inch Barb 90° Elbow Adapter
FEV90-4F532B	1/4 inch FNPT by 5/32 inch Barb 90° Elbow Adapter
FEV90-4F564B	1/4 inch FNPT by 5/64 inch Barb 90° Elbow Adapter
FEV90-4F6B	1/4 inch FNPT by 3/8 inch Barb 90° Elbow Adapter
FEV90-6F1B	3/8 inch FNPT by 1/16 inch Barb 90° Elbow Adapter
FEV90-6F2B	3/8 inch FNPT by 1/8 inch Barb 90° Elbow Adapter
FEV90-6F332B	3/8 inch FNPT by 3/32 Barb 90° Elbow Adapter
FEV90-6F3B	3/8 inch FNPT by 3/16 Barb 90° Elbow Adapter
FEV90-6F170B	3/8 inch FNPT by .170 Barb 90° Elbow Adapter
FEV90-6F4B	3/8 inch FNPT by 1/4 inch Barb 90° Elbow Adapter
FEV90-6F532B	3/8 inch FNPT by 5/32 inch Barb 90° Elbow Adapter
FEV90-6F564B	3/8 inch FNPT by 5/64 inch Barb 90° Elbow Adapter
FEV90-6F5B	3/8 inch FNPT by 5/16 inch Barb 90° Elbow Adapter

SKU	Description
FEV90-6F6B	3/8 inch FNPT by 3/8 inch Barb 90° Elbow Adapter

FTM SERIES



The FTM Series are Brass female adapter tees in 1/8 inch or 1/4 inch threads and 1/16 inch to 3/8 inch bite-style barbs.

SKU	Description
FTM-2F732B	1/8 inch FNPT by 7/32 inch Bite Style Barbed Adapter Tee
FTM-2F078B	1/8 inch FNPT by .078 inch Bite Style Barbed Adapter Tee
FTM-2F332B	1/8 inch FNPT by 3/32 inch Bite Style Barbed Adapter Tee
FTM-2F170B	1/8 inch FNPT by .170 inch Bite Style Barbed Adapter Tee
FTM-2F1B	1/8 inch FNPT by 1/16 inch Bite Style Barbed Adapter Tee
FTM-2F2B	1/8 inch FNPT by 1/8 inch Bite Style Barbed Adapter Tee
FTM-2F3B	1/8 inch FNPT by 3/16 inch Bite Style Barbed Adapter Tee
FTM-2F4B	1/8 inch FNPT by 1/4 inch Bite Style Barbed Adapter Tee
FTM-2F564B	1/8 inch FNPT by 5/64 inch Bite Style Barbed Adapter Tee
FTM-4F170B	1/4 inch FNPT by 7/32 inch Bite Style Barbed Adapter Tee
FTM-4F1B	1/4 inch FNPT by 1/16 inch Bite Style Barbed Adapter Tee
FTM-4F2B	1/4 inch FNPT by 1/8 inch Bite Style Barbed Adapter Tee
FTM-4F332B	1/4 inch FNPT by 3/32 inch Bite Style Barbed Adapter Tee
FTM-4F3B	1/4 inch FNPT by 3/16 inch Bite Style Barbed Adapter Tee
FTM-4F4B	1/4 inch FNPT by 1/4 inch Bite Style Barbed Adapter Tee
FTM-4F564B	1/4 inch FNPT by 5/64 inch Bite Style Barbed Adapter Tee
FTM-4F6B	1/4 inch FNPT by 3/8 inch Bite Style Barbed Adapter Tee

FE SERIES



The FE Series are Brass female by bite-style barb adapter elbows at 90° and 45° angles. Female NPT thread sizes available are 1/16 inch, 1/8 inch, 3/8 inch, and 1/4 inch. Barbs come in a wide range of sizes, which are listed below. Also available in 303 Stainless Steel.

SKU	Description
FE-2F078B	1/8 inch FNPT by .078 inch Barb Brass Elbow Adapter
FE-2F332B	1/8 inch FNPT by 3/32 inch Barb Brass Elbow Adapter
FE-2F170B	1/8 inch FNPT by .170 inch Barb Brass Elbow Adapter
FE-2F1B	1/8 inch FNPT by 1/16 inch Barb Brass Elbow Adapter
FE-2F532B	1/8 inch FNPT by 5/32 inch Barb Brass Elbow Adapter
FE-2F2B	1/8 inch FNPT by 1/8 inch Barb Brass Elbow Adapter
FE-2F3B	1/8 inch FNPT by 3/16 inch Barb Brass Elbow Adapter
FE-2F4B	1/8 inch FNPT by 1/4 inch Barb Brass Elbow Adapter
FE-2F564B	1/8 inch FNPT by 5/64 inch Barb Brass Elbow Adapter
FE-2F5B	1/8 inch FNPT by 5/16 inch Barb Brass Elbow Adapter
FE-2F6B	1/8 inch FNPT by 3/8 inch Barb Brass Elbow Adapter
FE-4F1B	1/4 inch FNPT by 1/16 inch Barb Brass Elbow Adapter
FE-4F2B	1/4 inch FNPT by 1/8 inch Barb Brass Elbow Adapter
FE-4F3B	1/4 inch FNPT by 3/16 inch Barb Brass Elbow Adapter
FE-4F4B	1/4 inch FNPT by 1/4 inch Barb Brass Elbow Adapter
FE-4F564B	1/4 inch FNPT by 5/64 inch Barb Brass Elbow Adapter
FE-4F6B	1/4 inch FNPT by 3/8 inch Barb Brass Elbow Adapter
FE-4F732B	1/4 inch FNPT by 7/32 inch Barb Brass Elbow Adapter
FE-4F170B	1/4 inch FNPT by .170 inch Barb Brass Elbow Adapter
FE-6F170B	3/8 inch FNPT by .170 inch Barb Brass Elbow Adapter
FE-6F1B	3/8 inch FNPT by 1/16 inch Barb Brass Elbow Adapter
FE-6F2B	3/8 inch FNPT by 1/8 inch Barb Brass Elbow Adapter
FE-6F332B	3/8 inch FNPT by 3/32 inch Barb Brass Elbow Adapter
FE-6F3B	3/8 inch FNPT by 3/16 inch Barb Brass Elbow Adapter
FE-6F4B	3/8 inch FNPT by 1/4 inch Barb Brass Elbow Adapter
FE-6F532B	3/8 inch FNPT by 5/32 inch Barb Brass Elbow Adapter
FE-6F564B	3/8 inch FNPT by 5/64 inch Barb Brass Elbow Adapter
FE-6F5B	3/8 inch FNPT by 5/16 inch Barb Brass Elbow Adapter
FE-6F6B	3/8 inch FNPT by 3/8 inch Barb Brass Elbow Adapter
FE45-1F170B	1/16 inch FNPT by .170 inch Barb Brass 45° Elbow Adapter
FE45-1F1B	1/16 inch FNPT by 1/16 inch Barb Brass 45° Elbow Adapter
FE45-1F2B	1/16 inch FNPT by 1/8 inch Barb Brass 45° Elbow Adapter
FE45-1F332B	1/16 inch FNPT by 3/32 inch Barb Brass 45° Elbow Adapter

SKU	Description
FE45-1F3B	1/16 inch FNPT by 3/16 inch Barb Brass 45° Elbow Adapter
FE45-1F4B	1/16 inch FNPT by 1/4 inch Barb Brass 45° Elbow Adapter
FE45-1F532B	1/16 inch FNPT by 5/32 inch Barb Brass 45° Elbow Adapter
FE45-1F564B	1/16 inch FNPT by 1/16 inch Barb Brass 45° Elbow Adapter
FE45-1F5B	1/16 inch FNPT by 5/16 inch Barb Brass 45° Elbow Adapter
FE45-1F6B	1/16 inch FNPT by 3/8 inch Barb Brass 45° Elbow Adapter
FE45-1F732B	1/16 inch FNPT by 7/32 inch Barb Brass 45° Elbow Adapter
FE45-1F8B	1/16 inch FNPT by 1/2 inch Barb Brass 45° Elbow Adapter
FE45-2F170B	1/8 inc FNPT by .170 inch Barb Brass 45° Elbow Adapter
FE45-2F1B	1/8 inch FNPT by 1/16 inch Barb Brass 45° Elbow Adapter
FE45-2F2B	1/8 inch FNPT by 1/8 inch Barb Brass 45° Elbow Adapter
FE45-2F332B	1/8 inch FNPT by 3/32 inch Barb Brass 45° Elbow Adapter
FE45-2F3B	1/8 inch FNPT by 3/16 inch Barb Brass 45° Elbow Adapter
FE45-2F4B	1/8 inch FNPT by 1/4 inch Barb Brass 45° Elbow Adapter
FE45-2F532B	1/8 inch FNPT by 5/32 inch Barb Brass 45° Elbow Adapter
FE45-2F564B	1/8 inch FNPT by 5/64 inch Barb Brass 45° Elbow Adapter
FE45-2F5B	1/8 inch FNPT by 5/16 inch Barb Brass 45° Elbow Adapter
FE45-2F6B	1/8 inch FNPT by 3/8 inch Barb Brass 45° Elbow Adapter
FE45-2F732B	1/8 inch FNPT by 7/32 inch Barb Brass 45° Elbow Adapter
FE45-2F8B	1/8 inch FNPT by 1/2 inch Barb Brass 45° Elbow Adapter
FE45-4F170B	1/4 inch FNPT by .170 inch Barb Brass 45° Elbow Adapter
FE45-4F1B	1/4 inch FNPT by 1/16 inch Barb Brass 45° Elbow Adapter
FE45-4F2B	1/4 inch FNPT by 1/8 inch Barb Brass 45° Elbow Adapter
FE45-4F332B	1/4 inch FNPT by 3/32 inch Barb Brass 45° Elbow Adapter
FE45-4F3B	1/4 inch FNPT by 3/16 inch Barb Brass 45° Elbow Adapter
FE45-4F4B	1/4 inch FNPT by 1/4 inch Barb Brass 45° Elbow Adapter
FE45-4F532B	1/4 inch FNPT by 5/32 inch Barb Brass 45° Elbow Adapter
FE45-4F564B	1/4 inch FNPT by 5/64 inch Barb Brass 45° Elbow Adapter
FE45-4F5B	1/4 inch FNPT by 5/16 inch Barb Brass 45° Elbow Adapter
FE45-4F6B	1/4 inch FNPT by 3/8 inch Barb Brass 45° Elbow Adapter
FE45-4F732B	1/4 inch FNPT by 7/32 inch Barb Brass 45° Elbow Adapter
FE45-4F8B	1/4 inch FNPT by 1/2 inch Barb Brass 45° Elbow Adapter
FE45-6F170B	3/8 inch FNPT by .170 inch Barb Brass 45° Elbow Adapter
FE45-6F1B	3/8 inch FNPT by 1/16 inch Barb Brass 45° Elbow Adapter
FE45-6F2B	3/8 inch FNPT by 1/8 inch Barb Brass 45° Elbow Adapter
FE45-6F332B	3/8 inch FNPT by 3/32 inch Barb Brass 45° Elbow Adapter
FE45-6F3B	3/8 inch FNPT by 3/16 inch Barb Brass 45° Elbow Adapter
FE45-6F4B	3/8 inch FNPT by 1/4 inch Barb Brass 45° Elbow Adapter
FE45-6F532B	3/8 inch FNPT by 5/32 inch Barb Brass 45° Elbow Adapter
FE45-6F564B	3/8 inch FNPT by 5/64 inch Barb Brass 45° Elbow Adapter
FE45-6F5B	3/8 inch FNPT by 5/16 inch Barb Brass 45° Elbow Adapter
FE45-6F6B	3/8 inch FNPT by 3/8 inch Barb Brass 45° Elbow Adapter
FE45-6F732B	3/8 inch FNPT by 7/32 inch Barb Brass 45° Elbow Adapter

SKU	Description
FE45-6F8B	3/8 inch FNPT by 1/2 inch Barb Brass 45° Elbow Adapter

FA SERIES



The FA Series is Brass Female NPT by bite-style barb, in sizes ranging from 1/16 inch to 3/8 inch FNPT threads and 3/64 inch to 3/8 inch Barbs. Also available in Nickel Plate, 303 Stainless Steel, and 316 Stainless Steel.

For UNF and SAE Female Threads see FAU Series.

Description	SKU	SKU	SKU	SKU	Description
Female National Pipe Thread by Barb, Brass	FNPT by Barb Brass	Female National Pipe Thread by Barb, Nickel plated Brass	Female National Pipe Thread by Barb, 303 SS	Female National Pipe Thread by Barb, 316 SS	Female National Pipe Thread by Barb, Nickel plated
1/16 FNPT by 3/64 Barb	FA-1F364B	FA-1F364B-NP	FA-1F364B-303	FA-1F364B-SS	1/16 FNPT by 3/64 Barb
1/16 FNPT by 1/16 Barb	FA-1F1B	FA-1F1B-NP	FA-1F1B-303	FA-1F1B-SS	1/16 FNPT by 1/16 Barb
1/16 FNPT by 5/32 Barb, 2MM	FA-1F564B	FA-1F564B-NP	FA-1F564B-303	FA-1F564B-SS	1/16 FNPT by 5/32 Barb, 2MM
1/16 FNPT by 3/32 Barb	FA-1F332B	FA-1F332B-NP	FA-1F332B	FA-1F332B-SS	1/16 FNPT by 3/32 Barb
1/16 FNPT by 1/8 Barb	FA-1F2B	FA-1F2B-NP	FA-1F2B	FA-1F2B-SS	1/16 FNPT by 1/8 Barb
1/16 FNPT by 5/32 Barb, 4MM	FA-1F532B	FA-1F532B-NP	FA-1F532B	FA-1F532B-SS	1/16 FNPT by 5/32 Barb, 4MM
1/16 FNPT by .170 Barb	FA-1F170B	FA-1F170B-NP	FA-1F170B	FA-1F170B-SS	1/16 FNPT by .170 Barb
1/16 FNPT by 3/16 Barb	FA-1F3B	FA-1F3B-NP	FA-1F3B	FA-1F3B-SS	1/16 FNPT by 3/16 Barb
1/16 FNPT by 7/32 Barb	FA-1F732B	FA-1F732B-NP	FA-1F732B	FA-1F732B-SS	1/16 FNPT by 7/32 Barb

Description	SKU	SKU	SKU	SKU	Description
1/16 FNPT by 15/64 Barb, 6MM	FA-1F1564B	FA-1F1564B-NP	FA-1F1564B	FA-1F1564B-SS	1/16 FNPT by 15/64 Barb, 6MM
1/16 FNPT by 1/4 Barb	FA-1F4B	FA-1F4B-NP	FA-1F4B	FA-1F4B-SS	1/16 FNPT by 1/4 Barb
1/16 FNPT by 5/16 Barb, 8MM	FA-1F516B	FA-1F516B-NP	FA-1F516B	FA-1F516B	1/16 FNPT by 5/16 Barb, 8MM
1/16 FNPT by 3/8 Barb	FA-1F6B	FA-1F6B-NP	FA-1F6B	FA-1F6B	1/16 FNPT by 3/8 Barb
1/8 inch FNPT by .Barb	FA-2F078B	FA-2F078B	FA-2F078B	FA-2F078B	1/8 inch FNPT by .Barb
1/8 FNPT by 3/64 Barb	FA-2F364B	FA-2F364B	FA-2F364B	FA-2F364B	1/8 FNPT by 3/64 Barb
1/8 inch FNPT by 1/16 Barb	FA-2F1B	FA-2F1B	FA-2F1B	FA-2F1B	1/8 inch FNPT by 1/16 Barb
1/8 FNPT by 5/64 Barb, 2MM	FA-2F564B	FA-2F564B	FA-2F564B	FA-2F564B	1/8 FNPT by 5/64 Barb, 2MM
1/8 inch FNPT by 3/32 inch Barb	FA-2F332B	FA-2F332B	FA-2F332B	FA-2F332B	1/8 inch FNPT by 3/32 inch Barb
1/8 inch FNPT by 1/8 Barb	FA-2F2B	FA-2F2B	FA-2F2B	FA-2F2B	1/8 inch FNPT by 1/8 Barb
1/8 inch FNPT by 5/32 inch Barb, 4MM	FA-2F532B	FA-2F532B	FA-2F532B	FA-2F532B	1/8 inch FNPT by 5/32 inch Barb, 4MM
1/8 inch FNPT by .170 Barb	FA-2F170B	FA-2F170B	FA-2F170B	FA-2F170B	1/8 inch FNPT by .170 Barb
1/8 inch FNPT by 3/16 inch Barb Brass	FA-2F3B	FA-2F3B	FA-2F3B	FA-2F3B	1/8 inch FNPT by 3/16 inch Barb Brass
1/8 inch FNPT by 7/32 Barb	FA-2F732B	FA-2F732B	FA-2F732B	FA-2F732B	1/8 inch FNPT by 7/32 Barb
1/8 FNPT by 15/64 Barb, 6MM	FA-2F1564B	FA-2F1564B	FA-2F1564B	FA-2F1564B	1/8 FNPT by 15/64 Barb, 6MM
1/8 inch FNPT by 1/4 Barb	FA-2F4B	FA-2F4B	FA-2F4B	FA-2F4B	1/8 inch FNPT by 1/4 Barb

Description	SKU	SKU	SKU	SKU	Description
1/8 inch FNPT by 5/16 Barb, 8MM	FA-2F5B	FA-2F5B	FA-2F5B	FA-2F5B	1/8 inch FNPT by 5/16 Barb, 8MM
1/8 inch FNPT by 3/8 Barb	FA-2F6B	FA-2F6B	FA-2F6B	FA-2F6B	1/8 inch FNPT by 3/8 Barb
1/4 FNPT by 3/64 Barb	FA-4F364B	FA-4F364B	FA-4F364B	FA-4F364B	1/4 FNPT by 3/64 Barb
1/4 inch FNPT by 1/16 Barb	FA-4F1B	FA-4F1B	FA-4F1B	FA-4F1B	1/4 inch FNPT by 1/16 Barb
1/4 inch FNPT by 5/64 Barb, 2MM	FA-4F564B	FA-4F564B	FA-4F564B	FA-4F564B	1/4 inch FNPT by 5/64 Barb, 2MM
1/4 inch FNPT by 1/8 Barb	FA-4F2B	FA-4F2B	FA-4F2B	FA-4F2B	1/4 inch FNPT by 1/8 Barb
1/4 FNPT by 5/32 Barb, 4MM	FA-4F532B	FA-4F532B	FA-4F532B	FA-4F532B	1/4 FNPT by 5/32 Barb, 4MM
1/4 inch FNPT by by .170 Barb	FA-4F170B	FA-4F170B	FA-4F170B	FA-4F170B	1/4 inch FNPT by by .170 Barb
1/4 inch FNPT by 3/16 Barb	FA-4F3B	FA-4F3B	FA-4F3B	FA-4F3B	1/4 inch FNPT by 3/16 Barb
1/4 inch FNPT by 7/32 Barb	FA-4F732B	FA-4F732B	FA-4F732B	FA-4F732B	1/4 inch FNPT by 7/32 Barb
1/4 FNPT by 15/64 Barb, 6MM	FA-4F1564B	FA-4F1564B	FA-4F1564B	FA-4F1564B	1/4 FNPT by 15/64 Barb, 6MM
1/4 inch FNPT by 1/4 Barb	FA-4F4B	FA-4F4B	FA-4F4B	FA-4F4B	1/4 inch FNPT by 1/4 Barb
1/4 FNPT by 5/16 Barb, 8MM	FA-4F5B	FA-4F5B	FA-4F5B	FA-4F5B	1/4 FNPT by 5/16 Barb, 8MM
1/4 inch FNPT by 3/8 Barb	FA-4F6B	FA-4F6B	FA-4F6B	FA-4F6B	1/4 inch FNPT by 3/8 Barb
3/8 FNPT by 3/64 Barb	FA-6F364B	FA-6F364B	FA-6F364B	FA-6F364B	3/8 FNPT by 3/64 Barb
3/8 inch FNPT by 1/16 Barb	FA-6F1B	FA-6F1B	FA-6F1B	FA-6F1B	3/8 inch FNPT by 1/16 Barb

Description	SKU	SKU	SKU	SKU	Description
3/8 inch FNPT by 5/64 Barb, 2MM	FA-6F564B	FA-6F564B	FA-6F564B	FA-6F564B	3/8 inch FNPT by 5/64 Barb, 2MM
3/8 inch FNPT by 3/32 Barb	FA-6F332B	FA-6F332B	FA-6F332B	FA-6F332B	3/8 inch FNPT by 3/32 Barb
3/8 inch FNPT by 1/8 Barb	FA-6F2B	FA-6F2B	FA-6F2B	FA-6F2B	3/8 inch FNPT by 1/8 Barb
3/8 inch FNPT by 5/32 Barb, 4MM	FA-6F532B	FA-6F532B	FA-6F532B	FA-6F532B	3/8 inch FNPT by 5/32 Barb, 4MM
3/8 inch FNPT by .170 Barb	FA-6F170B	FA-6F170B	FA-6F170B	FA-6F170B	3/8 inch FNPT by .170 Barb
3/8 inch FNPT by 3/16 Barb	FA-6F3B	FA-6F3B	FA-6F3B	FA-6F3B	3/8 inch FNPT by 3/16 Barb
3/8 FNPT by 7/32 Barb	FA-6F732B	FA-6F732B	FA-6F732B	FA-6F732B	3/8 FNPT by 7/32 Barb
3/8 FNPT by 15/64 Barb, 6MM	FA-6F1564B	FA-6F1564B	FA-6F1564B	FA-6F1564B	3/8 FNPT by 15/64 Barb, 6MM
3/8 inch FNPT by 1/4 Barb	FA-6F4B	FA-6F4B	FA-6F4B	FA-6F4B	3/8 inch FNPT by 1/4 Barb
3/8 inch FNPT by 5/16 Barb, 8MM	FA-6F5B	FA-6F5B	FA-6F5B	FA-6F5B	3/8 inch FNPT by 5/16 Barb, 8MM
3/8 FNPT by 3/8 Barb	FA-6F6B	FA-6F6B	FA-6F6B	FA-6F6B	3/8 FNPT by 3/8 Barb



MAE SERIES

MAE Series Brass Male Elbow Adapters Barb sizes range from 1/16 inch to 1/4 inch.

SKU	Description
MAE-1M1B	1/16 inch MNPT by 1/16 inch Barbed Adapter
MAE-1M2B	1/16 inch MNPT by 1/8 inch Barbed Adapter
MAE-1M3B	1/16 inch MNPT by 3/16 inch Barbed Adapter
MAE-1M564B	1/16 inch MNPT by 5/64 inch Barbed Adapter
MAE-2M1B	1/8 inch MNPT by 1/16 inch Barbed Adapter
MAE-2M2B	1/8 inch MNPT by 1/8 inch Barbed Adapter
MAE-2M2B-N	1/8 inch MNPT by 1/8 inch Barbed Adapter
MAE-2M3B	1/8 inch MNPT by 3/16 inch Barbed Adapter
MAE-2M4B-2B	1/8 inch MNPT by 1/4 inch Barb by 1/8 inch Barbed Adapter
MAE-2M4B-2B-NP	1/8 inch MNPT by 1/4 inch Barb by 1/8 inch Barbed Adapter
MAE-2M564B	1/8 inch MNPT by 5/64 inch Barbed Adapter
MAE-4M1B	1/4 inch MNPT by 1/16 inch Barbed Adapter
MAE-4M1B2B	1/4 inch MNPT by 1/16 inch Barb by 1/8 inch Barbed Adapter
MAE-4M2B	1/4 inch MNPT by 1/8 inch Barbed Adapter
MAE-4M2B1B	1/4 inch MNPT by 1/8 inch Barb by 1/16 inch Barbed Adapter
MAE-4M332B	1/4 inch MNPT by 3/32 inch Barbed Adapter
MAE-4M3B	1/4 inch MNPT by 3/16 inch Barbed Adapter
MAE-4M564B	1/4 inch MNPT by 5/64 inch Barbed Adapter

MAT SERIES



MAT Series are Brass male Tee adapters with bite-style barb sizes ranging from 1/16 inch to 1/4 inch. Any different barb size can fit on any different hex.

SKU	Description
MAT-2M078B	1/8 inch MNPT by .078 inch Barb Brass Tee Adapter
MAT-2M1B	1/8 inch MNPT by 1/16 inch Barb Brass Tee Adapter
MAT-2M2B	1/8 inch MNPT by 1/8 inch Barb Brass Tee Adapter
MAT-2M332B	1/8 inch MNPT by 3/32 inch Barb Brass Tee Adapter
MAT-2M3B	1/8 inch MNPT by 3/16 inch Barb Brass Tee Adapter
MAT-2M564B	1/8 inch MNPT by 5/64 inch Barb Brass Tee Adapter
MAT-4M078B	1/4 inch MNPT by .078 inch Barb Brass Tee Adapter
MAT-4M1B	1/4 inch MNPT by 1/16 inch Barb Brass Tee Adapter
MAT-4M1B2B2B	1/4 inch MNPT by 1/16 inch by 1/8 inch by 1/8 inch Barb Brass Tee Adapter
MAT-4M2B	1/4 inch MNPT by 1/8 inch Barb Brass Tee Adapter
MAT-4M332B	1/4 inch MNPT by 3/32 inch Barb Brass Tee Adapter
MAT-4M3B	1/4 inch MNPT by 3/16 inch Barb Brass Tee Adapter
MAT-4M532B	1/4 inch MNPT by 5/32 inch Barb Brass Tee Adapter
MAT-4M564B	1/4 inch MNPT by 5/64 inch Barb Brass Tee Adapter
MAT-4M732B	1/4 inch MNPT by 7/32 inch Barb Brass Tee Adapter

MT SERIES



The MT Series are Brass male Tee adapters with bite-style barbs. Available male NPT thread sizes range from 1/16 inch to 1/4 inch and the available barb sizes range from 1/16 inch to 1/2 inch.

SKU	Description
MT-1M078B	1/16 inch MNPT by .078 inch Barb Adapter Tee
MT-1M170B	1/16 inch MNPT by .170 Barb Adapter Tee
MT-1M1B	1/16 inch MNPT by 1/16 inch Barb Adapter Tee
MT-1M2B	1/16 inch MNPT by 1/8 inch Barb Adapter Tee
MT-1M332B	1/16 inch MNPT by 3/32 inch Barb Adapter Tee
MT-1M3B	1/16 inch MNPT by to 3/16 inch Barb Adapter Tee
MT-1M564B	1/16 inch MNPT by 5/64 inch Barb Adapter Tee
MT-1M732B	1/16 inch MNPT by 7/32 inch Barb Adapter Tee
MT-2M078B	1/8 inch MNPT by .078 inch Barb Adapter Tee
MT-2M078B-120	1/8 inch MNPT by .078 inch Barb 120° Adapter Tee
MT-2M078B-60	1/8 inch MNPT by .078 inch Barb 60 Degree Adapter Tee
MT-2M170B	1/8 inch MNPT by .170 inch Barb Adapter Tee
MT-2M1B	1/8 inch MNPT by 1/16 inch Barb Adapter Tee
MT-2M1B-60	1/8 inch MNPT by 1/16 inch Barb 60 Degree Adapter Tee
MT-2M2B	1/8 inch MNPT by 1/8 inch Barb Adapter Tee
MT-2M332B	1/8 inch MNPT by 3/32 inch Barb Adapter Tee
MT-2M3B	1/8 inch MNPT by 3/16 inch Barb Adapter Tee
MT-2M564B	1/8 inch MNPT by 5/64 inch Barb Adapter Tee
MT-2M5B	1/8 inch MNPT by 5/16 inch Barb Adapter Tee
MT-2M6B	1/8 inch MNPT by 3/8 inch Barb Adapter Tee
MT-4M078B	1/4 inch MNPT by .078 inch Barb Adapter Tee
MT-4M170B	1/4 inch MNPT by 7/32 inch Barb Adapter Tee
MT-4M1B	1/4 inch MNPT by 1/16 inch Barb Adapter Tee
MT-4M2B	1/4 inch MNPT by 1/8 inch Barb Adapter Tee
MT-4M2B-60	1/4 inch MNPT by 1/8 inch Barb 60 Degree Adapter Tee
MT-4M332B	1/4 inch MNPT by 3/32 inch Barb Adapter Tee
MT-4M3B	1/4 inch MNPT by 3/16 inch Barb Adapter Tee
MT-4M4B	1/4 inch MNPT by 1/4 inch Barb Adapter Tee
MT-4M532B	1/4 inch MNPT by 5/32 inch Barb Adapter Tee
MT-4M564B	1/4 inch MNPT by 5/64 inch Barb Adapter Tee
MT-4M6B	1/4 inch MNPT by 3/8 inch Barb Adapter Tee
MT-4M732B	1/4 inch MNPT by 7/32 inch Barb Adapter Tee
MT-4M732B-90	1/4 inch MNPT by 7/32 inch Barb 90 Degree Adapter Tee

ME SERIES



ME Series Brass male Elbow adapters with bite-style barbs ranging from 1/16 inch to 1/2 inch at 90° and 45° angles.


SKU	Description
ME-10MM516B	10 by 1 MM by 5/16 inch Barb Brass Elbow Brass
ME-1M078B	1/16 inch Male Brass Elbow by .078 Barb
ME-1M170B	1/16 inch Male Brass Elbow by .170 Barb
ME-1M1B	1/16 inch Male Brass Elbow by 1/16 inch Barb
ME-1M2B	1/16 inch Male Brass Elbow by 1/8 inch Barb
ME-1M332B	1/16 inch Male Brass Elbow to 3/32 inch Barb
ME-1M3B	1/16 inch Male Brass Elbow by 3/16 inch Barb
ME-1M4B	1/16 inch Male Brass Elbow by 1/4 inch Barb
ME-1M532B	1/16 inch Male Brass Elbow by 5/32 inch Barb
ME-1M564B	1/16 inch Male Brass Elbow by 5/64 inch Barb
ME-1M5B	1/16 inch Male Brass Elbow by 5/16 inch Barb
ME-1M6B	1/16 inch Male Brass Elbow by 3/8 inch Barb
ME-1M732B	1/16 inch Male Brass Elbow by 7/32 inch Barb
ME-2M078B	1/8 inch Male Brass Elbow by .078 Barb
ME-2M170B	1/8 inch Male Brass Elbow to .170 Barb
ME-2M1B	1/8 inch Male Brass Elbow by 1/16 inch Barb
ME-2M2B	1/8 inch Male Brass Elbow by 1/8 inch Barb
ME-2M2B-Short	1/8 inch Male Brass Elbow by 1/8 inch Barb Short Threads
ME-2M332B	1/8 inch Male Brass Elbow by 3/32 inch Barb
ME-2M3B	1/8 inch Male Brass Elbow to 3/16 inch Barb
ME-2M4B	1/8 inch Male Brass Elbow by 1/4 inch Barb
ME-2M4BSH	1/8 inch Male Brass Elbow to 1/4 inch Barb Short
ME-2M532B	1/8 inch Male Brass Elbow by 5/32 inch Barb
ME-2M564B	1/8 inch Male Brass Elbow by 5/64 inch Barb
ME-2M5B	1/8 inch Male Brass Elbow to 5/16 inch Barb
ME-2M6B	1/8 inch Male Brass Elbow to 3/8 inch Barb
ME-2M732B	1/8 inch Male Brass Elbow by 7/32 inch Barb
ME3-078B	M3 Metric Brass Elbow .078
ME3-1B	M3 Metric Brass Elbow 1/16 inch
ME3-2B	M3 Metric Brass Elbow 1/8 inch
ME3-332B	M3 Metric Brass Elbow 3/32 inch
ME-4M078B	1/4 inch Male Brass Elbow to .078 Barb

SKU	Description
ME-4M170B	1/4 inch Male Brass Elbow to .170 Barb
ME-4M1B	1/4 inch Male Brass Elbow to 1/16 inch Barb
ME-4M2B	1/4 inch Male Brass Elbow to 1/8 inch Barb
ME-4M2B-Short	1/4 inch Male Brass Elbow to 1/8 inch Barb Short Threads
ME-4M2B-SW	1/4 inch Male Brass Elbow to 1/8 inch Barb Swivel
ME-4M332B	1/4 inch Male Brass Elbow to 3/32 inch Barb
ME-4M3B	1/4 inch Male Brass Elbow to 3/16 inch Barb
ME-4M4B	1/4 inch Male Brass Elbow to 1/4 inch Barb
ME-4M532B	1/4 inch Male Brass Elbow by 5/32 inch Barb
ME-4M564B	1/4 inch Male Brass Elbow by 5/64 inch Barb
ME-4M5B	1/4 inch Male Brass Elbow to 5/16 inch Barb
ME-4M6B	1/4 inch Male Brass Elbow to 3/8 inch Barb
ME-4M732B	1/4 inch Male Brass Elbow by 7/32 inch Barb
ME-4M8B	1/4 inch Male Brass Elbow to 1/2 inch Barb
ME-6M170B	3/8 inch Male Brass Elbow by .170 Barb
ME-6M1B	3/8 inch Male Brass Elbow by 1/16 inch Barb
ME-6M2B	3/8 inch Male Brass Elbow by 1/8 inch Barb
ME-6M2B-SH	3/8 inch Male Brass Elbow to 1/8 inch Barb Short
ME-6M332B	3/8 inch Male Brass Elbow by 3/32 inch Barb
ME-6M3B	3/8 inch Male Brass Elbow by 3/16 inch Barb
ME-6M4B	3/8 inch Male Brass Elbow by 1/4 inch Barb
ME-6M532B	3/8 inch Male Brass Elbow by 5/32 inch Barb
ME-6M564B	3/8 inch Male Brass Elbow by 5/64 inch Barb
ME-6M5B	3/8 inch Male Brass Elbow by 5/16 inch Barb
ME-6M6B	3/8 inch Male Brass Elbow by 3/8 inch Barb
ME-6M732B	3/8 inch Male Brass Elbow by 7/32 inch Barb
ME-8M170B	1/2 inch Male Brass Elbow by .170 Barb
ME-8M1B	1/2 inch Male Brass Elbow by 1/16 inch Barb
ME-8M2B	1/2 inch Male Brass Elbow by 1/8 inch Barb
ME-8M332B	1/2 inch Male Brass Elbow by 3/32 inch Barb
ME-8M3B	1/2 inch Male Brass Elbow by 3/16 inch Barb
ME-8M4B	1/2 inch Male Brass Elbow by 1/4 inch Barb
ME-8M532B	1/2 inch Male Brass Elbow by 5/32 inch Barb
ME-8M564B	1/2 inch Male Brass Elbow by 5/64 inch Barb
ME-8M5B	1/2 inch Male Brass Elbow by 5/16 inch Barb
ME-8M6B	1/2 inch Male Brass Elbow by 3/8 inch Barb
ME-8M732B	1/2 inch Male Brass Elbow by 7/32 inch Barb
ME45-10M1B	10-32 by 1/16 inch Barb 45° Brass Elbow
ME45-10M332B	10-32 by 3/32 inch Barb 45° Brass Elbow
ME45-10M564B	10-32 by 5/64 inch Barb 45° Brass Elbow
ME45-14M170B	1/4-28 by .170 Barb 45° Brass Elbow
ME45-14M1B	1/4-28 by 1/16 inch Barb 45° Brass Elbow
ME45-14M2B	1/4-28 by 1/8 inch Barb 45° Brass Elbow

SKU	Description
ME45-14M332B	1/4-28 by 3/32 inch Barb 45° Brass Elbow
ME45-14M3B	1/4-28 by 3/16 inch Barb 45° Brass Elbow
ME45-14M4B	1/4-28 by 1/4 inch Barb 45° Brass Elbow
ME45-14M532B	1/4-28 by 5/32 inch Barb 45° Brass Elbow
ME45-14M564B	1/4-28 by 5/64 inch Barb 45° Brass Elbow
ME45-14M732B	1/4-28 by 7/32 inch Barb 45° Brass Elbow
ME45-1M170B	1/16 inch by .170 Barb 45° Brass Elbow
ME45-1M1B	1/16 inch by 1/16 inch Barb 45° Brass Elbow
ME45-1M2B	1/16 inch by 1/8 inch Barb 45° Brass Elbow
ME45-1M332B	1/16 inch by 3/32 inch Barb 45° Brass Elbow
ME45-1M3B	1/16 inch by 3/16 inch Barb 45° Brass Elbow
ME45-1M4B	1/16 inch by 1/4 inch Barb 45° Brass Elbow
ME45-1M532B	1/16 inch by 5/32 inch Barb 45° Brass Elbow
ME45-1M564B	1/16 inch by 5/64 inch Barb 45° Brass Elbow
ME45-1M732B	1/16 inch by 7/32 inch Barb 45° Brass Elbow
ME45-2M170B	1/8 inch by .170 Barb 45° Brass Elbow
ME45-2M1B	1/8 inch by 1/16 inch Barb 45° Brass Elbow
ME45-2M2B	1/8 inch by 1/8 inch Barb 45° Brass Elbow
ME45-2M332B	1/8 inch by 3/32 inch Barb 45° Brass Elbow
ME45-2M3B	1/8 inch by 3/16 inch Barb 45° Brass Elbow
ME45-2M4B	1/8 inch by 1/4 inch Barb 45° Brass Elbow
ME45-2M532B	1/8 inch by 5/32 inch Barb 45° Brass Elbow
ME45-2M564B	1/8 inch by 5/64 inch Barb 45° Brass Elbow
ME45-2M5B	1/8 inch by 5/16 inch Barb 45° Brass Elbow
ME45-2M6B	1/8 inch by 3/8 inch Barb 45° Brass Elbow
ME45-2M732B	1/8 inch by 7/32 inch Barb 45° Brass Elbow
ME45-2M8B	1/8 inch by 1/2 inch Barb 45° Brass Elbow
ME45-4M170B	1/4 inch by .170 Barb 45° Brass Elbow
ME45-4M1B	1/4 inch by 1/16 inch Barb 45° Brass Elbow
ME45-4M2B	1/4 inch by 1/8 inch Barb 45° Brass Elbow
ME45-4M332B	1/4 inch by 3/32 inch Barb 45° Brass Elbow
ME45-4M3B	1/4 inch by 3/16 inch Barb 45° Brass Elbow
ME45-4M4B	1/4 inch by 1/4 inch Barb 45° Brass Elbow
ME45-4M532B	1/4 inch by 5/32 inch Barb 45° Brass Elbow
ME45-4M564B	1/4 inch by 5/64 inch Barb 45° Brass Elbow
ME45-4M5B	1/4 inch by 5/16 inch Barb 45° Brass Elbow
ME45-4M6B	1/4 inch by 3/8 inch Barb 45° Brass Elbow
ME45-4M732B	1/4 inch by 7/32 inch Barb 45° Brass Elbow
ME45-4M8B	1/4 inch by 1/2 inch Barb 45° Brass Elbow
ME45-6M170B	3/8 inch by .170 Barb 45° Brass Elbow
ME45-6M1B	3/8 inch by 1/16 inch Barb 45° Brass Elbow
ME45-6M2B	3/8 inch by 1/8 inch Barb 45° Brass Elbow
ME45-6M332B	3/8 inch by 3/32 inch Barb 45° Brass Elbow

SKU	Description
ME45-6M3B	3/8 inch by 3/16 inch Barb 45° Brass Elbow
ME45-6M4B	3/8 inch by 1/4 inch Barb 45° Brass Elbow
ME45-6M532B	3/8 inch by 5/32 inch Barb 45° Brass Elbow
ME45-6M564B	3/8 inch by 5/64 inch Barb 45° Brass Elbow
ME45-6M5B	3/8 inch by 5/16 inch Barb 45° Brass Elbow
ME45-6M6B	3/8 inch by 3/8 inch Barb 45° Brass Elbow
ME45-6M732B	3/8 inch by 7/32 inch Barb 45° Brass Elbow
ME45-6M8B	3/8 inch by 1/2 inch Barb 45° Brass Elbow

BE SERIES



The BE Series Brass 90° Elbow bite-style connectors are fabricated with silver solder that complies with FDA, NSF, and medical grades VT lead-free and cadmium-free solder. Also available in 303 Stainless Steel. Included with the BE series is the BER series, which is the reduced version of the BE series.

SKU	Description
BE-170B	.170 inch Equal 90° Elbow
BE-170B1B	.170 inch by 1/16 inch 90° Elbow
BE-170B564B	.170 inch by 5/64 inch 90° Elbow
BE-170B332B	.170 inch by 3/32 inch 90° Elbow
BE-170B2B	.170 inch by 1/8 inch 90° Elbow
BE-170B532B	.170 inch by 5/32 inch 90° Elbow
BE-1B	1/16 inch Equal 90° Elbow
BE-332B	3/32 inch Equal 90° Elbow
BE-332B1B	3/32 inch by 1/16 inch 90° Elbow
BE-332B564B	3/32 inch by 5/64 inch 90° Elbow
BE-3B	3/16 inch Equal 90° Elbow
BE-3B1B	3/16 inch by 1/16 inch 90° Elbow
BE-3B564B	3/16 inch by 5/64 inch 90° Elbow
BE-3B332B	3/16 inch by 3/32 inch 90° Elbow
BE-3B2B	3/16 inch by 1/8 inch 90° Elbow
BE-3B532B	3/16 inch by 5/32 inch 90° Elbow
BE-3B170B	3/16 inch by .170 inch 90° Elbow
BE-4B	1/4 inch Equal 90° Elbow
BE-4B1B	1/4 inch by 1/16 inch 90° Elbow
BE-4B564B	1/4 inch by 5/64 inch 90° Elbow
BE-4B332B	1/4 inch by 3/32 inch 90° Elbow

SKU	Description
BE-4B2B	1/4 inch by 1/8 inch 90° Elbow
BE-4B532B	1/4 inch by 5/32 inch 90° Elbow
BE-4B170B	1/4 inch by .170 inch 90° Elbow
BE-4B3B	1/4 inch by 3/16 inch 90° Elbow
BE-4B732B	1/4 inch by 7/32 inch 90° Elbow
BE-2B	1/8 inch Equal 90° Elbow
BE-2B1B	1/8 inch by 1/16 inch 90° Elbow
BE-2B564B	1/8 inch by 5/64 inch 90° Elbow
BE-2B332B	1/8 inch by 3/32 inch 90° Elbow
BE-5B	5/16 inch Equal 90° Elbow
BE-5B1B	5/16 inch by 1/16 inch 90° Elbow
BE-5B564B	5/16 inch by 5/64 inch 90° Elbow
BE-5B332B	5/16 inch by 3/32 inch 90° Elbow
BE-5B2B	5/16 inch by 1/8 inch 90° Elbow
BE-5B532B	5/16 inch by 5/32 inch 90° Elbow
BE-5B170B	5/16 inch by .170 inch 90° Elbow
BE-5B3B	5/16 inch by 3/16 inch 90° Elbow
BE-5B732B	5/16 inch by 7/32 inch 90° Elbow
BE-5B4B	5/16 inch by 1/4 inch 90° Elbow
BE-6B	3/8 inch Equal 90° Elbow
BE-6B1B	3/8 inch by 1/16 inch 90° Elbow
BE-6B564B	3/8 inch by 5/64 inch 90° Elbow
BE-6B332B	3/8 inch by 3/32 inch 90° Elbow
BE-6B2B	3/8 inch by 1/8 inch 90° Elbow
BE-6B532B	3/8 inch by 5/32 inch 90° Elbow
BE-6B170B	3/8 inch by .170 inch 90° Elbow
BE-6B3B	3/8 inch by 3/16 inch 90° Elbow
BE-6B732B	3/8 inch by 7/32 inch 90° Elbow
BE-6B4B	3/8 inch by 1/4 inch 90° Elbow
BE-6B5B	3/8 inch by 5/16 inch 90° Elbow
BE-532B	5/32 inch Equal 90° Elbow
BE-532B1B	5/32 inch by 1/16 inch 90° Elbow
BE-532B564B	5/32 inch by 5/64 inch 90° Elbow
BE-532B332B	5/32 inch by 3/32 inch 90° Elbow
BE-532B2B	5/32 inch by 1/8 inch 90° Elbow
BE-564B	5/64 inch Equal 90° Elbow
BE-564B1B	5/64 inch by 1/16 inch 90° Elbow
BE-732B	7/32 inch Equal 90° Elbow
BE-732B1B	7/32 inch by 1/16 inch 90° Elbow
BE-732B564B	7/32 inch by 5/64 inch 90° Elbow
BE-732B332B	7/32 inch by 3/32 inch 90° Elbow
BE-732B2B	7/32 inch by 1/8 inch 90° Elbow
BE-732B532B	7/32 inch by 5/32 inch 90° Elbow

SKU	Description
BE-732B170B	7/32 inch by .170 inch 90° Elbow
BE-732B3B	7/32 inch by 3/16 inch 90° Elbow
BER-170B1B	.170 inch by 1/16 inch 90° Elbow
BER-170B2B	.170 inch by 1/8 inch 90° Elbow
BER-170B332B	.170 inch by 3/32 inch 90° Elbow
BER-170B532B	.170 inch by 5/32 inch 90° Elbow
BER-170B564B	.170 inch by 5/64 inch 90° Elbow
BER-2B1B	1/8 inch by 1/16 inch 90° Elbow
BER-2B332B	1/8 inch by 3/32 inch 90° Elbow
BER-2B564B	1/8 inch by 5/64 inch 90° Elbow
BER-332B1B	3/32 inch by 1/16 inch 90° Elbow
BER-332B564B	3/32 inch by 5/64 inch 90° Elbow
BER-3B170B	3/16 inch by .170 inch 90° Elbow
BER-3B1B	3/16 inch by 1/16 inch 90° Elbow
BER-3B2B	3/16 inch by 1/8 inch 90° Elbow
BER-3B332B	3/16 inch by 3/32 inch 90° Elbow
BER-3B532B	3/16 inch by 5/32 inch 90° Elbow
BER-3B564B	3/16 inch by 5/64 inch 90° Elbow
BER-4B170B	1/4 inch by .170 inch 90° Elbow
BER-4B1B	1/4 inch by 1/16 inch 90° Elbow
BER-4B2B	1/4 inch by 1/8 inch 90° Elbow
BER-4B332B	1/4 inch by 3/32 inch 90° Elbow
BER-4B3B	1/4 inch by 3/16 inch 90° Elbow
BER-4B532B	1/4 inch by 5/32 inch 90° Elbow
BER-4B564B	1/4 inch by 5/64 inch 90° Elbow
BER-4B732B	1/4 inch by 7/32 inch 90° Elbow
BER-532B1B	5/32 inch by 1/16 inch 90° Elbow
BER-532B2B	5/32 inch by 1/8 inch 90° Elbow
BER-532B332B	5/32 inch by 3/32 inch 90° Elbow
BER-532B564B	5/32 inch by 5/64 inch 90° Elbow
BER-564B1B	5/64 inch by 1/16 inch 90° Elbow
BER-5B170B	5/16 inch by .170 inch 90° Elbow
BER-5B1B	5/16 inch by 1/16 inch 90° Elbow
BER-5B2B	5/16 inch by 1/8 inch 90° Elbow
BER-5B332B	5/16 inch by 3/32 inch 90° Elbow
BER-5B3B	5/16 inch by 3/16 inch 90° Elbow
BER-5B4B	5/16 inch by 1/4 inch 90° Elbow
BER-5B532B	5/16 inch by 5/32 inch 90° Elbow
BER-5B564B	5/16 inch by 5/64 inch 90° Elbow
BER-5B732B	5/16 inch by 7/32 inch 90° Elbow
BER-6B170B	3/8 inch by .170 inch 90° Elbow
BER-6B1B	3/8 inch by 1/16 inch 90° Elbow
BER-6B2B	3/8 inch by 1/8 inch 90° Elbow

SKU	Description
BER-6B332B	3/8 inch by 3/32 inch 90° Elbow
BER-6B3B	3/8 inch by 3/16 inch 90° Elbow
BER-6B4B	3/8 inch by 1/4 inch 90° Elbow
BER-6B532B	3/8 inch by 5/32 inch 90° Elbow
BER-6B564B	3/8 inch by 5/64 inch 90° Elbow
BER-6B5B	3/8 inch by 5/16 inch 90° Elbow
BER-6B732B	3/8 inch by 7/32 inch 90° Elbow
BER-732B170B	7/32 inch by .170 inch 90° Elbow
BER-732B1B	7/32 inch by 1/16 inch 90° Elbow
BER-732B2B	7/32 inch by 1/8 inch 90° Elbow
BER-732B332B	7/32 inch by 3/32 inch 90° Elbow
BER-732B3B	7/32 inch by 3/16 inch 90° Elbow
BER-732B532B	7/32 inch by 5/32 inch 90° Elbow
BER-732B564B	7/32 inch by 5/64 inch 90° Elbow
BER-8B332B	1/2 inch by 3/32 inch 90° Elbow

FEU SERIES



The FEU Series is a Brass female UNF thread to bite-style barb elbow. The bite-style barb holds the tubing securely so it will not pull off. Also available in nickel-plated Brass and 303 Stainless Steel.


SKU	Description
FEU-10X078B	10-32 inch Female UNF by .078 inch Brass Adapter
FEU-10X170B	10-32 inch Female UNF by .170 inch Brass Adapter
FEU-10X1B	10-32 inch Female UNF by 1/16 inch Brass Adapter
FEU-10X2B	10-32 inch Female UNF by 1/8 inch Brass Adapter
FEU-10X332B	10-32 inch Female UNF by 3/32 inch Brass Adapter
FEU-10X532B	10-32 inch Female UNF by 5/32 inch Brass Adapter
FEU-10X564BB	10-32 inch Female UNF by 5/64 inch Brass Adapter



FAU SERIES

The FAU Series is a Brass female UNF thread-to-bite-style barb adapter. The bite-style barb holds the tubing securely so it will not pull off. Also available in nickel-plated Brass and 303 Stainless Steel.

SKU	Description
FAU-10X1B	10-32 inch Female UNF by 1/16 inch Brass Barbed Adapter
FAU-10X2B	10-32 inch Female UNF by 1/8 inch Brass Barbed Adapter
FAU-10X332B	10-32 inch Female UNF by 3/32 inch Brass Barbed Adapter
FAU-10X3B	10-32 inch Female UNF by 3/16 inch Brass Barbed Adapter
FAU-10X4B	10-32 inch Female UNF by 1/4 inch Brass Barbed Adapter
FAU-10X532B	10-32 inch Female UNF by 5/32 inch Brass Barbed Adapter
FAU-10X564B	10-32 inch Female UNF by 5/64 inch Brass Barbed Adapter
FAU-10X732B	10-32 inch Female UNF by 7/32 inch Brass Barbed Adapter
FAU-1420-2B	1/4-20 inch Female UNF by 1/8 inch Brass Barbed Adapter
FAU-1420-4B	1/4-20 inch Female UNF by 1/4 inch Brass Barbed Adapter
FAU-10X170B	10-32 inch Female UNF by .170 inch Brass Barbed Adapter



BT SERIES

BT Series fittings are available in Brass, Nickel-Plated Brass, 303 Stainless Steel, and 316 Stainless Steel. Designed for use with Polyurethane or Polyethylene tubing for securely holding the tubing from slipping or pulling off. Available barb sizes range from 1/32 inch to 3/4 inch.

SKU	Description
BT-132B	.031 Brass Tee
BT-364B	3/64, .045 Brass Tee
BT-1B	1/16 inch Brass Tee
BT-564B	.078 2MM, Brass Tee
BT-332B	3/32 inch Brass Tee
BT-2B	1/8 inch Brass Tee
BT-532B	5/32 4MM, Brass Tee
BT-170B	.170 Brass Tee

SKU	Description
BT-3B	3/16 inch Brass Tee
BT-732B	7/32 inch Brass Tee
BT-4B	1/4 inch Brass Tee
BT-5B	5/16, 8 MM Brass Tee
BT-6B	3/8 inch Brass Tee
BT-8B	1/2 inch Brass Tee

BNC SERIES



The BNC Series bite-style fittings are available in Brass, Nickel-Plated Brass, or 303 Stainless Steel. This series is designed to be used with Polyurethane or Polyethylene tubing for securely holding the tubing from slipping or pulling off. Available barb sizes range from 1/16 inch to 3/8 inch. Optional Orifice and Slim Line are available.

SKU	Description
BNC-170B	.170 Brass Connector
BNC-078B	.078 Brass Connector
BNC-332B	3/32 inch Brass Connector
BNC-332B-SL	3/32 inch Brass Connector Slim Line
BNC-1B	1/16 inch Brass Connector
BNC-1B-SL	1/16 inch Brass Connector Slim Line
BNC-2B	1/8 inch Brass Connector
BNC-3B	3/16 inch Brass Connector
BNC-4B	1/4 inch Brass Connector
BNC-532B	5/32 inch Brass Connector
BNC-564B	5/64 inch Brass Connector
BNC-564B-SL	5/64 inch Brass Connector Slim Line
BNC-5B	5/16 inch Brass Connector
BNC-6B	3/8 inch Brass Connector
BNCR-170B-1B	.170 to 1/16 inch Brass Reducer
BNCR-170B-2B	.170 to 1/8 inch Brass Reducer
BNCR-170B-332B	.170 to 3/32 inch Brass Reducer
BNCR-170B-532B	.170 to 5/32 inch Brass Reducer
BNCR-170B-564B	.170 to 5/64 inch Brass Reducer
BNCR-170B78B	.170 to .078 Brass Reducer
BNCR-2B-170B	1/8 inch to .170 Brass Reducer

SKU	Description
BNCR-2B-1B	1/8 inch to 1/16 inch Brass Reducer
BNCR-2B-2B	1/8 inch to 1/8 inch Brass Reducer
BNCR-2B-332B	1/8 inch to 3/32 inch Brass Reducer
BNCR-2B-3B	1/8 inch to 3/16 inch Brass Reducer
BNCR-2B-4B	1/8 inch to 1/4 inch Brass Reducer
BNCR-2B-532B	1/8 inch to 5/32 inch Brass Reducer
BNCR-2B-564B	1/8 inch to 5/64 inch Brass Reducer
BNCR-2B-5B	1/8 inch to 5/16 inch Brass Reducer
BNCR-2B-6B	1/8 inch to 3/8 inch Brass Reducer
BNCR-2B78B	1/8 inch to .078 Brass Reducer
BNCR-332B1B	3/32 inch to 1/16 inch Brass Reducer
BNCR-332B564B	3/32 inch to 5/32 inch Brass Reducer
BNCR-3B-170B	3/16 inch to .170 Brass Reducer
BNCR-3B-1B	3/16 inch to 1/16 inch Brass Reducer
BNCR-3B-2B	3/16 inch to 1/8 inch Brass Reducer
BNCR-3B-332B	3/16 inch to 3/32 inch Brass Reducer
BNCR-3B-3B	3/16 inch to 3/16 inch Brass Reducer
BNCR-3B-4B	3/16 inch to 1/4 inch Brass Reducer
BNCR-3B-532B	3/16 inch to 5/32 inch Brass Reducer
BNCR-3B-564B	3/16 inch to 5/64 inch Brass Reducer
BNCR-3B-5B	3/16 inch to 5/16 inch Brass Reducer
BNCR-3B-6B	3/16 inch to 3/8 inch Brass Reducer
BNCR-4B-170B	1/4 inch to .170 Brass Reducer
BNCR-4B-1B	1/4 inch to 1/16 inch Brass Reducer
BNCR-4B2B	1/4 inch to 1/8 inch Brass Reducer
BNCR-4B-332B	1/4 inch to 3/32 inch Brass Reducer
BNCR-4B-3B	1/4 inch to 3/16 inch Brass Reducer
BNCR-4B-532B	1/4 inch to 5/32 inch Brass Reducer
BNCR-4B-564B	1/4 inch to 5/64 inch Brass Reducer
BNCR-4B732B	1/4 inch to 7/32 inch Brass Reducer
BNCR-4B78B	1/4 inch to .078 Brass Reducer
BNCR-532B-1B	5/32 inch to 1/16 inch Brass Reducer
BNCR-532B-2B	5/32 inch to 1/8 inch Brass Reducer
BNCR-532B-332B	5/32 inch to 3/32 inch Brass Reducer
BNCR-532B-564B	5/32 inch to 5/64 inch Brass Reducer
BNCR-564B-1B	5/64 inch to 1/16 inch Brass Reducer
BNCR-5B-170B	5/16 inch to .170 Brass Reducer
BNCR-5B-1B	5/16 inch to 1/16 inch Brass Reducer
BNCR-5B-2B	5/16 inch to 1/8 inch Brass Reducer
BNCR-5B-332B	5/16 inch to 3/32 inch Brass Reducer
BNCR-5B-3B	5/16 inch to 3/16 inch Brass Reducer
BNCR-5B-4B	5/16 inch to 1/4 inch Brass Reducer
BNCR-5B-532B	5/16 inch to 5/32 inch Brass Reducer

SKU	Description
BNCR-5B-564B	5/16 inch to 5/64 inch Brass Reducer
BNCR-6-1	3/8 inch Barb to 1/16 inch Barb Bite Style
BNCR-6B-170B	3/8 inch to .170 Brass Reducer
BNCR-6B-1B	3/8 inch to 1/16 inch Brass Reducer
BNCR-6B-2B	3/8 inch to 1/8 inch Brass Reducer
BNCR-6B-332B	3/8 inch to 3/32 inch Brass Reducer
BNCR-6B-3B	3/8 inch to 3/16 inch Brass Reducer
BNCR-6B4B	3/8 inch to 1/4 inch Brass Reducer
BNCR-6B-532B	3/8 inch to 5/32 inch Brass Reducer
BNCR-6B-564B	3/8 inch to 5/64 inch Brass Reducer
BNCR-6B-5B	3/8 inch to 5/16 inch Brass Reducer
BNCR-6B732B	3/8 inch to 7/32 inch Brass Reducer
BNCR-732B078B	7/32 inch to .078 Brass Reducer
BNCR-732B1B	7/32 inch to 1/16 inch Brass Reducer
BNCR-732B332B	7/32 inch to 3/32 inch Brass Reducer
BNCR-78B1B	.078 to 1/16 inch Brass Reducer
BNCR-8B170B	1/2 inch to 170 Brass Reducer
BNCR-8B332B	1/2 inch Barb to 3/32 inch Barb
BNCR-8B4B	1/2 inch to 1/4 inch Brass Reducer
BNCR-8B6B	1/2 inch to 3/8 inch Brass Reducer

MEV SERIES



The MEV Series are brass MNPT thread with bite-style barbs at 60 degree to the flats. These elbows come in 3 different sizes of the angle between elbows - 60°, 90° and 120°. This series comes in MNPT thread sizes ranging from 1/8 inch to 3/8 inch and barb sizes ranging from 1/16 inch to 1/2 inch. Also available in Nickel-Plated Brass and 303 Stainless Steel.

SKU	Description
MEV60-2M1B	1/8 inch MNPT by 1/16 inch Barb 60° Brass Elbow
MEV60-2M2B	1/8 inch MNPT by 1/8 inch Barb 60° Brass Elbow
MEV60-2M332B	1/8 inch MNPT by 3/32 inch Barb 60° Brass Elbow
MEV60-2M3B	1/8 inch MNPT by 3/16 inch Barb 60° Brass Elbow
MEV60-2M4B	1/8 inch MNPT by 1/4 inch Barb 60° Brass Elbow
MEV60-2M532B	1/8 inch MNPT by 5/32 inch Barb 60° Brass Elbow

SKU	Description
MEV60-2M564B	1/8 inch MNPT by 5/64 inch Barb 60° Brass Elbow
MEV60-2M5B	1/8 inch MNPT by 5/16 inch Barb 60° Brass Elbow
MEV60-2M6B	1/8 inch MNPT by 3/8 inch Barb 60° Brass Elbow
MEV60-2M732B	1/8 inch MNPT by 7/32 inch Barb 60° Brass Elbow
MEV60-2M8B	1/8 inch MNPT by 1/2 inch Barb 60° Brass Elbow
MEV60-4M170B	1/4 inch MNPT by .170 inch Barb 60° Brass Elbow
MEV60-4M1B	1/4 inch MNPT by 1/16 inch Barb 60° Brass Elbow
MEV60-4M2B	1/4 inch MNPT by 1/8 inch Barb 60° Brass Elbow
MEV60-4M332B	1/4 inch MNPT by 3/32 inch Barb 60° Brass Elbow
MEV60-4M3B	1/4 inch MNPT by 3/16 inch Barb 60° Brass Elbow
MEV60-4M4B	1/4 inch MNPT by 1/4 inch Barb 60° Brass Elbow
MEV60-4M532B	1/4 inch MNPT by 5/32 inch Barb 60° Brass Elbow
MEV60-4M564B	1/4 inch MNPT by 5/64 inch Barb 60° Brass Elbow
MEV60-4M5B	1/4 inch MNPT by 5/16 inch Barb 60° Brass Elbow
MEV60-4M6B	1/4 inch MNPT by 3/8 inch Barb 60° Brass Elbow
MEV60-4M732B	1/4 inch MNPT by 7/32 inch Barb 60° Brass Elbow
MEV60-4M8B	1/4 inch MNPT by 1/2 inch Barb 60° Brass Elbow
MEV60-6M170B	3/8 inch MNPT by .170 Barb 60° Brass Elbow
MEV60-6M1B	3/8 inch MNPT by 1/16 inch Barb 60° Brass Elbow
MEV60-6M2B	3/8 inch MNPT by 1/8 inch Barb 60° Brass Elbow
MEV60-6M332B	3/8 inch MNPT by 3/32 inch Barb 60° Brass Elbow
MEV60-6M3B	3/8 inch MNPT by 3/16 inch Barb 60° Brass Elbow
MEV60-6M4B	3/8 inch MNPT by 1/4 inch Barb 60° Brass Elbow
MEV60-6M532B	3/8 inch MNPT by 5/32 inch Barb 60° Brass Elbow
MEV60-6M564B	3/8 inch MNPT by 5/64 inch Barb 60° Brass Elbow
MEV60-6M5B	3/8 inch MNPT by 5/16 inch Barb 60° Brass Elbow
MEV60-6M6B	3/8 inch MNPT by 3/8 inch Barb 60° Brass Elbow
MEV60-6M732B	3/8 inch MNPT by 7/32 inch Barb 60° Brass Elbow
MEV60-6M8B	3/8 inch MNPT by 1/2 inch Barb 60° Brass Elbow
MEV90-2M170B	1/8 inch MNPT by .170 Barb 90° Brass Elbow
MEV90-2M1B	1/8 inch MNPT by 1/16 inch Barb 90° Brass Elbow
MEV90-2M2B	1/8 inch MNPT by 1/8 inch Barb 90° Brass Elbow
MEV90-2M332B	1/8 inch MNPT by 3/32 inch Barb 90° Brass Elbow
MEV90-2M3B	1/8 inch MNPT by 3/16 inch Barb 90° Brass Elbow
MEV90-2M4B	1/8 inch MNPT by 1/4 inch Barb 90° Brass Elbow
MEV90-2M532B	1/8 inch MNPT by 5/32 inch Barb 90° Brass Elbow
MEV90-2M564B	1/8 inch MNPT by 5/64 inch Barb 90° Brass Elbow
MEV90-2M5B	1/8 inch MNPT by 5/16 inch Barb 90° Brass Elbow
MEV90-2M6B	1/8 inch MNPT by 3/8 inch Barb 90° Brass Elbow
MEV90-2M732B	1/8 inch MNPT by 7/32 inch Barb 90° Brass Elbow
MEV90-2M8B	1/8 inch MNPT by 1/2 inch Barb 90° Brass Elbow
MEV90-4M170B	1/4 inch MNPT by .170 inch Barb 90° Brass Elbow
MEV90-4M1B	1/4 inch MNPT by 1/16 inch Barb 90° Brass Elbow

SKU	Description
MEV90-4M2B	1/4 inch MNPT by 1/8 inch Barb 90° Brass Elbow
MEV90-4M332B	1/4 inch MNPT by 3/32 inch Barb 90° Brass Elbow
MEV90-4M3B	1/4 inch MNPT by 3/16 inch Barb 90° Brass Elbow
MEV90-4M4B	1/4 inch MNPT by 1/4 inch Barb 90° Brass Elbow
MEV90-4M532B	1/4 inch MNPT by 5/32 inch Barb 90° Brass Elbow
MEV90-4M564B	1/4 inch MNPT by 5/64 inch Barb 90° Brass Elbow
MEV90-4M5B	1/4 inch MNPT by 5/16 inch Barb 90° Brass Elbow
MEV90-4M6B	1/4 inch MNPT by 3/8 inch Barb 90° Brass Elbow
MEV90-4M732B	1/4 inch MNPT by 7/32 inch Barb 90° Brass Elbow
MEV90-4M8B	1/4 inch MNPT by 1/2 inch Barb 90° Brass Elbow
MEV90-6M170B	3/8 inch MNPT by .170 Barb 90° Brass Elbow
MEV90-6M1B	3/8 inch MNPT by 1/16 inch Barb 90° Brass Elbow
MEV90-6M2B	3/8 inch MNPT by 1/8 inch Barb 90° Brass Elbow
MEV90-6M332B	3/8 inch MNPT by 3/32 inch Barb 90° Brass Elbow
MEV90-6M3B	3/8 inch MNPT by 3/16 inch Barb 90° Brass Elbow
MEV90-6M4B	3/8 inch MNPT by 1/4 inch Barb 90° Brass Elbow
MEV90-6M532B	3/8 inch MNPT by 5/32 inch Barb 90° Brass Elbow
MEV90-6M564B	3/8 inch MNPT by 5/64 inch Barb 90° Brass Elbow
MEV90-6M5B	3/8 inch MNPT by 5/16 inch Barb 90° Brass Elbow
MEV90-6M6B	3/8 inch MNPT by 3/8 inch Barb 90° Brass Elbow
MEV90-6M732B	3/8 inch MNPT by 7/32 inch Barb 90° Brass Elbow
MEV90-6M8B	3/8 inch MNPT by 1/2 inch Barb 90° Brass Elbow
MEV120-2M170B	1/8 inch MNPT by .170 inch Barb 120° Brass Elbow
MEV120-2M1B	1/8 inch MNPT by 1/16 inch Barb 120° Brass Elbow
MEV120-2M2B	1/8 inch MNPT by 1/8 inch Barb 120° Brass Elbow
MEV120-2M332B	1/8 inch MNPT by 3/32 inch Barb 120° Brass Elbow
MEV120-2M3B	1/8 inch MNPT by 3/16 inch Barb 120° Brass Elbow
MEV120-2M4B	1/8 inch MNPT by 1/4 inch Barb 120° Brass Elbow
MEV120-2M532B	1/8 inch MNPT by 5/32 inch Barb 120° Brass Elbow
MEV120-2M564B	1/8 inch MNPT by 5/64 inch Barb 120° Brass Elbow
MEV120-2M5B	1/8 inch MNPT by 5/16 inch Barb 120° Brass Elbow
MEV120-2M6B	1/8 inch MNPT by 3/8 inch Barb 120° Brass Elbow
MEV120-2M732B	1/8 inch MNPT by 7/32 inch Barb 120° Brass Elbow
MEV120-2M8B	1/8 inch MNPT by 1/2 inch Barb 120° Brass Elbow
MEV120-4M170B	1/4 inch MNPT by .170 inch Barb 120° Brass Elbow
MEV120-4M1B	1/4 inch MNPT by 1/16 inch Barb 120° Brass Elbow
MEV120-4M2B	1/4 inch MNPT by 1/8 inch Barb 120° Brass Elbow
MEV120-4M332B	1/4 inch MNPT by 3/32 inch Barb 120° Brass Elbow
MEV120-4M3B	1/4 inch MNPT by 3/16 inch Barb 120° Brass Elbow
MEV120-4M4B	1/4 inch MNPT by 1/4 inch Barb 120° Brass Elbow
MEV120-4M532B	1/4 inch MNPT by 5/32 inch Barb 120° Brass Elbow
MEV120-4M564B	1/4 inch MNPT by 5/64 inch Barb 120° Brass Elbow
MEV120-4M5B	1/4 inch MNPT by 5/16 inch Barb 120° Brass Elbow

SKU	Description
MEV120-4M6B	1/4 inch MNPT by 3/8 inch Barb 120° Brass Elbow
MEV120-4M732B	1/4 inch MNPT by 7/32 inch Barb 120° Brass Elbow
MEV120-4M8B	1/4 inch MNPT by 1/2 inch Barb 120° Brass Elbow
MEV120-6M170B	3/8 inch MNPT by .170 inch Barb 120° Brass Elbow
MEV120-6M1B	3/8 inch MNPT by 1/16 inch Barb 120° Brass Elbow
MEV120-6M2B	3/8 inch MNPT by 1/8 inch Barb 120° Brass Elbow
MEV120-6M332B	3/8 inch MNPT by 3/32 inch Barb 120° Brass Elbow
MEV120-6M3B	3/8 inch MNPT by 3/16 inch Barb 120° Brass Elbow
MEV120-6M4B	3/8 inch MNPT by 1/4 inch Barb 120° Brass Elbow
MEV120-6M532B	3/8 inch MNPT by 5/32 inch Barb 120° Brass Elbow
MEV120-6M564B	3/8 inch MNPT by 5/64 inch Barb 120° Brass Elbow
MEV120-6M5B	3/8 inch MNPT by 5/16 inch Barb 120° Brass Elbow
MEV120-6M6B	3/8 inch MNPT by 3/8 inch Barb 120° Brass Elbow
MEV120-6M732B	3/8 inch MNPT by 7/32 inch Barb 120° Brass Elbow
MEV120-6M8B	3/8 inch MNPT by 1/2 inch Barb 120° Brass Elbow

DFA SERIES



The DFA Series is a Brass female NPT threads-to-bite-style barb adapter. Available in sizes ranging from 1/8 inch to 1/2 inch. This fitting has excellent vibration resistance and requires no clamp. The maximum working pressure is 150 psi and the temperature range is -65° F to 90° F. This fitting can be used in humidifiers, pneumatic systems, and filters.

SKU	Description
DFA-18170	1/8 inch FNPT by .170 ID Brass Female Adapter
DFA-18250	1/8 inch FNPT by .250 ID Brass Female Adapter
DFA-18332	1/8 inch FNPT by 3/32 inch ID Brass Female Adapter

DMT SERIES



The DMT Series are Brass male NPT by bite-style barb tee adapters that work well with Polyethylene tubing. Available MNPT thread sizes range from 1/16 inch to 1/4 inch and the ID sizes are .170 inch and .250 inch. This fitting has excellent vibration resistance and requires no clamp. The maximum working pressure is 150 psi and the temperature range is -65° F to 90° F. This fitting can be used in humidifiers, pneumatic systems, and filters.

SKU	Description
DMT-14250	1/4 inch MNPT by .250 inch ID Brass Barbed Tee Adapter
DMT-16170	1/16 inch MNPT by .170 inch ID Brass Barbed Tee Adapter
DMT-18170	1/8 inch MNPT by .170 inch ID Brass Barbed Tee Adapter
DMT-18250	1/8 inch MNPT by .250 inch ID Brass Barbed Tee Adapter




DME SERIES- ELBOW ADAPTER

The DME Series Brass male NPT thread by ID bite-style barb elbow adapter works well with Polyethylene tubing. Available in an MNPT size range from 1/16 inch to 3/8 inch, and an ID size range from .170 inch to .375 inch. This fitting has excellent vibration resistance and requires no clamp. The maximum working pressure is 150 psi and the temperature range is -65° F to 90° F. This fitting can also be used in climate control, pneumatic systems, and filters.

SKU	Description
DME-14250	1/4 inch MNPT by .250 inch ID Brass Multi-Barbed Elbow Adapter
DME-14375	1/4 inch MNPT by .375 inch ID Brass Multi-Barbed Elbow Adapter
DME-16170	1/16 inch MNPT by .170 inch ID Brass Multi-Barbed Elbow Adapter
DME-18170	1/8 inch MNPT by .170 inch ID Brass Multi-Barbed Elbow Adapter
DME-18250	1/8 inch MNPT by .250 inch ID Brass Multi-Barbed Elbow Adapter
DME-183332	1/8 inch MNPT by 3/32 inch ID Brass Multi-Barbed Elbow Adapter
DME-38375	3/8 inch MNPT by .375 inch ID Brass Multi-Barbed Elbow Adapter

CAE SERIES



The CAE Series are Brass 10-32 inch UNF by bite-style single barb adjustable fitting with slotted adjustment flush to the surface. Elbow and Tee configurations. Also available in Nickel-Plated.

SKU	Description
CAE-10170B	10-32 inch UNF by .170 inch Brass Adjustable Elbow
CAE-10X2B	10-32 inch UNF by .170 inch Brass Adjustable Elbow
CAE-101B	10-32 inch UNF by 1/16 inch Brass Adjustable Elbow
CAE-10332B	10-32 inch UNF by 3/32 inch Brass Adjustable Elbow
CAE-102B	10-32 inch UNF by 1/8 inch Brass Adjustable Elbow
CAE-10170B	10-32 inch UNF by .170 inch Brass Adjustable Elbow

SFWS SERIES



The SFWS Series is a female Brass multi-barb Swivel adapter with a gasket. It has female NPT threads to a hose barb attachment. The swivel has a full 360° rotation. The temperature range for this swivel is -40° F to 160° F at 150 psi.

*****This swivel is not recommended for water because of the fiber gasket. Air only.*****

SKU	Description
SFWS-2F4B	1/8 FNPT by 1/4 Barb Brass Swivel
SFWS-4F4B	1/4 FNPT by 1/4 Barb Brass Swivel
SFWS-4F5B	1/4 FNPT by 5/16 Barb Brass Swivel
SFWS-4F6B	1/4 FNPT by 3/8 Barb Brass Swivel
SFWS-6F4B	3/8 FNPT by 1/4 Barb Brass Swivel
SFWS-6F6B	3/8 FNPT by 3/8 Barb Brass Swivel
SFWS-6F8B	3/8 FNPT by 1/2 Barb Brass Swivel

SKU	Description
SFWS-8F6B	1/2 FNPT by 3/8 Barb Brass Swivel
SFWS-8F8B	1/2 FNPT by 1/2 Barb Brass Swivel
SFWS-12F8B	3/4 FNPT by 1/2 Barb Brass Swivel
SFWS-12F10B	3/4 FNPT by 5/8 Barb Brass Swivel



SSBM SERIES

The SSBM Series Multi-Barbed Hose Splicer Fitting is made of 303 Stainless Steel and is available in straight barb sizes of 1/4 inch and 3/8 inch. The available reducing barb size is 3/8 inch by 1/4 inch.

SKU	Description
SSBM-4B4B	1/4 Barb by 1/4 Barb Stainless Steel Splicer
SSBM-6B6B	3/8 Barb by 3/8 Barb Stainless Steel Splicer
SSBM-6B4B	3/8 Barb by 1/4 Barb Stainless Steel Splicer Reducer



DMA SERIES

The DMA Series a Brass male NPT thread to ID bite-style barb adapter that works well with Polyethylene tubing. This fitting has excellent vibration resistance and requires no clamp. The maximum working pressure is 150 psi and the temperature range is -65° F to 90° F. Available MNPT thread sizes are 1/16 inch, 1/8 inch, 3/8 inch, 1/4 inch, and 1/2 inch. ID sizes range from .170 inch to .375 inch.

SKU	Description
DMA-10170	10-32 inch male UNF by .170 inch ID Brass Adapter
DMA-12375	1/2 inch MNPT by .375 inch ID Brass Adapter
DMA-14170	1/4 inch MNPT by 7/32 inch ID Brass Adapter
DMA-14375	1/4 inch MNPT by .375 inch ID Brass Adapter
DMA-16170	1/16 inch MNPT by .170 inch ID Brass Adapter

SKU	Description
DMA-1618	1/16 inch MNPT by .250 inch ID Brass Adapter
DMA-18170	1/8 inch MNPT by .170 inch ID Brass Adapter
DMA-18250	1/8 inch MNPT by .250 inch ID Brass Adapter
DMA-18332	1/8 inch MNPT by 3/32 inch ID Brass Adapter
DMA-38375	3/8 inch MNPT by .375 inch ID Brass Adapter

SMRI SERIES



The SMRI Series Barbed Nickel-Plated Brass Quick Connect Plugs resist corrosion, have a maximum input pressure of 500 psi, a temperature range of -4° F to 210° F, and are designed to fit with the ***SMRC Series*** Quick Coupler bodies.

SKU	Description
SMRI-3B	3/16 inch Barbed Brass Plug
SMRI-532B	5/32 inch Barbed Brass Plug
SMRI-1032F	10-32 inch Female Brass Plug
SMRI-1032M	10-32 inch Male Brass Plug
SMRI-18B	1/8 inch Barbed Brass Plug



SMRC SERIES

The SMRC Series Brass Nickel-Plated Quick Couplers resist corrosion, have a temperature range of -4° F to 210° F, a maximum input pressure of 500 psi, Buna-N seals, and are available in either valved or non-valved configurations. Optional Shut-off. Panel Mounts available with SMRI Series Barbed. For use with or without the ***SMRI Series*** quick connectors.

SKU	Description
SMRC-3B	3/16 inch Barbed Brass Quick Coupler
SMRC-532B	5/32 inch Barbed Brass Quick Coupler
SMRC-1032F	10-32 Female Brass Quick Coupler
SMRC-1032M	10-32 Male Brass Quick Coupler
SMRC-18B	1/8 inch Barbed Brass Quick Coupler
SMRC-18M	1/8 inch Male Barbed Brass Quick Coupler



NVS SERIES

The compact design of this Brass Needle Valve allows for multiple configurations; straight or 90° elbow. It has a 500 psi rating and its maximum operating temperature is 180° F. The through hole diameter is .156. The stem seal is PTFE and the needle is available in Brass or Stainless Steel. The knob options are black-filled Polyester, yellow-filled polyester, or no knob. To enable panel mounting, a brass hex nut is supplied. The inlet sizes are 1/4" female NPT and 1/4" male and female NPT; the outlet size is 1/4" female NPT.

SKU	Description
NVS-4F	1/4 inch FNPT Inline Needle Valve
NVSA-4F	1/4 inch FNPT Right Angle Needle Valve
NVSA-4F4M	1/4 inch Male Inlet 1/4 Female Outlet Needle Valve



SPNV SERIES

Mini Brass 90° Needle Valve with an inlet of 1/8" male threads. Outlet sizes are female 10-32 threads, male 10-32 threads or 1/16", 1/8", and 3/32" barbs. Available seals are Buna-N, EPDM, and Viton®. The maximum operating pressure is 125 psi, maximum operating temperature is 180° F. Panel mount is standard. This Needle Valve is also available with female 10-32 UNF inlet and outlet threads. The barb sizes are the same as for the male Needle Valve. The black ABS knobs are standard, removable knobs.

SKU	Description
SPNV-10F10F	10-32F by 10-32F Needle Valve
SPNV-2M10F	1/8 MNPT In by 10-32 Female Out Needle Valve
SPNV-2M1B	1/8 MNPT In by 1/16 Barb Out Needle Valve
SPNV-10F2B	10-32 Female UNF In by 1/8 Barb Out Needle



MNV SERIES

Mini Brass 90° Needle Valve with an inlet of 10-32 male threads. Outlet sizes are female 10-32 threads, male 10-32 threads or 1/16", 1/8" and 3/32" barbs. Available seals are Buna-N, EPDM, and Viton®. The maximum operating pressure is 125 psi, maximum operating temperature is 180° F. Panel mount is standard.

SKU	Description
MNV-10M10F	10-32 Male inlet Female outlet Needle Valve
MNV-10F10M	10-32 Female inlet Male outlet Needle Valve
MNV-10F-10F	10-32 Female Nickel Needle Valve
MNV-18M10F	1/8 inch Male NPT 10-32 Female Needle Valve

FNV SERIES



The FNV Series Needle Valves are of Brass with 10-32 male taper threads or 1/8 inch NPT to a 10-32 Female port. 10-32 is available with a knurled knob. Buna seals (FKM Optional), 150 psi service. 1/8 inch NPT is Panel Mountable.

SKU	Description
FNV-10F10F	10-32 Male by Female Needle Valve
FNV-10M10F	10-32 Male Female Needle Valve
FNV-18M10F	1/8 MNPT by 10-32 Female Needle Valve

PNFC SERIES



Mini Brass 90° Needle Valve with an inlet of 10-32 male threads. Outlet sizes are female 10-32 threads, male 10-32 threads or 1/16", 1/8" and 3/32" barbs. Available seals are Buna-N, EPDM, and Viton®. The maximum operating pressure is 125 psi. Panel mount is standard.

SKU	Description
PNFC-10M10F	10-32 Taper Male by 10-32 Female Brass



VNAT SERIES

Nickel Plated Panel Mount Needle Valve with a 3° pin angle, 64 TPI for fine adjustment. Buna-N seal standard and it has a screwdriver slot for easy adjustment. Operating temperature -40° F to 200° F. The recommended filtration is 5 microns. Barbed fittings for flexible tubing.

SKU	Description
VNAT-16	1/16 inch Barbed Needle Valve
VNAT-18	1/8 inch Barbed Needle Valve
VNAT-1B-K-PM	1/16 inch Barbed NPB KNOB PM Needle Valve
VNAT-1B-S-PM	1/16 inch Barbed NPB Slotted with PM Needle Valve
VNAT-2B-K-PM	1/8 inch Barbed NPB KNOB with PM Needle Valve




BSL SERIES

The BSL Series are Detent Panel Mount 5-Way Ball Valves in 10-32, 1/8 inch Female NPT, 1/4 inch Female NPT, 1/8 inch Male NPT, or 1/4 inch Male NPT with EPDM seals and 500 psi.

SKU	Description
BSL-1032F	10-32 FNPT Panel Mount 5-Way Ball Valve
BSL-2F	1/8 inch FNPT Panel Mount 5-Way Ball Valve
BSL-4F	1/4 inch FNPT Panel Mount 5-Way Ball Valve
BSL-2M	1/8 inch MNPT Panel Mount 5-Way Ball Valve
BSL-4M	1/4 inch MNPT Panel Mount 5-Way Ball Valve


MSBV SERIES

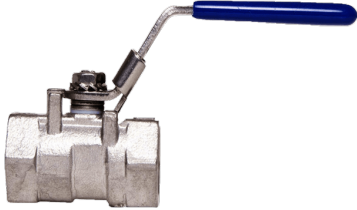

The MSBV Series Ball Valves have a Stainless Steel body, ball, stem, and insert with an 800 psi WOG and PTFE thrust washer. 304 Stainless Steel locking handle. Full ported 1000 psi WoG 2 piece version up to 2-inch Female NPT available.

SKU	Description
MSBV-4F	1/4 FNPT 316 Stainless Ball Valve
MSBV-6F	3/8 FNPT 316 Stainless Ball Valve
MSBV-8F	1/2 FNPT 316 Stainless Ball Valve
MSBV-12F	3/4 FNPT 316 Stainless Ball Valve
MSBV-16F	1 inch FNPT 316 Stainless Ball Valve
MSBV-20F	1-1/4 FNPT 316 Stainless Ball Valve
MSBV-24F	1-1/2 FNPT 316 Stainless Ball Valve


GEV SERIES



The GEV Series Shut-off Ball Valves available in either Brass or Aluminum.

SKU	Description
GEV-4M6B	1/4 Male NPT by 3/8 Barb Ball Valve
GEV-6M6B	3/8 Male NPT by 3/8 Barb Ball Valve
GEV-8M8B	1/2 Male NPT by 1/2 Barb Ball Valve


MASV SERIES

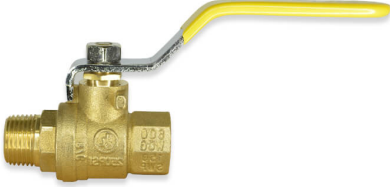

The MASV series are forged Brass Ball Valves with NBR O-rings 200 psi WOG

SKU	Description
MASV-2M2F	1/8 MNPT by 1/8 FNPT Forged Mini Ball Valve
MASV-2M4F	1/8 MNPT by 1/4 FNPT Forged Mini Ball Valve
MASV-4M4F	1/4 MNPT by 1/4 FNPT Forged Mini Ball Valve
MASV-6M6F	3/8 MNPT by 3/8 FNPT Forged Mini Ball Valve
MASV-4M6F	1/4 MNPT by 3/8 FNPT Forged Mini Ball Valve
MASV-8M8F	1/2 MNPT by 1/2 FNPT Forged Mini Ball Valve
MASV-2M	1/8 MNPT by 1/8 MNPT Forged Mini Ball Valve
MASV-4M	1/4 MNPT by 1/4 MNPT Forged Mini Ball Valve
MASV-6M	3/8 MNPT by 3/8 MNPT Forged Mini Ball Valve
MASV-8M	1/2 MNPT by 1/2 MNPT Forged Mini Ball Valve
MASV-4B8M	1/4 Barb by 1/8 MNPT Forged Mini Ball Valve
MASV-4B4M	1/4 Barb by 1/4 MNPT Forged Mini Ball Valve
MASV-6B4M	3/8 Barb by 1/4 MNPT Forged Mini Ball Valve
MASV-6B6M	3/8 Barb by 3/8 MNPT Forged Mini Ball Valve
MASV-8B8M	1/2 Barb by 1/2 MNPT Forged Mini Ball Valve

AMS SERIES



AMS Series Ball Valves available in inline, elbows, and 3-way tee configurations, are Chrome Plated Brass with female NPT, male NPT, and Push-to-Connect ports. They all have a temperature range of 0° F to 175° F and are recommended for air, oil, water, and gas use.

The thread sizes for the female-to-female and female-to-male valves are 1/8", 1/4", 3/8", and 1/2". The tube sizes for the Push-to-Connect valves are 1/8" by 1/8", 1/4" by 1/4" and 3/8" by 3/8".

On the male NPT by Push-to-Connect, the sizes are 5/32" tube by 1/8" MNPT, 1/4" tube by 1/8" MNPT, 1/4" tube by 1/4" MNPT, and 3/8" tube by 3/8" MNPT.

The elbow and tee sizes are 1/8", 1/4" and 3/8". The elbows and tees are panel-mountable and the tees are available with open or closed centers.

SKU	Description
AMS-2-2F	1/8 inch FNPT 2 Port Valve Closed Center Ball Valve
AMS-2-4F	1/4 inch FNPT 2-Port Chrome-Plated Ball Valve
AMS-2-6F	3/8 inch FNPT 2-Port Chrome-Plated Ball Valve
AMS-2F	1/8 inch FNPT by 1/8 inch FNPT 2-Port Straight Ball Valve
AMS-2FOC	1/8 inch FNPT by 1/8 inch FNPT Open Center 2-Port Ball Valve
AMS-2M	1/8 inch MNPT by 1/8 inch FNPT 2-Port Ball Valve
AMS-2M532PI	1/8 inch FNPT by 5/32 inch OD Straight Push-In 2-Port Ball Valve
AMS-2MF	1/8 inch MNPT by 1/8 inch FNPT 2-Port Straight Ball Valve
AMS-3-2F	1/8 inch FNPT 3-Port Valve Open Center Ball Valve
AMS-3-4F	1/4 inch FNPT 3-Port Ball Valve
AMS-3-6F	3/8 inch FNPT 3-Port Ball Valve
AMS-L-2F	1/8 inch FNPT 90 degree Elbow Ball Valve PM
AMS-L-4F	1/4 inch FNPT 90 degree Elbow Ball Valve PM
AMS-L-6F	3/8 inch FNPT 90 degree Elbow Ball Valve PM



MBBV SERIES

The MBBV Series are standard Ported Forged Brass WOG Ball Valves that can withstand up to 400 psi with a chrome-plated ball and Buna O-rings. NSF 61, Full port available, 948 NSF full port Male by Female also available.


SKU	Description
MBBV-8F	1/2 inch Female Full Port Brass 600 psi WOG Ball Valve
MBBV-4F	1/4 inch Female Brass Ball Valve 600 psi Ball Valve
MBBV-6F	3/8 inch Female Brass Ball Valve 600 psi Ball Valve
MBBV-12F	3/4 inch Female Brass Ball Valve 600 psi Ball Valve
MBBV-16F	1 inch Female Brass Ball Valve 600 psi Ball Valve
MBBV-20F	1-1/4 inch Female Brass Ball Valve 600 psi Ball Valve
MBBV-24F	1-1/2 inch Female Brass Ball Valve 600 psi Ball Valve
MBBV-32F	2 inch Female Brass Ball Valve 600 psi Ball Valve
MBBV-40F	2-1/2 inch Female Brass Ball Valve 600 psi Ball Valve
MBBV-48F	3 inch Female Brass Ball Valve 600 psi Ball Valve
MBBV-64F	4 inch Female Brass Ball Valve 600 psi Ball Valve



BBM SERIES

The BBM Series multi-barbed Brass Bulkheads were a special order made for Pneuline Supply Inc. These bulkheads have 7/16-24 UNS threads for mounting. The multi-barb sizes are 1/4 inch by 1/4 inch, 1/4 inch by 3/8 inch, and 3/8 inch by 3/8 inch.

SKU	Description
BBM-4B	1/4 inch 7/16-24 Multi-Barbed Brass Bulkhead
BBM-4B6B	1/4 inch 7/16-24 3/8 inch Multi-Barbed Brass Bulkhead
BBM-6B	3/8 inch 7/16-24 Multi-Barbed Brass Bulkhead



BB SERIES

Brass Bulkheads with Bite-Style Barbs. 10-32 mounting Threads for 1/16 inch, .078, and 3/32 inch. 1/4-28 mounting Thread with 1/16 inch thru hole to 5/32 inch Barb. 5/16-24 mounting Thread with 1/16 inch thru hole to 3/16 inch Barb. 3/8-24 mounting Thread with 1/16 inch thru-hole to 3/8 inch Barb. Mixed sizes are available for Straight and Elbow models.

SKU	Description
BB-10-170B078B	10-32 by .170 by .078 Barb Brass Reducing Bulkhead
BB-10-170B332B	10-32 by .170 by 3/32 Barb Brass Reducing Bulkhead
BB-10-1B	10-32 by 1/16 Barb Brass Bulkhead
BB-10-2B1B	10-32 by 1/8 by 1/16 Barb Brass Reducing Bulkhead
BB-10-332B	10-32 by 3/32 Barb Brass Bulkhead
BB-10-332B1B	10-32 by 3/32 by 1/16 Barb Brass Reducing Bulkhead
BB-10-332B1B-NP	10-32 by 3/32 by 1/16 Barb Nickel Plated Bulkhead
BB-14-2B	1/4-28 by 1/8 Barb Brass Bulkhead
BB-14-6B1B	1/4-28 by 3/8 by 1/16 Barb Brass Reducing Bulkhead
BB-14-O-2B	1/4-28 by 1/8 Barb Brass Reducing Bulkhead O-ring
BB-1M-5B332B	1/16 NPT 5/16 by 3/32 Barb Brass Reducing Bulkhead
BB-2M-5B332B	1/8 NPT 5/16 by 3/32 Barb Brass Reducing Bulkhead

SKU	Description
BB-2M-6B4B	1/8 NPT 3/8 by 1/4 Barb Brass Reducing Bulkhead
BB-38-3B-SS	3/8-24 3/16 Barb 303 Stainless Bulkhead
BB-38-4B	3/8-24 1/4 Barb Brass Bulkhead
BB-38-4B-170B	3/8-24 by 1/4 by .170 Barb Brass Reducing Bulkhead
BB-38-4B-170B-SS	3/8-24 by 1/4 by .170 Barb Stainless Steel Bulkhead
BB-38-4B-3B	3/8-24 by 1/4 by 3/16 Barb Brass Reducing Bulkhead
BB-38-4B-NP	3/8-24 by 1/4 Barb Brass Nickel Plated Bulkhead
BB-38-4B-SS	3/8-24 by 1/4 Barb 303 Stainless Bulkhead
BB-38-6B1B	3/8-24 by 3/8 by 1/16 Barb Brass Reducing Bulkhead
BB-38-6B2DB	3/8-24 by 3/8 by 1/8 Double Barb Brass Reducing Bulkhead
BB-38-6B2DB-020	3/8-24 by 3/8 by 1/8 Double Barb, 020 Orifice Brass Reducing Bulkhead
BB-38-6B4B	3/8-24 by 3/8 by 1/4 Barb Brass Reducing Bulkhead
BB-516-170532	5/16-24 by .170 by 5/32 Barb Brass Reducing Bulkhead
BB-516-170732	5/16-24 by .170 by .732 Barb Brass Reducing Bulkhead
BB-516-170B	5/16-24 by .170 Barb Bulkhead




LSSB SERIES

The LSSB Series are 316 Stainless Steel Bulkheads, available in sizes ranging from 1/8 inch, 1/4 inch, 3/8 inch, and 1/2 inch FNPT. The maximum working pressure for these bulkheads is 150 psi and the working temperature range is -4°F to 356°F. For larger sizes with gasket options please see our **BLSS series**.

SKU	Description
LSSB-2	1/8 inch FNPT 316 Stainless Steel Bulkhead
LSSB-4	1/4 inch FNPT 316 Stainless Steel Bulkhead
LSSB-6	3/8 inch FNPT 316 Stainless Steel Bulkhead
LSSB-8	1/2 inch FNPT 316 Stainless Steel Bulkhead


FCBH SERIES



The FCBH Series Brass or Nickel-Plated Brass Bulkheads come standard with two Steel lock washers in sizes ranging from 10-32 to 1/4 inch Female NPT. The 10-32 is 1/2 inch long, all other sizes are 1 inch in length.

SKU	Description
FCBH-1032	10-32 Female UNF by 1/2-32 Brass Bulkhead Fitting
FCBH-14	1/4 FNPT by 3/4-20 Brass Bulkhead Fitting
FCBH-18	1/8 FNPT by 3/4-20 Brass Bulkhead Fitting

FBH BRASS SERIES



FBH Series inline Brass Bulkheads. FNPT both sides with exceptions, Elbow and several MNPT By FNPT. Brass Bulkhead sizes ranging from 1/8 inch FNPT thru 1 inch FNPT, Male to FNPT products are all 1/2 MNPT Dry seal located on the outside of the panel and FNPT on the inside of the panel, 1/4 or 3/8 FNPT. Zinc-Plated Steel optional,

For Stainless Steel (303 and 316), Nickel-Plated Brass, and Aluminum see MSSB Series. Additional 316 Stainless steel see our LSSB series.

SKU	Description
FBH-12F	1/2 inch Female 1-1/8, 14 UNS Bulkhead
FBH-12F12M	1/2 inch Female by 1/2 inch Male Bulkhead
FBH-12M	1/2 inch Male by 1/2 inch Male Bulkhead
FBH-12M14F	1/2 inch Male 1/4 inch Female Bulkhead
FBH-12M38F	1/2 inch Male 3/8 inch Female Bulkhead
FBH-14F	1/4 inch Female 3/4-16 UNF Bulkhead
FBH-14X	1/4 inch Female 3/4-16 UNF 1 1/2 inch length Bulkhead
FBH-18F	1/8 Female 5/8-18 UNF Bulkhead
FBH-38F	3/8 inch Female 1/14 UNF Bulkhead
FBH-38F12M	3/8 inch Female by 1/2 inch Male Bulkhead
FBH-38F-E	3/8 inch Female by 3/8 inch Female Elbow Bulkhead

EBHF SERIES



The EBHF Series is a tank flange 90° elbow Bulkhead. This series is available in Aluminum, Brass, and Stainless Steel. Female NPT thread sizes for this series are 1/4 inch, 3/8 inch, and 1/2 inch. Barb sizes for this series are 5/16 inch and 3/8 inch.

SKU	Description
EBHF-4F5B	1/4 inch Female NPT by 5/16 inch Barbed Bulkhead
EBHF-4FE5B	1/4 inch Female NPT by 5/16 inch Barbed 90° Elbow Bulkhead
EBHF-6FE6B	3/8 inch Female NPT by 3/8 inch Barbed 90° Elbow Brass Bulkhead
EBHF-6FE6B-SS	3/8 inch Female NPT by 3/8 inch Barbed 90° Elbow Stainless Steel Bulkhead
EBHF-8FE6B	1/2 inch Female NPT by 3/8 inch Barbed 90° Elbow Bulkhead

DBH SERIES



The DBH Series Bulkhead is made of brass with bite-style barb connectors. The barb sizes are 1/4 inch and 3/8 inch. This tube fitting is low-pressure and for use with air and water. The maximum pressure is 100 psi at 72°F.

SKU	Description
DBH-170	.170 Bulkhead
DBH-250	.250 Bulkhead




CTBH SERIES

The CTBH is a 303 Stainless Steel Bulkhead Series of female-to-female and Female to Male in sizes ranging from 10-32 to 1/4 inch.

SKU	Description
CTBH-10F18F	10-32 Female by 1/8 FNPT 303 Stainless Steel Bulkhead
CTBH-18M14F	1/8 MNPT by 1/4 FNPT 303 Stainless Steel Bulkhead
CTBH-10F10F	10-32 Female by 10/32 Female 303 Stainless Steel Bulkhead
CTBH-14M14F	1/4 MNPT by 1/4 FNPT 303 Stainless Steel Bulkhead

BLSS SERIES



The BLSS Series is a Stainless Steel Bulkhead in sizes ranging from 3/4 inch to 3 inches with either an EPDM or FKM gasket.

SKU	Description
BLSS-12	3/4 FNPT 316 Stainless Steel Bulkhead
BLSS-24	1-1/2 inch FNPT 316 Stainless Steel Bulkhead with EPDM Gasket
BLSS-32	2 inch FNPT 316 Stainless Steel Bulkhead with EPDM Gasket
BLSS-40	1-1/2 inch FNPT 316 Stainless Steel Bulkhead
BLSS-48	3 inch FNPT 316 Stainless Steel Bulkhead with EPDM Gasket



BBE SERIES

Brass Bulkheads with Bite-Style Barbs. 10-32 inch UNF mounting Threads for 1/16 inch, .078 inch, and 3/32 inch. 1/4-28 inch mounting Thread with 1/16 inch thru hole to 5/32 inch Barb. 5/16-24 inch mounting Thread with a 1/16 inch thru hole to 3/16 inch Barb. 3/8-24 inch mounting Thread with a 1/16 inch thru hole to 3/8 inch Barb. Mixed sizes are available for Straight and Elbow models.

SKU	Description
BBE10-1B	10-32 by 1/16 Barbed Elbow Bulkhead
BBE10-332B	10-32 by 3/32 Barbed Elbow Bulkhead
BBE10-78B	10-32 by .078 Barbed Elbow Bulkhead
BBE14-170B	1/4-28 by .170 Barbed Elbow Bulkhead
BBE14-2B	1/4-28 by 1/8 Barbed Elbow Bulkhead
BBE14-532B	1/4-28 by 5/32 Barbed Elbow Bulkhead
BBE38-4B	3/8-24 by 1/4 Barbed Elbow Bulkhead
BBE516-170B	5/16-24 by .170 Barbed Elbow Bulkhead
BBE516-2B	5/16-24 by 1/8 Barbed Elbow Bulkhead
BBE516-532B	5/16-24 by 5/32 Barbed Elbow Bulkhead


VRV SERIES



This is a vent-to-atmosphere Relief Valve. It is an accurate design that offers repeatability and dependability. Cracking pressure is set and tested for accuracy. Male NPT threads in 1/4", 3/8", and 1/2" sizes. Maximum pressure is 200 psi. Made of Nickel-plated Brass, 303 Stainless Steel and Brass. An optional dust cover is available.

SKU	Description
VRV-14-10E-CAL	1/4 inch Male NPT 10 psi EPDM Cap Aluminum Relief Valve
VRV-14-10-NP	1/4 inch Male NPT 10 psi Nickel-Plated Relief Valve
VRV-12-90	1/2 inch Male NPT 90 psi Brass Relief Valve
VRV-38-30-303	3/8 inch Male NPT 30 psi 303 Stainless Steel Relief Valve

EBH SERIES



The EBH Series Single-Barbed Bulkheads are of either Brass or Aluminum in 1/4 inch, 5/16 inch, 3/8 inch, 5/16 to 3/8 inch, or a 1/4 FNPT by 5/16 inch Barb. A nut, washer, and cap come standard with the Barb to Barb versions (as shown).

SKU	Description
EBH-4B	1/4 inch Brass Barbed Bulkhead
EBH-4F5B	1/4 inch Female NPT by 5/16 inch Brass Barbed Bulkhead
EBH-5B	5/16 inch Barbed Brass Bulkhead
EBH-5B6B	5/16 inch by 3/8 inch Barbed Brass Bulkhead
EBH-6B	3/8 inch Barbed Bulkhead Brass Bulkhead